


– weishaupt –

product

Information on oil, gas and dual-fuel burners

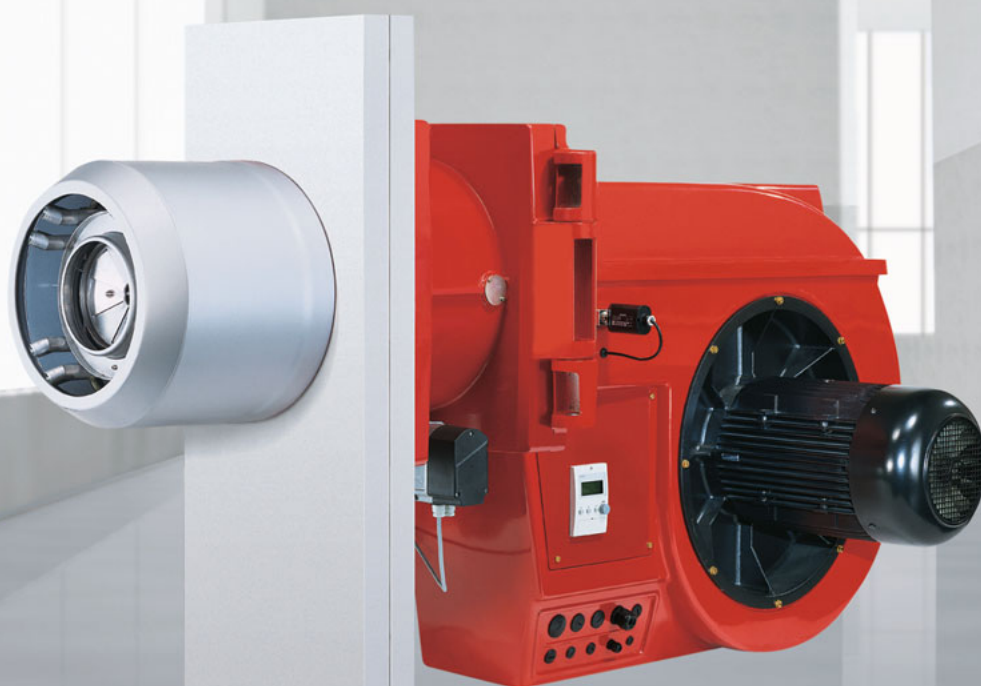

Industrial burners

Industrial burners (1,000 – 11,700 kW) • versatile and reliable

Weishaupt industrial burners: Versatile and reliable

Worldwide, for more than 50 years, Weishaupt industrial burners have been a benchmark for reliability, energy efficiency, noise emissions, and ease of use.

With ratings between 1,000 and 11,700 kW, the spectrum of possible applications ranges from heating and steam boilers to air heaters and the latest heavy-duty boilers.


Weishaupt's broad range of industrial burners can be used with almost any gaseous or liquid fuel, ensuring there is the right burner for virtually every job.

Digital combustion management is included as standard. It not only regulates the burners' economical fuel consumption, but it also simplifies operation and servicing. Moreover, it facilitates integration and communication with other PLC devices and building management systems.

The burners' well-arranged construction means all of their components are readily accessible, enabling fast and reliable servicing and thus a faster recommissioning.

The combination of select materials, experience gained over decades in a modern research and development institute, and an extensive service network guarantee Weishaupt's renowned reliability.



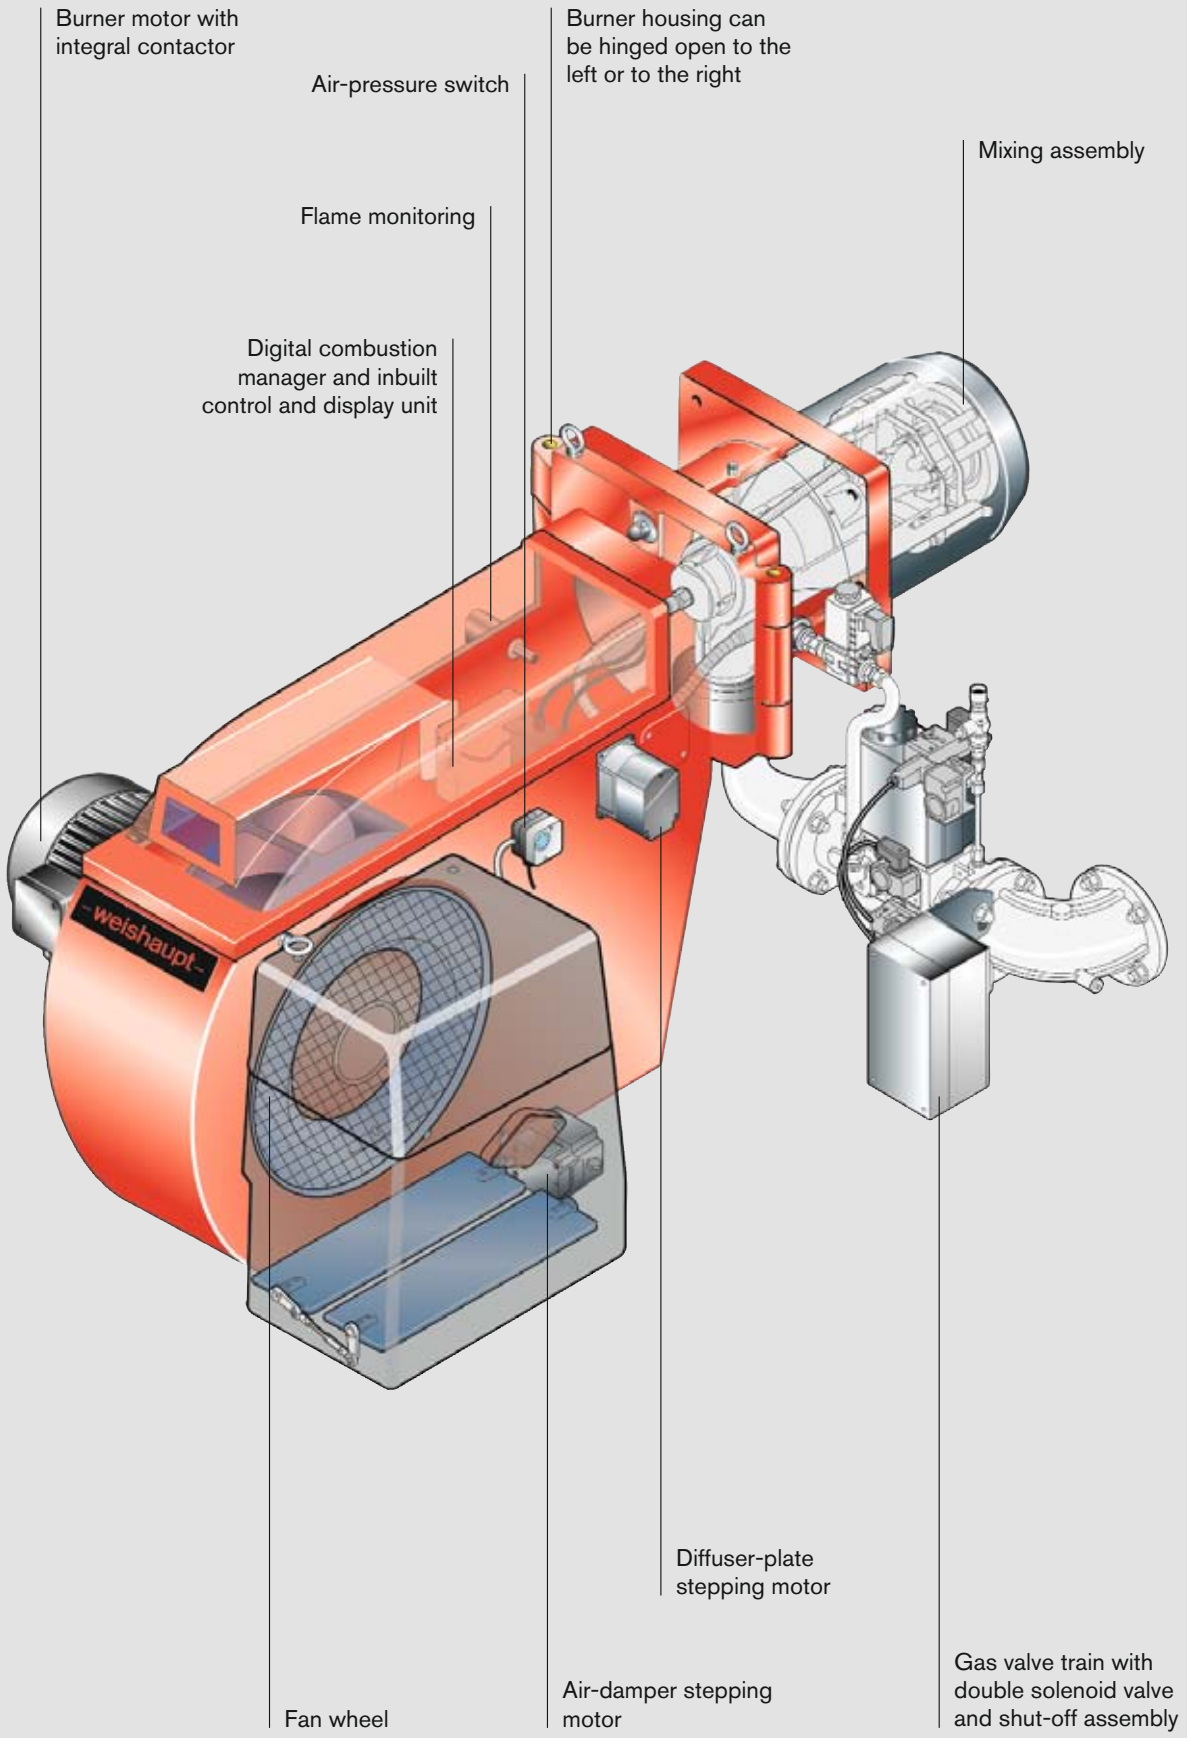

Contents

Standard version oil burners			
Burner selection	10	3LN version multiflam® oil burners	
Scope of delivery / special equipment	14	Burner selection	65
Technical data	15	Scope of delivery / special equipment	66
		Technical data	66
NR version gas burners		3LN version multiflam® gas burners	
Burner selection	20	Burner selection	67
Gas valve train sizing	22	Gas valve train sizing	69
Scope of delivery / special equipment	25	Scope of delivery / special equipment	72
Technical data	26	Technical data	73
1LN version gas burners		3LN version multiflam® dual-fuel burners	
Burner selection	27	Burner selection	74
Gas valve train sizing	28	Gas valve train sizing	77
Scope of delivery / special equipment	30	Scope of delivery / special equipment	80
Technical data	31	Technical data	81
LN version gas burners		Dimensions	83
Burner selection	32		
Gas valve train sizing	34	Fuel systems	86
Scope of delivery / special equipment	36		
Technical data	37	Pump and preheater stations	88
NR version dual-fuel burners			
Burner selection	40		
Gas valve train sizing	45		
Scope of delivery / special equipment	50		
Technical data	52		
1LN version dual-fuel burners			
Burner selection	56		
Gas valve train sizing	58		
Scope of delivery / special equipment	60		
Technical data	61		

Weishaupt industrial burners: Powerful and versatile

Weishaupt industrial series burners have been designed especially for industrial applications. The monobloc burners are noteworthy for their large capacity and their versatility, as well as numerous other interesting details:

Versatility

The burners can be used on heat exchangers such as hot water boilers, steam boilers, or air heaters, and for certain process applications. As the burners are capable of overcoming high combustion chamber resistances, they are primarily used on heavy-duty boilers.

Digital combustion management

Digital combustion management ensures the simple and safe operation of combustion plant. All important functions, such as fuel and air supply or flame monitoring, are controlled with digital precision. Operational functions are optimised, economy is maximised and emissions are minimised. The integral bus interface enables all necessary data and functions to be relayed to a master control system

Energy saving with VSD and O₂ trim

Electrical consumption is definitely a cost factor for large combustion plant. Variable speed drive (VSD) uses a frequency convertor to match the speed of the fan to the actual air requirement, allowing for sizeable electrical savings, particularly at partial load.

With O₂ trim, flue gases are continuously monitored to ensure the best possible degree of combustion efficiency and thus lower fuel consumption and increased reliability.

Fuels

- Light fuel oil (EL)
max. viscosity 6 mm²/s at 20 °C
in accordance with DIN 51 603
- Medium and heavy fuel oils (S)
max. viscosity 50 mm²/s at 100 °C
in accordance with DIN 51 603
- Natural Gas (E/LL)
- LPG (B/P)

Permissible ambient conditions

- Ambient temperature during operation
-10 to +40 °C (oil/dual-fuel burners)
-15 to +40 °C (gas burners)
- Humidity: max. 80 % relative humidity,
no condensation
- Suitable for operation indoors only
- For plant in unheated areas, certain
further measures may be required
(please enquire)

Use of the burner for other applications or in ambient conditions not detailed above is not permitted without the prior written agreement of Max Weishaupt GmbH. Service intervals will be reduced in accordance with the more extreme operational conditions.

Certification

The burners are tested by an independent body and conform to the following standards and EU directives:

- EN 267 and EN 676
- Machinery Directive, 98/37/EC and 2006/42/EC
- Electromagnetic Compatibility Directive, 2004/108/EC
- Low Voltage Directive, 2006/95/EC
- Gas Appliance Directive 90/396/EEC
- Pressure Vessel Directive, 97/23/EC
- The burners carry CE and CE-PIN marks in accordance with 90/396/EEC

Outstanding service

Weishaupt maintains an extensive global sales and service network. Customer service is available every day around the clock. In-house training by Weishaupt ensures the high standard of their service engineers.

The most important advantages:

- Large capacity and range of applications
- Stable fan characteristics
- Good combustion behaviour
- Burner housing can be hinged open
- Easy to install, commission and service
- Increased safety provided by nozzle-head shut-off device with solenoid
- Nozzle recirculation and precise oil temperature regulation on heavy oil burners
- Compliance with all current emission standards worldwide
- Higher turndown (RL, RGL)

Characteristics

Standard version

Oil, gas, and dual-fuel burners for installations with no particular NO_x emission limits. Suitable for natural gas, LPG, and light and heavy oil, as well as special oils and gases upon application. Type-tested, standard-version, natural-gas and light-oil burners meet NO_x Class 1 requirements.

NR version

Gas and dual-fuel burners with a more advanced version of the standard mixing assembly for installations with gas-side NO_x emission limits. Compared to standard-version burners, NR-version burners have lower NO_x emissions when firing on gas. Oil-side emissions remain the same. Suitable for natural gas, LPG, and light and heavy oil. Type-tested, NR-version, natural-gas, LPG, and light-oil burners meet NO_x Class 2 (or Class 3) requirements when firing on gas and NO_x Class 1 requirements when firing on oil.

1LN version

Low-NO_x gas and dual-fuel burners with a special mixing assembly for installations with gas and oil-side NO_x emission limits. 1LN-version burners have lower NO_x emissions than NR-version burners. Suitable for natural gas, LPG, and light oil. Type-tested, 1LN-version, natural-gas, LPG, and light-oil burners meet NO_x Class 3 requirements when firing on gas and NO_x Class 2 requirements when firing on oil.

LN version

Low-NO_x gas burners with a special mixing assembly for installations with gas-side NO_x emission limits. LN-version burners have lower NO_x emissions than 1LN-version burners. Suitable for natural gas and LPG. Type-tested, LN-version, natural-gas burners meet NO_x Class 3 requirements.

3LN version

Ultra-Low-NO_x oil, gas, and dual-fuel burners with multiflam® mixing assemblies for installations with extremely low NO_x emission limits (suitable for three-pass and through-pass boilers only). The burners' extremely low NO_x emissions are achieved using a special fuel distribution system. Type-tested, 3LN-version, natural-gas and light-oil burners meet NO_x Class 3 requirements.

Notes

Gas-firing standard, NR, 1LN, and 3LN-version burners are equipped with a gas pilot line.


Project-specific NO_x emission figures can be found in our list of guaranteed NO_x figures (Print No. 83097202).

Combustion figures will vary, depending on combustion chamber geometry, volumetric loading and boiler design. The basic conditions listed in relation to


measurement tolerances, temperature, pressure, humidity, etc. should be taken into consideration.

Digital combustion management General system overview	W-FM 100	W-FM 200
Single-fuel operation	●	●
Dual-fuel operation	●	●
Controller for intermittent operation	●	●
Controller for continuous operation	●	●
Flame sensor for intermittent operation	ION/QRI/ORB/QRA	ION/QRI/ORB/QRA
Flame sensor for continuous operation	ION/QRI	ION/QRI
Servomotors in electronic compound (max.)	x 4	x 6
Servomotors with stepping motors	●	●
Variable speed drive available		●
O ₂ trim available		●
Gas valve proving	●	●
4-20 mA input signal	Optional	●
Integrated, self-checking PID controller for temperature or pressure	Optional	●
Removable operating unit (max. distance)	100 m	100 m
Fuel consumption meter (switchable)		●
Combustion efficiency display		●
eBUS / Modbus interface	●	●
PC-supported commissioning	●	●

Please enquire regarding connections available for additional functions, e.g. flue gas dampers, oil-shut-off assemblies etc.

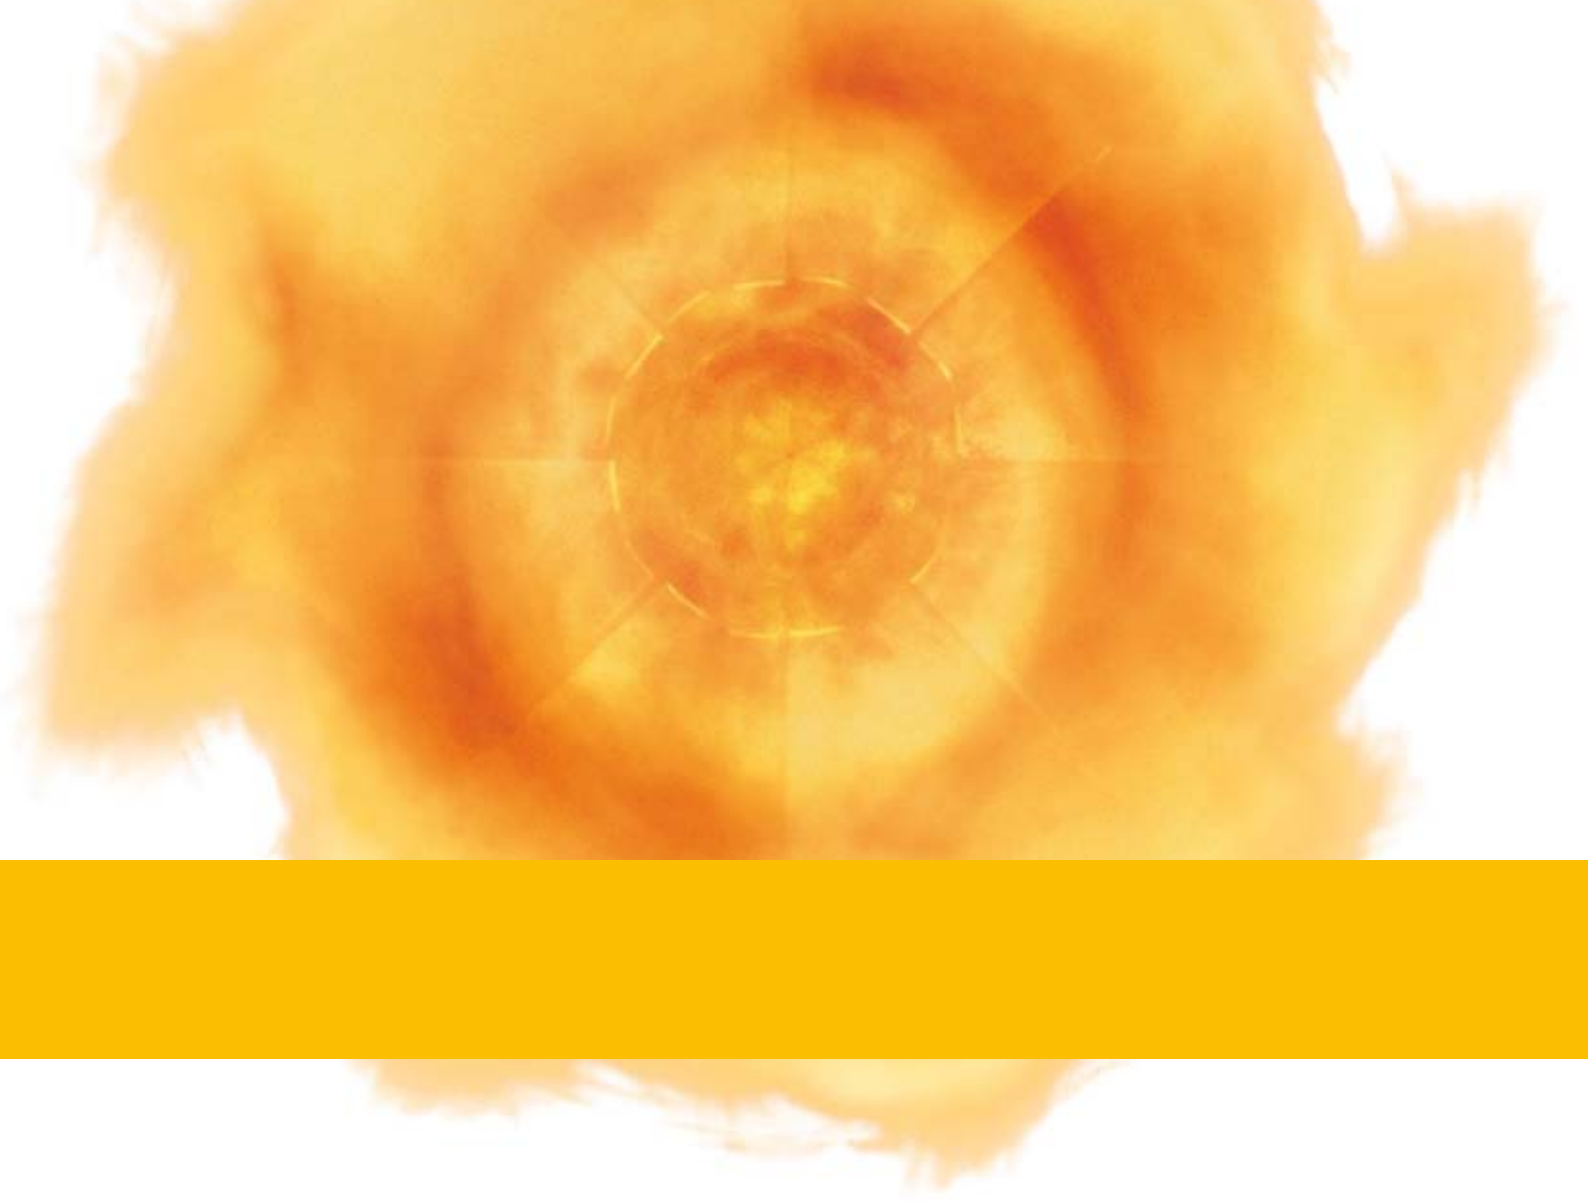

Oil burners

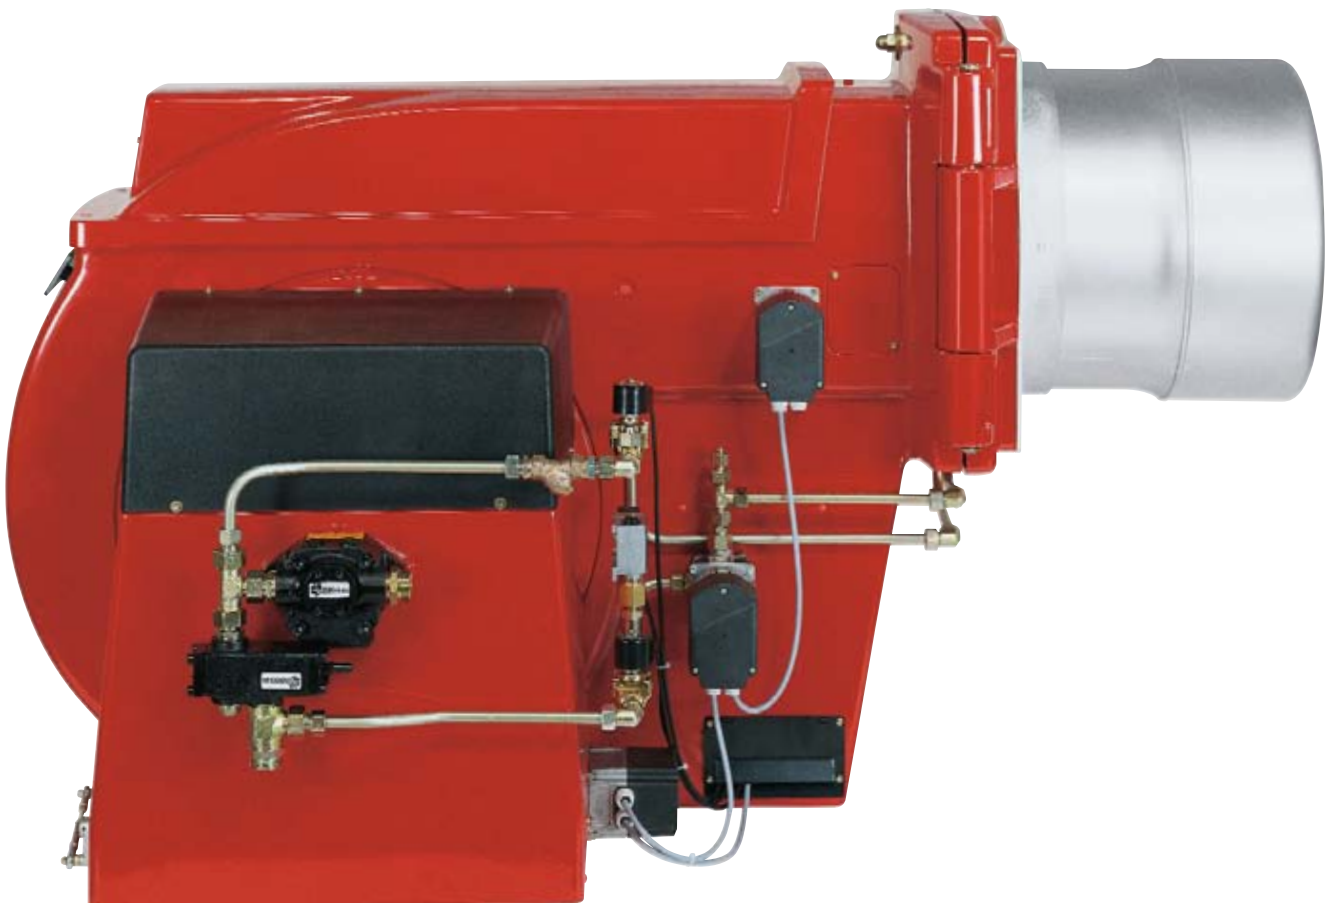

Burner selection

Size 30, standard version

[mbar]

Burner type **MS30Z/2-A**
 Combustion head M30/2 - 190k x 65
 Rating kW 675 - 2440
 Rating kg/h, fuel oil M/S 60 - 217

[kW] 0 500 1000 1500 2000 2500 3000

[mbar]

Burner type **RMS30/2-A**
 Combustion head M30/2 - 190k x 65
 Rating kW 675 - 2440
 Rating kg/h, fuel oil M/S 60 - 217

[kW] 0 500 1000 1500 2000 2500 3000

Fuels
 Fuel oil S ———

Voltages and frequencies:
 The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:
 Insulation Class F, IP 55 protection, IE2 efficiency

Burner type	Version	DIN-CERTCO	Order No.
MS30Z/2-A	—	—	212 303 02
RMS30/2-A	ZM	—	212 305 02

Stated oil throughputs are based on a calorific value of 11.24 kWh/kg for fuel oil S.




Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Burner selection

Size 40, standard version

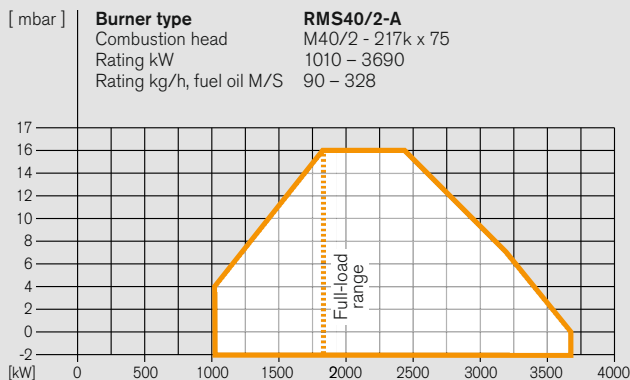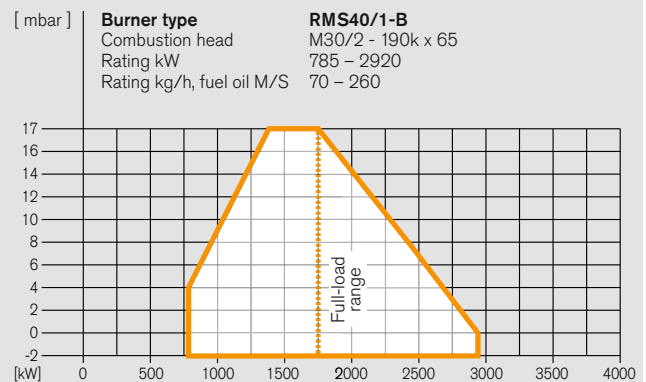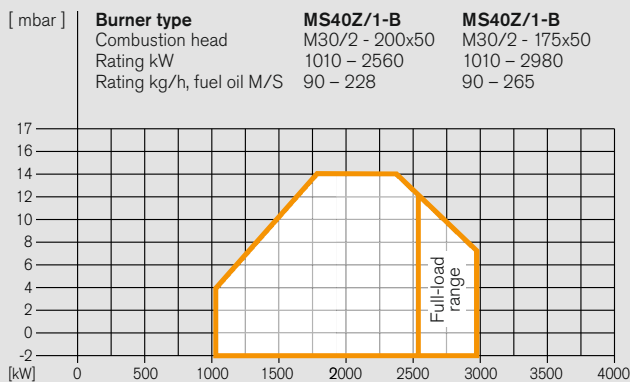

Burner type	Version	DIN-CERTCO	Order No.
MS40Z/1-B	–	–	212 402 00
RMS40/1-B	ZM	–	212 404 00
RMS40/2-A	ZM	–	212 405 02

Stated oil throughputs are based on a calorific value of 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Fuels

Fuel oil S ———

Voltages and frequencies:


The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency




Burner selection

Size 50, standard version

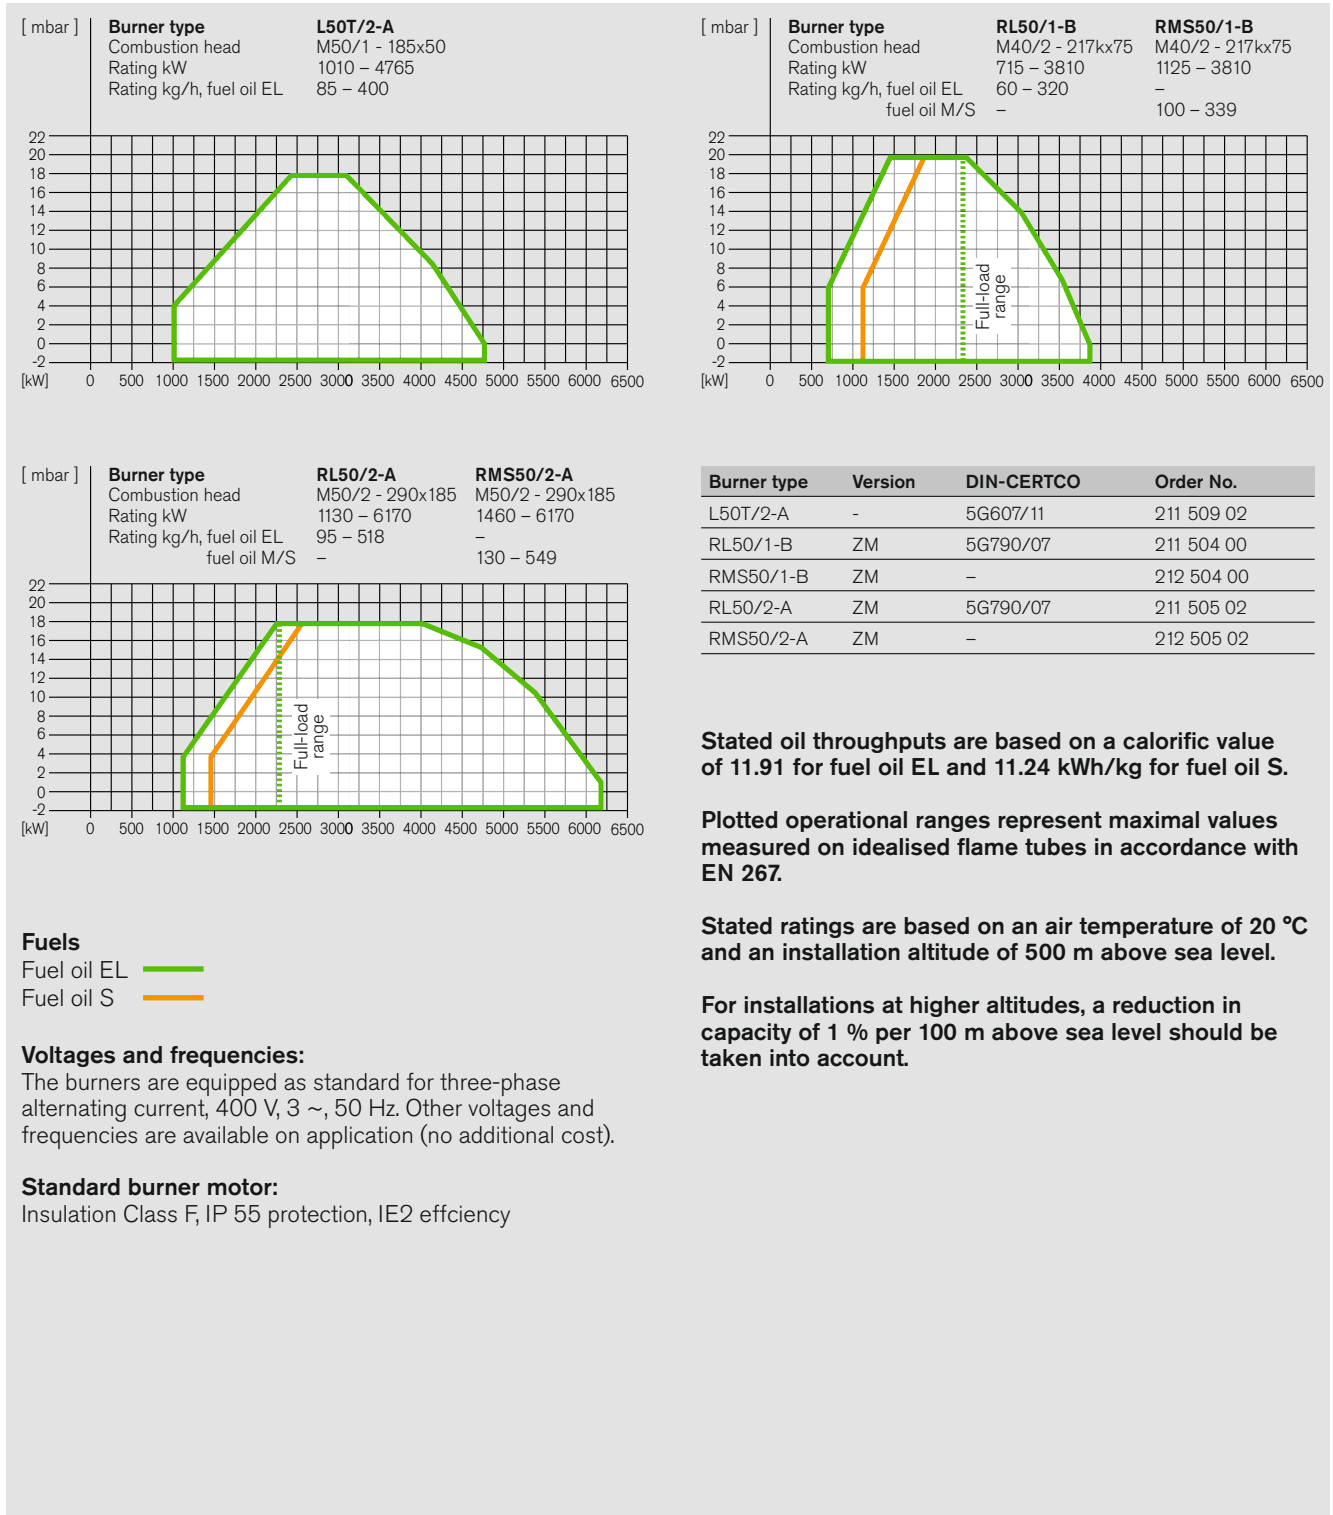

Burner selection

Sizes 60 and 70, standard version

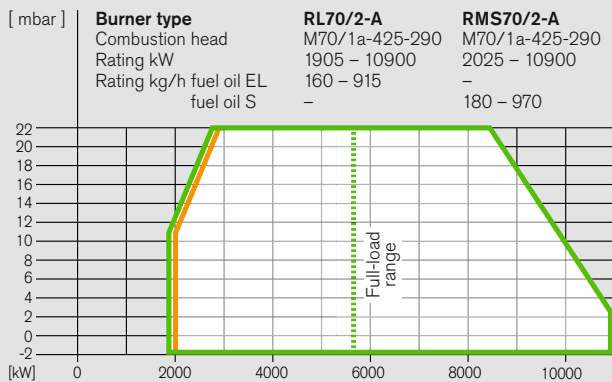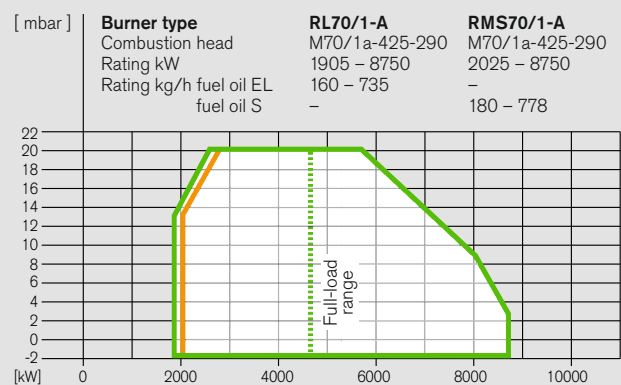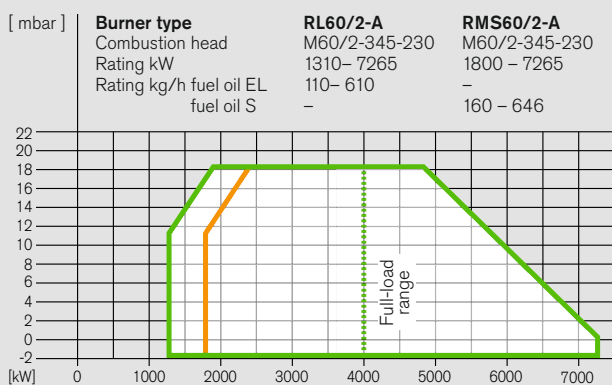

Burner type	Version	DIN-CERTCO	Order No..
RL60/2-A	ZM	5G587/10	211 605 02
RMS60/2-A	ZM	–	212 605 02
RL70/1-A	ZM	5G588/10	211 704 02
RMS70/1-A	ZM	–	212 704 02
RL70/2-A	ZM	5G589/10	211 705 02
RMS70/2-A	ZM	–	212 705 02

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Fuels

Fuel oil EL —
 Fuel oil S —

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Scope of delivery, special equipment

Sizes 30 to 70, standard version

Scope of delivery	MS30	MS40	RMS30	RMS40	RMS50	RMS60	RMS70	L50	RL50	RL60	RL70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, nozzle assembly with oil nozzle(s), combustion manager with control unit, flame sensor, servomotors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●	●	●	●	●	●	●	●	●
W-FM 100 combustion manager	-	-	●	●	●	●	●	●	●	●	●
Air-pressure switch	-	-	-	-	-	●	●	-	-	-	-
Oil-pressure switch in return	●	●	●	●	●	●	●	●	●	●	●
Oil-pressure switch in supply	-	-	-	-	-	●	●	-	-	-	-
Mixing assembly with adjustable regulating sleeve	●	-	-	-	-	-	-	-	-	-	-
Mixing assembly with modulating regulating sleeve	-	-	●	●	●	●	●	-	●	●	●
Oil pump, fitted	●	●	●	●	●	-	-	●	●	●	●
Oil preheater, fitted	●	●	●	●	●	-	-	-	-	-	-
Oil hoses	●	●	●	●	●	●	●	●	●	●	●
3 oil solenoid valves, 1 safety valve, three-stage nozzle head without shut-off device	-	-	-	-	-	-	-	●	-	-	-
Solenoid valve in supply and return, nozzle assembly with shut-off device (solenoid for RL and RMS burners, hydraulically controlled ball valve for MS burners)	●	●	●	●	●	-	-	-	●	●	●
Solenoid valve in supply and return, bypass solenoid valve, nozzle assembly with shut-off device (solenoid)	-	-	-	-	-	●	●	-	-	-	-
Downward-firing version	●	●	●	●	●	●	●	●	●	●	●
Heated oil-side components	●	●	●	●	●	●	●	-	-	-	-
Special equipment											
Air-inlet flange for duct connection	○	○	○	○	○	○	○	○	○	○	○
Heated, stainless-steel oil hoses	○	○	○	○	○	○	○	-	-	-	-
Electromagnetic clutch	-	-	○	○	○	-	-	○	○	○	○
Combustion-head extension	○	○	○	○	○	○	○	○	○	○	○
Medium preheater with fittings	○	○	○	○	○	○	○	-	-	-	-
Variable speed drive	-	-	○	○	○	○	○	○	○	○	○
O ₂ trim	-	-	○	○	○	○	○	○	○	○	○
W-FM supplied loose for mounting in a control panel	-	-	○	○	○	○	○	○	○	○	○
Bus interface	-	-	○	○	○	○	○	○	○	○	○
TRD 24 h/72 h execution	○	○	○	○	○	○	○	○	○	○	○
Multi-language ABE	○	○	○	○	○	○	○	○	○	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 30 and 40, standard version

Technical data				MS30Z/2-A	RMS30/2-A
400 V, 3 ~ burner motor ¹⁾	Type	W-D112/140-2/4K5	W-D112/140-2/4K5		
Nominal rating	kW	4.5	4.5		
Current draw at 400 V	A	9.1	9.1		
Motor pre-fusing (ΥΔ motor start)	A	16	16		
Speed (50 Hz)	rpm	2900	2900		
Fan wheel	Colour / ø	blue / 268 x 104	blue / 268 x 104		
Combustion manager	Type	LAL 2.25	W-FM 100		
Ignition unit	Type	W-ZG02	W-ZG02		
Stepping motor	Air	Type	1055/80	SQM45	
	Fuel	Type	–	SQM45	
	Mixing assembly	Type	–	SQM45	
Integral pump	Type	E7	TA3		
Oil preheater	Type	EV2D	EV2D		
	Oil throughput Heating capacity	kg/h kW	270 13.2	270 13.2	
Oil solenoid valves	230 V, 1/8"	19 W	Type 121 K 2423	–	
	230 V, 1/8"	19 W	Type 122 K 9321	–	
	115 V, 3/8" (supply)	20 W	Type 321 H 2322	321 H 2322	
	115 V, 3/8" (return)	20 W	Type 121 G 2320	121 G 2320	
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	–	–	
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	DSA 46 F001	DSA 46 F001	
Oil hoses (metal, high-pressure hoses on MS, RMS and RGMS burners)	DN / length	20 / 1000 20 / 1300	20 / 1000 20 / 1300		
Burner weight	kg (approx.)	135	140		

Technical data				MS40Z/1-B	RMS40/1-B	RMS40/2-A
400 V, 3 ~ burner motor ¹⁾	Type	W-D112/170-2/5K5	W-D112/170-2/5K5	W-D112/170-2/7K0		
Nominal rating	kW	5.5	5.5	7		
Current draw at 400 V	A	13	13	15		
Motor pre-fusing (ΥΔ motor start)	A	20	20	25		
Speed (50 Hz)	rpm	2930	2930	2930		
Fan wheel	Colour / ø	blue / 295 x 104	blue / 295 x 104	blue / 295 x 104		
Combustion manager	Type	LAL 2.25	W-FM 100	W-FM 100		
Ignition unit	Type	W-ZG02	W-ZG02	W-ZG02		
Stepping motor	Air	Type	SQM10	SQM45		
	Fuel	Type	–	SQM45		
	Mixing assembly	Type	–	SQM45		
Integral pump	Type	E7	TA3	TA3		
Oil preheater	Type	EV2D	EV2D	EV2D ^{2) 3)}		
	Oil throughput Heating capacity	kg/h kW	270 13.2	270 13.2		
Oil solenoid valves	230 V, 1/8"	19 W	Type 121 K 2423	–		
	230 V, 1/4" (safety valve)	20 W	Type –	–		
	230 V, 1/8"	19 W	Type 122K9321	–		
	115 V, 3/8" (supply)	20 W	Type 321 H 2322	321 H 2322		
	115 V, 3/8" (return)	20 W	Type 121 G 2320	121 G 2320		
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	–	–		
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	DSA 46 F001	DSA 46 F001		
Oil hoses (metal, high-pressure hoses on MS, RMS and RGMS burners)	DN / length	20 / 1000 20 / 1300	20 / 1000 20 / 1300	20 / 1000 20 / 1300		
Burner weight	kg (approx.)	159	166	172		

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Burners > 270 kg/h: WEV2.2 oil preheater in lieu of EV2D, see special equipment for additional price.

³⁾ Burners > 300 kg/h: WEV3 oil preheater in lieu of WEV2.2, see special equipment for additional price.

Technical data

Size 50, standard version

Technical data				L50T/2-A	RL50/1-B	RL50/2-A
400 V, 3 ~ burner motor ¹⁾		Type		W-D132/210-2/14K0	W-D132/170-2/9K0	W-D132/210-2/14K0
Nominal rating		kW		14	9	14
Current draw at 400 V		A		28	18	28
Motor pre-fusing (ΥΔ motor start)		A		50	35	50
Speed (50 Hz)		rpm		2920	2920	2920
Fan wheel		Colour / ø		blue / 345 x 104,5	blue / 345 x 104,5	blue / 345 x 104,5
Combustion manager		Type		W-FM 100	W-FM 100	W-FM 100
Ignition unit		Type		W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type		SQM45	SQM45	SQM45
	Fuel	Type		–	SQM45	SQM45
	Mixing assembly	Type		–	SQM45	SQM45
Integral pump		Type		TA2C	TA4C	T2C
Oil preheater		Type		–	–	–
	Oil throughput	kg/h		–	–	–
	Heating capacity	kW		–	–	–
Oil solenoid valves	230 V, 1/8"	19 W	Type	121 K 2423 (x 3)	–	–
	230 V, 1/4" (safety valve)	20 W	Type	121 K 6220	–	–
	115 V, 3/8" (supply)	20 W	Type	–	321 H 2322	321 H 2322
	115 V, 3/8" (return)	20 W	Type	–	121 G 2320	121 G 2320
Oil-pressure switch	1 – 10 bar	(return, fuel oil EL - 5 bar)	Type	–	DSA 46 F001	DSA 46 F001
	1 – 10 bar	(return, fuel oil S - 7 bar)	Type	–	–	–
Oil hoses		DN / length		20 / 1300 (x 2)	25 / 1300 (x 2)	25 / 1300 (x 2)
Burner weight		kg (approx.)		200	208	210

Technical data				RMS50/1-B	RMS50/2-A
400 V, 3 ~ burner motor ¹⁾		Type		W-D132/170-2/9K0	W-D132/210-2/14K0
Nominal rating		kW		9	14
Current draw at 400 V		A		18	28
Motor pre-fusing (ΥΔ motor start)		A		35	50
Speed (50 Hz)		rpm		2920	2920
Fan wheel		Colour / ø		blue / 345 x 104,5	blue / 345 x 104,5
Combustion manager		Type		W-FM 100	W-FM 100
Ignition unit		Type		W-ZG02	W-ZG02
Stepping motor	Air	Type		SQM45	SQM45
	Fuel	Type		SQM45	SQM45
	Mixing assembly	Type		SQM45	SQM45
Integral pump		Type		TA4C	T2C
Oil preheater		Type		WEV2.2/01 ²⁾	WEV3/01
	Oil throughput	kg/h		300	500
	Heating capacity	kW		13,8	22,4
Oil solenoid valves	115 V, 3/8" (supply)	20 W	Type	321 H 2322	321 H 2322
	115 V, 3/8" (return)	20 W	Type	121 G 2320	121 G 2320
Oil-pressure switch	1 – 10 bar	(return, fuel oil EL - 5 bar)	Type	–	–
	1 – 10 bar	(return, fuel oil S - 7 bar)	Type	DSA 46 F001	DSA 46 F001
Oil hoses (metal, high-pressure hoses on MS, RMS and RGMS burners)		DN / length		25 / 1150	25 / 1150
				25 / 1500	25 / 1500
Burner weight		kg (approx.)		248	250

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Burners > 300 kg/h: WEV3 oil preheater in lieu of WEV2.2, see special equipment for additional price.

Technical data

Sizes 60 and 70, standard version

Technical data			RL60/2-A	RMS60/2-A
400 V, 3 ~ burner motor ¹⁾		Type	W-D132/210-2/14K0	W-D132/210-2/14K0
Nominal rating		kW	14	14
Current draw at 400 V		A	28	28
Motor pre-fusing (ΥΔ motor start)		A	50	50
Speed (50 Hz)		rpm	2920	2920
Fan wheel		Colour / ø	blue / 515 x 120	blue / 515 x 120
Combustion manager		Type	W-FM 100	W-FM 100
Ignition unit		Type	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM45	SQM45
	Fuel	Type	SQM45	SQM45
	Mixing head	Type	SQM45	SQM45
Integral pump		Type	T2C	–
Oil solenoid valves	115 V, 3/8" (supply)	20 W Type	321 H 2322	321 H 2322
	115 V, 3/8" (return)	20 W Type	121 G 2320	121 G 2320
	230 V, 3/8" (bypass)	19 W Type	–	322 H 7306
Oil-pressure switch	3 – 25 bar (supply - 18 bar)	Type	–	DSA 58 F 001
	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F 001	–
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–	DSA 46 F 001
Oil hoses (metal, high-pressure hoses on MS, RMS and RGMS burners)		DN / length	25 / 1300 (x 2)	16 / 1150
			–	16 / 1500
Burner weight		kg (approx.)	250	210 ²⁾


Technical data			RL70/1-A	RL70/2-A	RMS70/1-A	RMS70/2-A
400 V, 3 ~ burner motor ¹⁾		Type	W-D160/215-2/14K0	W-D160/240-2/22K0	W-D160/215-2/14K0	W-D160/240-2/22K0
Nominal rating		kW	14	22	14	22
Current draw at 400 V		A	26	43	26	43
Motor pre-fusing (ΥΔ motor start)		A	50	63	50	63
Speed (50 Hz)		rpm	2940	2940	2940	2940
Fan wheel		Colour / ø	green / 530 x 120	blue / 590 x 160	green / 530 x 120	blue / 590 x 160
Combustion manager		Type	W-FM 100	W-FM 100	W-FM 100	W-FM 100
Ignition unit		Type	W-ZG02	W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM45	SQM45	SQM45	SQM45
	Fuel	Type	SQM45	SQM45	SQM45	SQM45
	Mixing head	Type	SQM45	SQM45	SQM45	SQM45
Integral pump		Type	T2C (up to 600 kg/h) T3C (from 600 kg/h)	T2C (up to 600 kg/h) T3C (from 600 kg/h)	–	–
Oil solenoid valves	115 V, 1/2" (supply)	20 W Type	321 H 2522	321 H 2522	321 H 2522	321 H 2522
	115 V, 1/2" (return)	20 W Type	121 G 2520	121 G 2520	121 G 2520	121 G 2520
	230 V, 3/8" (bypass)	19 W Type	–	–	322 H 7306	322 H 7306
Oil-pressure switch	3 – 25 bar (supply - 18 bar)	Type	–	–	DSA 58 F 001	DSA 58 F 001
	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F 001	DSA 46 F 001	–	–
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–	–	DSA 46 F 001	DSA 46 F 001
Oil hoses (metal, high-pressure hoses on MS, RMS and RGMS burners)		DN / length	25 / 1300 (x 2)	25 / 1300 (x 2)	20 / 1150	20 / 1150
			–	–	20/1500	20 / 1500
Burner weight		kg (approx.)	350	350	310 ²⁾	310 ²⁾

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Weight excluding pump and preheater stations.




Gas burners

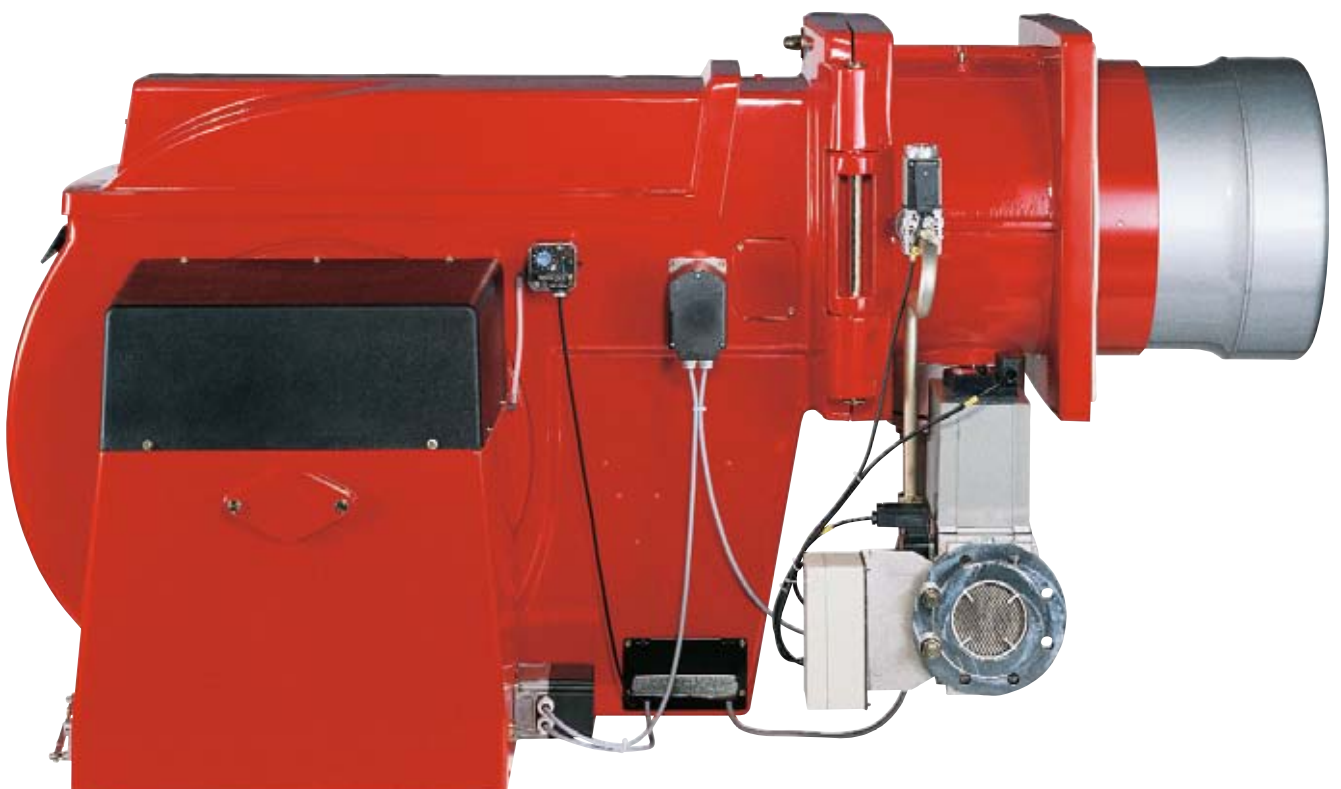



Burner selection

Sizes 50 to 70, version NR

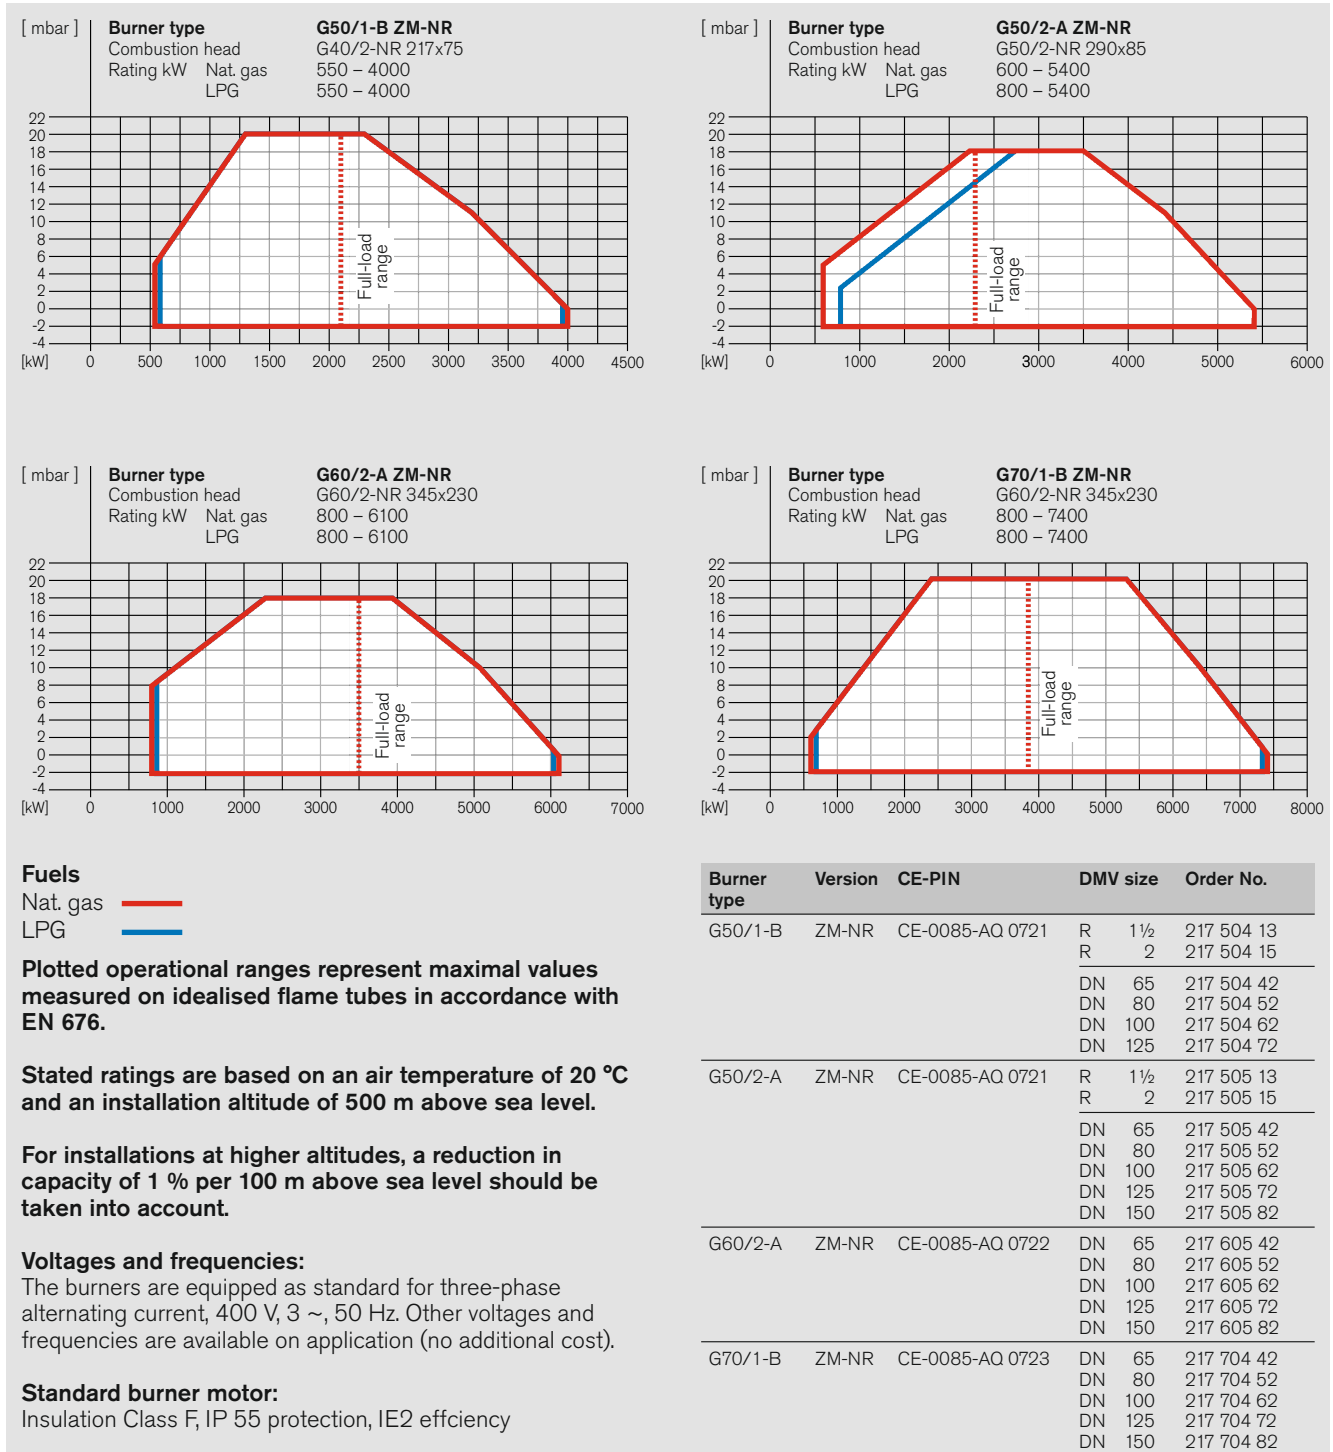

Burner selection

Size 70, version NR

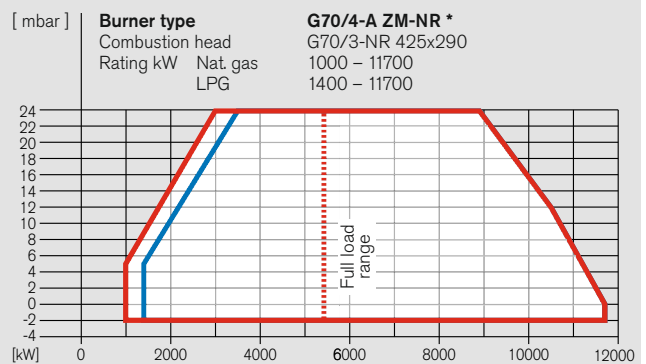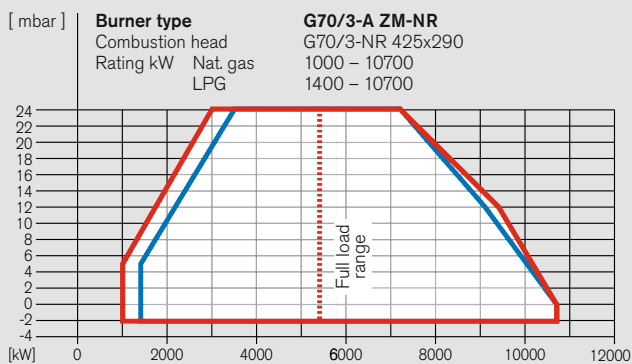

Fuels

Nat. gas —
LPG —

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Burner type	Version	CE-PIN	DMV size	Order No.
G70/3-A	ZM-NR	CE-0085-AQ 0723	DN 65	217 714 14
			DN 80	217 714 15
			DN 100	217 714 16
			DN 125	217 714 17
			DN 150	217 714 18
G70/4-A *	ZM-NR	CE-0085-AQ 0723	DN 65	217 734 14
			DN 80	217 734 15
			DN 100	217 734 16
			DN 125	217 734 17
			DN 150	217 734 18

* Equipped with W-FM 200 and VSD as standard

Gas valve train sizing

Size 50, version NR

Type 50/1-B, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)						High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)					
	Nominal valve-train diameter						Nominal valve-train diameter					
	1½"	2"	65	80	100	125	1½"	2"	65	80	100	125
	Nominal diameter of gas butterfly						Nominal diameter of gas butterfly					
	65	65	65	65	65	65	65	65	65	65	65	65

Natural gas E (N) $H_i = 10.35$ kWh/mn³; $d = 0.606$; $W_i = 13.295$ kWh/mn³

2100	164	59	33	22	17	15	87	30	18	14	12	11
2400	214	77	42	29	21	19	113	39	24	19	16	15
2700	270	96	52	35	26	23	-	49	30	24	20	19
3000	-	118	64	43	32	28	-	61	37	29	24	23
3300	-	143	77	51	38	33	-	73	44	36	30	28
3600	-	169	91	60	44	39	-	87	52	42	35	33
4000	-	208	111	74	53	47	-	107	65	52	43	40
4000	-	208	111	74	53	47	-	107	65	52	43	40

Natural gas LL (N) $H_i = 8.83$ kWh/mn³; $d = 0.641$; $W_i = 11.029$ kWh/mn³

2100	236	84	45	30	22	19	125	42	25	20	16	15
2400	-	109	58	39	28	25	-	55	33	26	21	20
2700	-	137	73	48	34	30	-	69	41	32	26	25
3000	-	168	89	59	42	37	-	85	51	40	33	31
3300	-	203	107	70	50	44	-	103	61	48	40	37
3600	-	241	127	83	59	51	-	123	72	57	47	44
4000	-	297	156	102	72	63	-	-	89	71	58	54
4000	-	297	156	102	72	63	-	-	89	71	58	54

LPG (F) $H_i = 25.89$ kWh/mn³; $d = 1.555$; $W_i = 20.762$ kWh/mn³

2100	71	28	17	13	10	10	38	14	9	8	7	7
2400	92	36	21	16	13	12	49	19	12	11	9	9
2700	116	44	26	19	16	14	62	24	16	13	11	11
3000	142	55	32	24	19	17	77	29	20	17	14	14
3300	172	65	38	28	22	21	93	35	24	20	18	17
3600	204	77	45	33	26	24	111	42	28	24	21	20
4000	251	94	55	39	31	28	136	52	34	29	25	24
4000	251	94	55	39	31	28	136	52	34	29	25	24

Type 50/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)						High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)							
	Nominal valve-train diameter						Nominal valve-train diameter							
	1½"	2"	65	80	100	125	150	1½"	2"	65	80	100	125	150
	Nominal diameter of gas butterfly						Nominal diameter of gas butterfly							
	80	80	80	80	80	80	80	80	80	80	80	80	80	80

Natural gas E (N) $H_i = 10.35$ kWh/mn³; $d = 0.606$; $W_i = 13.295$ kWh/mn³

2300	210	84	52	40	33	31	30	118	49	35	31	28	27	27
2800	-	113	66	47	38	34	33	-	63	42	35	31	30	29
3300	-	147	82	56	42	38	36	-	78	49	40	34	33	32
3800	-	193	105	71	53	47	44	-	101	63	51	43	41	40
4300	-	247	135	92	68	61	57	-	130	81	66	56	53	52
4800	-	-	167	113	84	74	70	-	-	101	82	69	66	65
5400	-	-	208	140	103	91	85	-	-	125	101	85	81	79
5400	-	-	208	140	103	91	85	-	-	125	101	85	81	79

Natural gas LL (N) $H_i = 8.83$ kWh/mn³; $d = 0.641$; $W_i = 11.029$ kWh/mn³

2300	-	120	74	56	46	43	41	-	71	50	44	40	38	38
2800	-	162	93	67	52	48	46	-	90	59	50	44	42	42
3300	-	212	116	79	59	53	50	-	112	70	57	49	46	45
3800	-	275	148	99	72	64	60	-	-	88	71	59	56	55
4300	-	-	187	124	90	79	74	-	-	110	89	74	70	68
4800	-	-	229	151	108	95	89	-	-	134	107	89	84	82
5400	-	-	284	185	131	114	106	-	-	-	130	107	101	98
5400	-	-	284	185	131	114	106	-	-	-	130	107	101	98

LPG (F) $H_i = 25.89$ kWh/mn³; $d = 1.555$; $W_i = 20.762$ kWh/mn³

2300	86	35	22	17	14	13	13	47	19	13	11	10	10	10
2800	129	52	33	25	21	20	19	71	30	21	19	17	16	16
3300	179	72	45	35	29	27	27	100	42	31	27	24	24	24
3800	237	96	60	46	38	36	35	133	57	41	36	33	32	32
4300	-	121	76	58	48	45	44	-	72	52	46	42	41	40
4800	-	150	93	71	59	55	53	-	90	64	57	52	50	50
5400	-	188	116	88	73	68	66	-	112	81	71	64	63	62
5400	-	188	116	88	73	68	66	-	112	81	71	64	63	62

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Gas burners size 60, version NR

Type 60/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/m ³ ; $d = 0.606$; $W_i = 13.295$ kWh/m ³	
4000	197 101 63 43 36 33
4300	228 116 73 49 42 39
4500	250 127 80 54 46 42
4800	284 144 90 61 52 47
5000	- 156 97 66 56 51
5300	- 174 109 73 62 56
5600	- 194 120 80 68 62
6100	- 227 140 93 78 71

Natural gas LL (N) $H_i = 8.83$ kWh/m ³ ; $d = 0.641$; $W_i = 11.029$ kWh/m ³	
4000	278 138 83 54 44 40
4300	- 160 97 62 52 47
4500	- 175 106 68 57 51
4800	- 198 120 77 64 58
5000	- 215 130 84 69 62
5300	- 241 145 93 77 69
5600	- 267 160 103 84 76
6100	- 188 119 98 87

LPG (F) $H_i = 25.89$ kWh/m ³ ; $d = 1.555$; $W_i = 20.762$ kWh/m ³	
4000	95 55 39 31 28 27
4300	109 63 45 36 33 31
4500	119 69 49 39 36 34
4800	135 78 56 44 40 38
5000	146 84 60 47 43 41
5300	164 94 67 52 48 45
5600	182 104 74 57 52 50
6100	214 122 86 67 60 58

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 70, version NR

Type 70/1-B, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	100 100 100 100 100	100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
3900	189 97 62 42 36 33
4400	239 122 77 52 44 41
4900	295 150 93 63 53 49
5400	- 180 112 75 63 57
5900	- 213 132 87 73 67
6400	- 249 153 101 85 77
6900	- 288 177 116 97 88
7400	- - 202 132 110 100

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
3900	268 134 82 54 46 41
4400	- 170 104 68 57 52
4900	- 209 127 83 69 63
5400	- 253 153 100 83 75
5900	- - 182 117 97 88
6400	- - 212 137 113 102
6900	- - 245 157 129 116
7400	- - 280 179 147 132

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
3900	82 45 30 22 20 18
4400	105 57 39 29 25 24
4900	130 71 48 35 31 30
5400	158 86 58 42 38 35
5900	188 101 68 50 44 41
6400	220 118 79 58 51 48
6900	254 136 90 66 58 54
7400	291 155 103 74 65 61

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Type 70/3-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	100 100 100 100 100	100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
5300	146 80 45 33 28
6000	187 102 57 42 35
7000	253 138 76 56 47
8000	- 179 98 72 60
9000	- 226 123 90 75
10000	- 278 151 111 92
10700	- - 172 126 105

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
5300	210 115 63 46 39
6000	269 146 79 58 49
7000	- 197 107 78 65
8000	- 256 138 101 83
9000	- - 174 127 104
10000	- - 214 155 128
10700	- - 244 177 146

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
5300	69 42 27 23 20
6000	84 49 31 25 22
7000	110 63 37 29 26
8000	141 80 46 36 31
9000	177 99 57 44 37
10000	218 122 70 53 46
10700	250 140 80 61 52

Type 70/4-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	100 100 100 100 100	100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
7000	253 138 76 56 47
8000	- 179 98 72 60
9000	- 226 123 90 75
10000	- 278 151 111 92
11000	- - 182 133 110
11700	- - 205 150 124

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
7000	- 197 107 78 65
8000	- 256 138 101 83
9000	- - 174 127 104
10000	- - 214 155 128
11000	- - 258 187 154
11700	- - 291 211 173

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
7000	110 63 37 29 26
8000	141 80 46 36 31
9000	177 99 57 44 37
10000	218 122 70 53 46
11000	264 148 85 65 55
11700	299 167 96 74 63

Scope of delivery, special equipment Sizes 50 to 70, version NR

Scope of delivery	G50	G60	G70 / 70/4	
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, combustion manager with control unit, flame sensor, servomotors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●	●
W-FM 100 combustion manager	●	●	●	–
W-FM 200 combustion manager	–	–	–	●
Double gas solenoid valve (Class A)	●	●	●	●
Gas butterfly valve	●	●	●	●
Pilot-line solenoid valve (Class A)	●	●	●	●
Air-pressure switch	●	●	●	●
Low-gas-pressure switch	●	●	●	●
Mixing assembly with modulating regulating sleeve	●	●	●	●
Stepping motor for compound regulation of gas and air with W-FM 100	●	●	●	●
Stepping motor for air regulator	●	●	●	●
Stepping motor for gas butterfly valve	●	●	●	●
Stepping motor for regulating sleeve	●	●	●	●
Special equipment				
Downward-firing version	○	○	○	○
Air-inlet flange for duct connection	○	○	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post-purge	○	○	○	○
Combustion-head extension	○	○	○	○
Integral capacity controller for W-FM 100	○	○	○	–
Variable speed drive	○	○	○	●
O ₂ trim	○	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○	○
Bus interface	○	○	○	○
High-gas-pressure switch	○	○	○	○
Multi-language ABE	○	○	○	○
Offset gas butterfly valve and DMV	○	○	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 50 to 70, version NR

Technical data		G50/1-B			G50/2-A		G60/2-A		
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0			W-D132/210-2/14K0		W-D132/210-2/14K0		
Nominal rating	kW	9			14		14		
Current draw at 400 V	A	18			28		28		
Motor pre-fusing (YΔ motor start)	A	35			50		50		
Speed (50 Hz)	rpm	2920			2920		2920		
Fan wheel	colour	blue			blue		blue		
	ø	345 x 100			345 x 100		515 x 120		
Combustion manager	Type	W-FM 100			W-FM 100		W-FM 100		
Ignition unit	Type	W-ZG02			W-ZG02		W-ZG02		
Stepping motor	Air	Type	SQM45			SQM45		SQM48	
	Mixing assembly	Type	SQM45			SQM45		SQM45	
	Fuel	Type	SQM45			SQM45		SQM45	
Burner weight	kg (approx.)	185			185		275		
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	





Technical data		G70/1-B			G70/3-A		G70/4-A		
400 V, 3 ~ burner motor ¹⁾	Type	W-D160/215-2/14K0			W-D160/240-2/22K0		W-D160/240-2/28K0		
Nominal rating	kW	18			22		28		
Current draw at 380 V (400 V)	A	38			43		53		
Motor pre-fusing (YΔ motor start)	A	63			63		*		
Speed (50/55 Hz)	rpm	2940			2940		3220		
Frequency convertor with braking resistor	Type	-			-		FC301 P22K IP 20		
Fan wheel	Colour	blue			blue		blue		
	ø	590 x 160			590 x 160		590 x 160		
Combustion manager	Type	W-FM 100			W-FM 100		W-FM 200		
Ignition unit	Type	W-ZG02			W-ZG02		W-ZG02		
Stepping motor	Air	Type	SQM48			SQM48		SQM48	
	Mixing assembly	Type	SQM45			SQM48		SQM48	
	Fuel	Type	SQM45			SQM45		SQM45	
Burner weight	kg (approx.)	390			420		420		
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

* 55 Hz operation with frequency convertor only.

Burner selection

Sizes 50 and 70, version 1LN

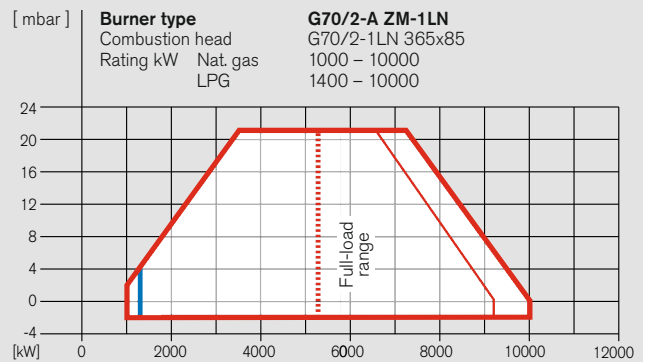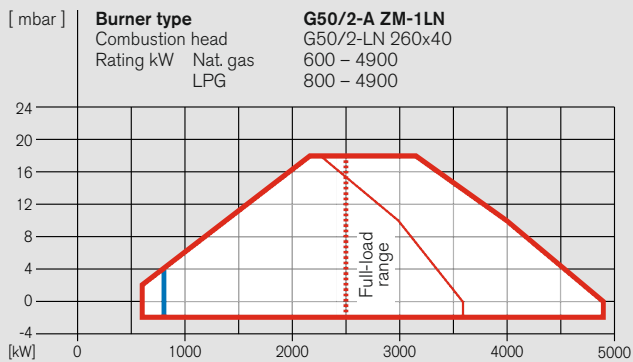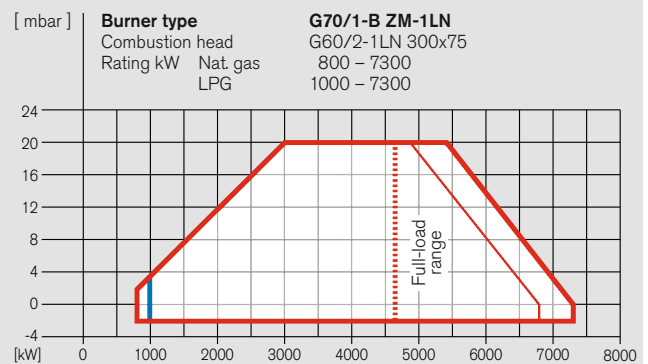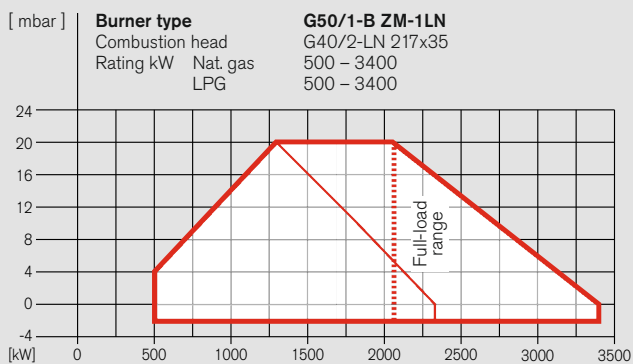

Burner type	Version	CE-PIN	DMV size	Order No.
G50/1-B	ZM-1LN	CE-0085AQ 0721	R 1½	217 504 16
			R 2	217 504 17
			DN 65	217 504 45
			DN 80	217 504 55
			DN 100	217 504 65
G50/2-A	ZM-1LN	CE-0085AQ 0721	R 1½	217 505 16
			R 2	217 505 17
			DN 65	217 505 45
			DN 80	217 505 55
			DN 100	217 505 65
G70/1-B	ZM-1LN	CE-0085AQ 0723	DN 65	217 704 45
			DN 80	217 704 55
			DN 100	217 704 65
			DN 125	217 704 75
			DN 150	217 704 85
G70/2-A	ZM-1LN	CE-0085AQ 0723	DN 65	217 705 45
			DN 80	217 705 55
			DN 100	217 705 65
			DN 125	217 705 75
			DN 150	217 705 85

Fuels – Rating with combustion head

	open	closed
Nat. gas		
LPG		

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Gas valve train sizing

Size 50, version 1LN

Type 50/1-B, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)						High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)					
	Nominal valve-train diameter						Nominal valve-train diameter					
	1½"	2"	65	80	100	125	1½"	2"	65	80	100	125
	Nominal diameter of gas butterfly						Nominal diameter of gas butterfly					
	65	65	65	65	65	65	65	65	65	65	65	65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2100	172	67	40	30	24	23	94	37	26	22	20	19
2300	205	79	47	34	28	26	112	44	30	25	22	22
2500	241	92	54	39	31	29	132	51	34	29	26	25
2700	280	106	62	45	36	33	-	59	40	34	30	29
2900	-	122	71	51	41	37	-	68	45	39	34	33
3100	-	139	81	58	46	42	-	77	52	44	39	37
3400	-	167	97	70	55	50	-	93	62	53	47	45

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2100	246	93	54	39	31	29	134	51	34	29	25	24
2300	293	110	63	45	35	32	-	60	39	33	29	28
2500	-	128	73	52	40	36	-	69	45	38	33	32
2700	-	148	83	59	45	41	-	80	52	43	37	36
2900	-	169	95	66	51	46	-	91	59	49	42	40
3100	-	192	107	74	57	51	-	103	66	55	47	45
3400	-	229	127	88	67	60	-	123	78	65	56	53

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³												
2100	82	39	28	24	22	21	49	26	21	19	18	18
2300	97	46	32	27	25	24	58	30	24	22	21	21
2500	114	53	37	31	28	27	67	34	28	25	24	24
2700	132	60	42	35	32	30	78	40	32	29	28	27
2900	151	69	48	40	36	34	90	45	36	33	32	31
3100	172	79	55	45	40	39	103	52	41	38	36	35
3400	207	94	66	54	48	46	124	63	50	46	43	43

Type 50/2-A, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)						High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)					
	Nominal valve-train diameter						Nominal valve-train diameter					
	1½"	2"	65	80	100	125 150	1½"	2"	65	80	100	125 150
	Nominal diameter of gas butterfly						Nominal diameter of gas butterfly					
	65	65	65	65	65	65	65	65	65	65	65	65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2500	239	90	52	37	30	27 26	130	49	32	27	24	23 23
2800	-	113	66	48	38	34 33	-	63	42	35	31	30 30
3100	-	138	80	57	45	41 40	-	77	51	43	38	36 36
3400	-	164	94	67	53	48 46	-	91	60	51	44	42 42
3800	-	201	114	80	62	56 53	-	110	71	60	52	50 49
4200	-	240	134	92	70	63 59	-	129	82	68	58	56 55
4600	-	282	154	104	77	69 65	-	-	93	76	64	61 60
4900	-	-	169	113	83	73 68	-	-	100	81	68	64 63

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2500	-	125	70	49	37	34 32	-	67	43	35	30	29 28
2800	-	157	88	62	47	43 40	-	85	54	45	39	37 37
3100	-	192	107	74	57	51 48	-	103	66	55	47	45 44
3400	-	229	127	87	66	59 56	-	123	78	64	55	53 52
3800	-	281	154	105	79	70 66	-	-	94	77	65	62 61
4200	-	-	183	123	91	81 76	-	-	110	89	75	71 70
4600	-	-	214	142	103	90 85	-	-	127	102	85	80 78
4900	-	-	238	156	112	98 91	-	-	139	111	91	86 84

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³												
2500	109	48	33	27	24	23 22	63	30	23	21	20	19 19
2800	143	66	47	39	35	34 33	86	44	36	33	31	31 31
3100	178	84	60	51	46	44 44	108	57	47	44	41	41 41
3400	214	101	73	61	55	54 53	131	70	57	53	51	50 50
3800	265	124	88	74	66	64 63	-	85	69	64	61	60 60
4200	-	145	101	84	75	72 71	-	98	79	73	69	68 67
4600	-	166	113	93	82	78 77	-	110	87	80	75	73 73
4900	-	181	121	98	85	81 80	-	117	91	83	78	76 76

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 70, version 1LN

Type 70/1-B, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn³; $d = 0.606$; $W_i = 13.295$ kWh/mn³

4600	135	85	58	50	46	74	57	45	42	41
5000	156	97	66	56	51	85	64	51	47	45
5400	180	111	75	63	57	97	73	57	53	51
5800	206	127	84	71	64	111	83	65	60	58
6200	234	144	95	80	73	126	94	73	67	65
6600	265	163	107	90	82	142	107	83	76	74
7000	298	183	121	101	92	160	120	93	86	83
7300	-	199	131	110	100	174	131	102	94	91

Natural gas LL (N) $H_i = 8.83$ kWh/mn³; $d = 0.641$; $W_i = 11.029$ kWh/mn³

4600	188	116	77	65	59	101	76	59	54	53
5000	219	134	88	73	66	116	87	66	61	59
5400	253	153	100	83	75	133	99	76	69	67
5800	290	175	113	94	84	152	113	86	79	76
6200	-	199	128	106	96	174	128	97	89	86
6600	-	225	145	120	108	197	145	110	101	98
7000	-	254	163	135	121	-	164	125	114	110
7300	-	276	178	147	132	-	179	136	124	120

LPG (F) $H_i = 25.89$ kWh/mn³; $d = 1.555$; $W_i = 20.762$ kWh/mn³

4600	85	64	53	50	48	58	51	46	45	45
5000	97	73	60	56	54	66	58	52	51	50
5400	111	83	68	63	61	76	66	59	58	57
5800	127	94	77	71	69	86	75	67	65	64
6200	144	107	87	80	77	98	85	76	74	73
6600	162	120	97	90	87	110	96	86	83	82
7000	182	135	109	101	97	124	108	96	93	92
7300	198	146	119	110	106	135	117	105	102	101

Type 70/2-A, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn³; $d = 0.606$; $W_i = 13.295$ kWh/mn³

5300	153	87	51	40	34	72	50	34	30	28
5900	188	106	62	48	41	89	61	42	36	35
6500	227	128	74	57	49	107	73	50	44	41
7100	269	151	87	67	58	128	87	59	52	49
7700	-	177	102	78	67	150	102	69	60	57
8300	-	205	118	90	77	174	118	80	70	66
8900	-	235	135	103	88	200	135	92	80	76
9500	-	267	153	116	99	-	154	104	91	86
10000	-	296	169	129	110	-	171	115	100	95

Natural gas LL (N) $H_i = 8.83$ kWh/mn³; $d = 0.641$; $W_i = 11.029$ kWh/mn³

5300	215	119	67	51	43	100	67	44	38	36
5900	266	148	84	63	54	124	83	55	48	45
6500	-	179	101	77	65	151	101	67	58	55
7100	-	213	120	91	77	180	121	80	70	66
7700	-	250	141	106	90	-	142	94	82	77
8300	-	290	163	123	104	-	165	109	94	89
8900	-	-	186	140	119	-	189	125	108	102
9500	-	-	211	159	134	-	-	142	122	115
10000	-	-	233	175	147	-	-	157	135	127

LPG (F) $H_i = 25.89$ kWh/mn³; $d = 1.555$; $W_i = 20.762$ kWh/mn³

5300	75	48	33	29	27	41	31	25	23	23
5900	92	59	41	35	32	50	39	31	29	28
6500	111	71	49	42	39	61	47	37	35	34
7100	132	84	58	49	45	73	56	44	41	40
7700	155	98	67	57	53	85	66	52	48	47
8300	179	113	77	66	60	99	76	60	56	54
8900	205	129	88	75	69	113	87	69	64	62
9500	233	146	99	84	77	128	98	78	72	70
10000	257	161	109	93	85	142	109	86	80	78

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery, special equipment

Sizes 50 and 70, version 1LN

Scope of delivery	G50	G70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, combustion manager with control unit, flame sensor, stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●
W-FM 100 combustion manager	●	●
Double gas solenoid valve (Class A)	●	●
Gas butterfly valve	●	●
Pilot line	●	●
Air-pressure switch	●	●
Low-gas-pressure switch	●	●
Mixing assembly with adjustable regulating sleeve	●	●
Stepping motor for compound regulation of gas and air with W-FM 100	●	●
Stepping motor for air regulator	●	●
Stepping motor for gas butterfly valve	●	●
Special equipment		
Downward-firing version	○	○
Air-inlet flange for duct connection	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post purge	○	○
Combustion-head extension	○	○
Integral capacity controller for W-FM 100	○	○
Variable speed drive	○	○
O ₂ trim	○	○
W-FM supplied loose for mounting in a control panel	○	○
Bus interface	○	○
High-gas-pressure switch	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data


Sizes 50 and 70, version 1LN

Technical data		G50/1-B		G50/2-A		G70/1-B		G70/2-A		
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0		W-D132/210-2/14K0		W-D160/240-2/18K0		W-D160/240-2/22K0		
Nominal rating	kW	9		14		18		22		
Current draw at 400 V	A	18		28		34,5		43		
Motor pre-fusing (YΔ motor start)	A	35		50		63		63		
Speed (50 Hz)	rpm	2920		2920		2950		2940		
Fan wheel	Colour	blue		blue		blue		blue		
	ø	345 x 104		345 x 104		590 x 160		590 x 160		
Combustion manager	Type	W-FM 100		W-FM 100		W-FM 100		W-FM 100		
Ignition unit	Type	W-ZG02		W-ZG02		W-ZG02		W-ZG02		
Stepping motor	Air	Type	SQM45		SQM45		SQM48		SQM48	
	Fuel	Type	SQM45		SQM45		SQM45		SQM45	
Burner weight	kg (approx.)	185		185		390		390		
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150		
	kg (approx.)	23	25	65	80	130	220	240		

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

Burner selection

Size 50, version LN

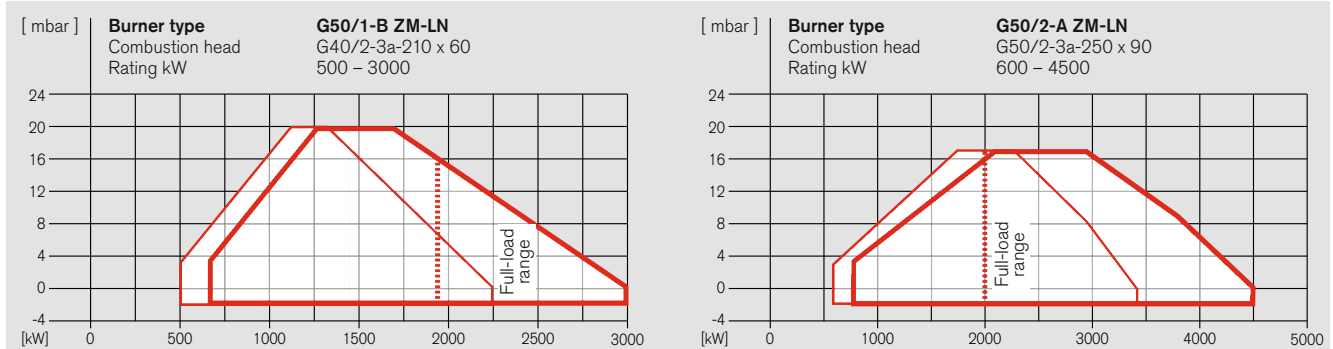

Fuels – Rating with combustion head

Nat. gas **open** **closed**

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Burner type	Version	CE-PIN	DMV size	Order No.
G50/1-B	ZM-LN	CE-0085AQ 0721	R 1½	217 504 18
			R 2	217 504 19
			DN 65	217 504 43
			DN 80	217 504 53
			DN 100	217 504 63
G50/2-A	ZM-LN	CE-0085AQ 0721	DN 125	217 504 73
			R 1½	217 505 18
			R 2	217 505 19
			DN 65	217 505 43
			DN 80	217 505 53
DN 100	217 505 63			
DN 125	217 505 73			
DN 150	217 505 83			




Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Burner selection

Sizes 60 and 70, version LN

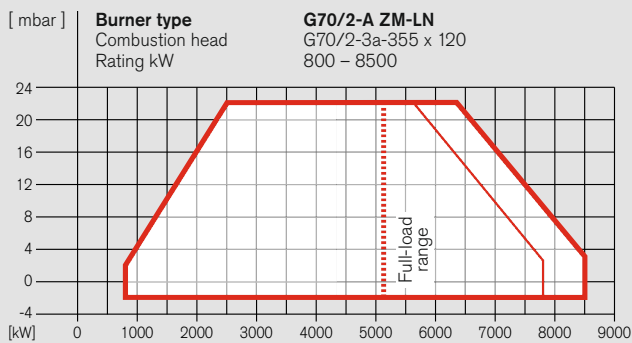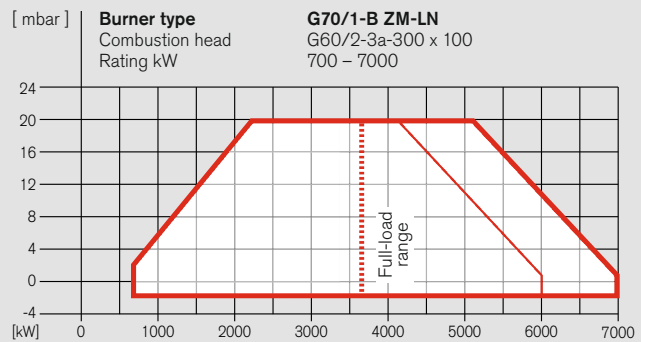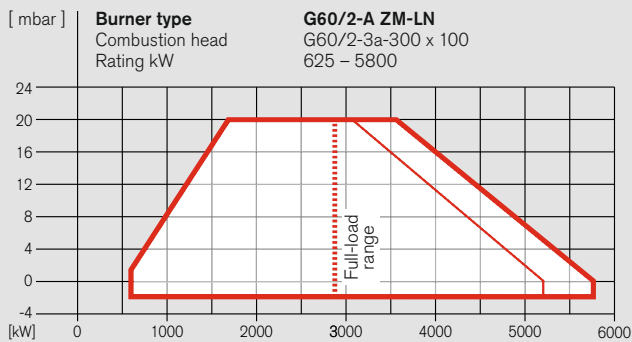

Burner type	Version	CE-PIN	Valve train	Order No.
G60/2-A	ZM-LN	CE-0085AQ 0722	R 2	217 605 13
			DN 65	217 605 43
			DN 80	217 605 53
			DN 100	217 605 63
			DN 125	217 605 73
G70/1-B	ZM-LN	CE-0085AQ 0723	DN 150	217 605 83
			DN 65	217 704 43
			DN 80	217 704 53
G70/2-A	ZM-LN	CE-0085AQ 0723	DN 100	217 704 63
			DN 125	217 704 73
			DN 150	217 704 83
			DN 65	217 705 43
			DN 80	217 705 53

Fuels – Rating with combustion head

open closed
 Nat. gas — —

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Gas valve train sizing

Size 50, version LN

Type 50/1-B, version LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 1½" 2" 65 80 100 125 Nominal diameter of gas butterfly 65 65 65 65 65 65	Nominal valve-train diameter 1½" 2" 65 80 100 125 Nominal diameter of gas butterfly 65 65 65 65 65 65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
1900	152 66 44 35 31 29
2050	173 73 47 37 32 30
2200	195 80 51 40 33 31
2400	228 91 56 43 35 33
2600	264 103 62 46 37 35
2800	- 115 68 49 39 36
3000	- 129 74 53 42 38

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
1900	215 90 58 46 39 37
2050	245 100 63 48 41 38
2200	278 110 68 51 42 39
2400	- 125 75 55 44 41
2600	- 142 82 59 47 43
2800	- 159 90 64 49 45
3000	- 178 99 68 52 46

Type 50/2-A, version LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 80 80 80 80 80 80	Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 80 80 80 80 80 80

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
2000	59 35 26 20 19 18
2300	77 45 33 26 24 23
2600	97 56 41 32 29 28
2900	119 68 49 38 35 33
3200	143 81 57 44 40 38
3500	169 95 66 50 45 43
3800	196 109 75 57 51 48
4100	226 124 85 63 57 53
4500	268 146 98 72 64 61

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
2000	79 44 31 23 21 20
2300	107 60 42 32 29 28
2600	137 77 54 42 38 36
2900	169 95 67 51 46 44
3200	205 115 80 61 55 52
3500	243 135 93 71 64 60
3800	284 157 108 81 73 69
4100	- 180 122 91 82 77
4500	- 212 143 106 94 88

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Sizes 60 and 70, version LN

Type 60/2-A, version LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35 \text{ kWh/mn}^3$; $d = 0.606$; $W_i = 13.295 \text{ kWh/mn}^3$		
2900	106 56 36 25 22 20	52 30 23 18 17 17
3250	134 70 45 32 27 25	66 38 29 24 22 21
3600	163 85 54 38 33 30	81 47 36 29 27 26
4000	200 104 66 46 39 36	99 57 44 35 33 32
4400	241 124 78 54 46 42	119 68 52 41 38 37
4600	262 134 85 58 49 45	130 73 56 45 41 40
4800	285 145 91 62 53 48	140 79 60 48 44 43
5000	- 157 98 66 56 51	152 85 65 51 47 46
5200	- 168 104 70 59 54	162 90 69 54 50 48

Natural gas LL (N) $H_i = 8.83 \text{ kWh/mn}^3$; $d = 0.641$; $W_i = 11.029 \text{ kWh/mn}^3$		
2900	147 73 44 29 24 22	69 37 27 20 18 18
3250	186 93 57 38 32 29	89 48 36 28 25 24
3600	229 115 71 47 40 36	111 61 46 35 32 31
4000	283 142 88 58 49 45	137 76 57 44 40 39
4400	- 171 105 70 58 53	166 91 68 53 49 47
4600	- 187 115 76 63 57	181 99 74 57 53 51
4800	- 203 124 82 68 62	197 108 81 62 57 55
5000	- 219 134 88 73 66	- 116 87 67 61 59
5200	- 235 142 93 77 69	- 124 92 70 64 62

Type 70/2-A, version LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 10 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35 \text{ kWh/mn}^3$; $d = 0.606$; $W_i = 13.295 \text{ kWh/mn}^3$		
5100	143 82 49 39 34	69 48 33 30 28
5600	172 98 59 46 40	83 57 40 35 34
6100	203 116 68 53 46	98 67 47 41 39
6600	236 134 79 61 53	113 78 54 47 45
7100	271 153 89 69 59	130 89 61 53 51
7600	- 173 100 77 66	147 100 68 60 56
8100	- 193 109 83 71	163 110 73 64 60
8500	- 208 117 88 74	176 117 77 67 63

Natural gas LL (N) $H_i = 8.83 \text{ kWh/mn}^3$; $d = 0.641$; $W_i = 11.029 \text{ kWh/mn}^3$		
5100	201 113 65 50 43	95 64 43 37 35
5600	242 135 78 59 51	114 77 52 45 43
6100	287 160 91 69 59	135 91 61 53 50
6600	- 185 105 80 68	157 105 70 61 57
7100	- 213 120 90 77	180 120 80 69 65
7600	- 241 135 101 85	- 136 90 77 73
8100	- 271 150 112 94	- 152 99 85 80
8500	- 293 160 118 98	- 162 104 88 82

Type 70/1-B, version LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35 \text{ kWh/mn}^3$; $d = 0.606$; $W_i = 13.295 \text{ kWh/mn}^3$		
3600	82 52 36 30 28	44 34 27 25 24
4000	102 64 44 37 34	55 42 33 31 30
4400	122 77 52 44 41	66 50 40 37 36
4800	144 90 61 52 47	78 59 47 43 42
5200	167 104 70 59 54	90 68 53 49 48
5600	192 119 79 66 60	103 78 60 56 54
6000	218 134 88 74 67	117 87 67 62 60
6400	246 150 98 82 74	131 98 75 69 67
7000	290 175 113 94 84	152 113 86 78 76

Natural gas LL (N) $H_i = 8.83 \text{ kWh/mn}^3$; $d = 0.641$; $W_i = 11.029 \text{ kWh/mn}^3$		
3600	113 69 45 38 34	59 43 33 30 29
4000	141 86 57 47 43	74 55 42 39 38
4400	170 105 69 58 52	90 68 52 48 46
4800	202 124 81 68 61	107 80 62 57 55
5200	236 144 94 78 71	125 93 72 66 64
5600	272 165 107 89 80	144 107 82 75 72
6000	- 187 121 100 90	163 121 92 84 81
6400	- 209 133 109 98	182 133 100 92 88
7000	- 243 153 124 111	- 153 114 103 100

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery/special equipment

Gas burners size 50 to 70, version LN

Scope of delivery	G50	G60	G70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, combustion manager with control unit, flame sensor, stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●
W-FM 100 combustion manager	●	●	●
Double gas solenoid valve (Class A)	●	●	●
Gas butterfly valve	●	●	●
Air-pressure switch	●	●	●
Low-gas-pressure switch	●	●	●
Mixing assembly with adjustable flame tube	●	●	●
Stepping motor for compound regulation of gas and air with W-FM 100	●	●	●
Stepping motor for air regulator	●	●	●
Stepping motor for gas butterfly valve	●	●	●
Special equipment			
Downward-firing version	○	○	○
Air-inlet flange for duct connection	○	○	○
Combustion-head extension	○	○	○
Integral capacity controller for W-FM 100	○	○	○
Variable speed drive	○	○	○
O ₂ trim	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○
Bus interface	○	○	○
High-gas-pressure switch	○	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 50 to 70, version LN


Technical data		G50/1-B			G50/2-A				
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0			W-D132/210-2/14K0				
Nominal rating	kW	9			14				
Current draw at 380 V (400 V)	A	18			28				
Motor pre-fusing (ΥΔ motor start)	A	35			50				
Speed (50 Hz)	rpm	2920			2920				
Fan wheel	Colour	blue			blue				
	ø	345 x 100			345 x 100				
Combustion manager	Type	W-FM 100			W-FM 100				
Ignition unit	Type	W-ZG02			W-ZG02				
Stepping motor	Air	Type	SQM45			SQM45			
	Fuel	Type	SQM45			SQM45			
Burner weight	kg (approx.)	185			185				
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

Technical data		G60/2-A			G70/1-B		G70/2-A		
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/210-2/14K0			W-D160/215-2/14K0		W-D160/240-2/22K0		
Nominal rating	kW	14			14		22		
Current draw at 380 V (400 V)	A	28			26		43		
Motor pre-fusing (ΥΔ motor start)	A	50			50		63		
Speed (50 Hz)	rpm	2920			2940		2940		
Fan wheel	Colour	blue			blue		blue		
	ø	515 x 120			590 x 160		590 x 160		
Combustion manager	Type	W-FM 100			W-FM 100		W-FM 100		
Ignition unit	Type	W-ZG02			W-ZG02		W-ZG02		
Stepping motor	Air	Type	SQM48			SQM48		SQM48	
	Fuel	Type	SQM45			SQM45		SQM45	
Burner weight	kg (approx.)	275			390		390		
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.




Dual-fuel burners

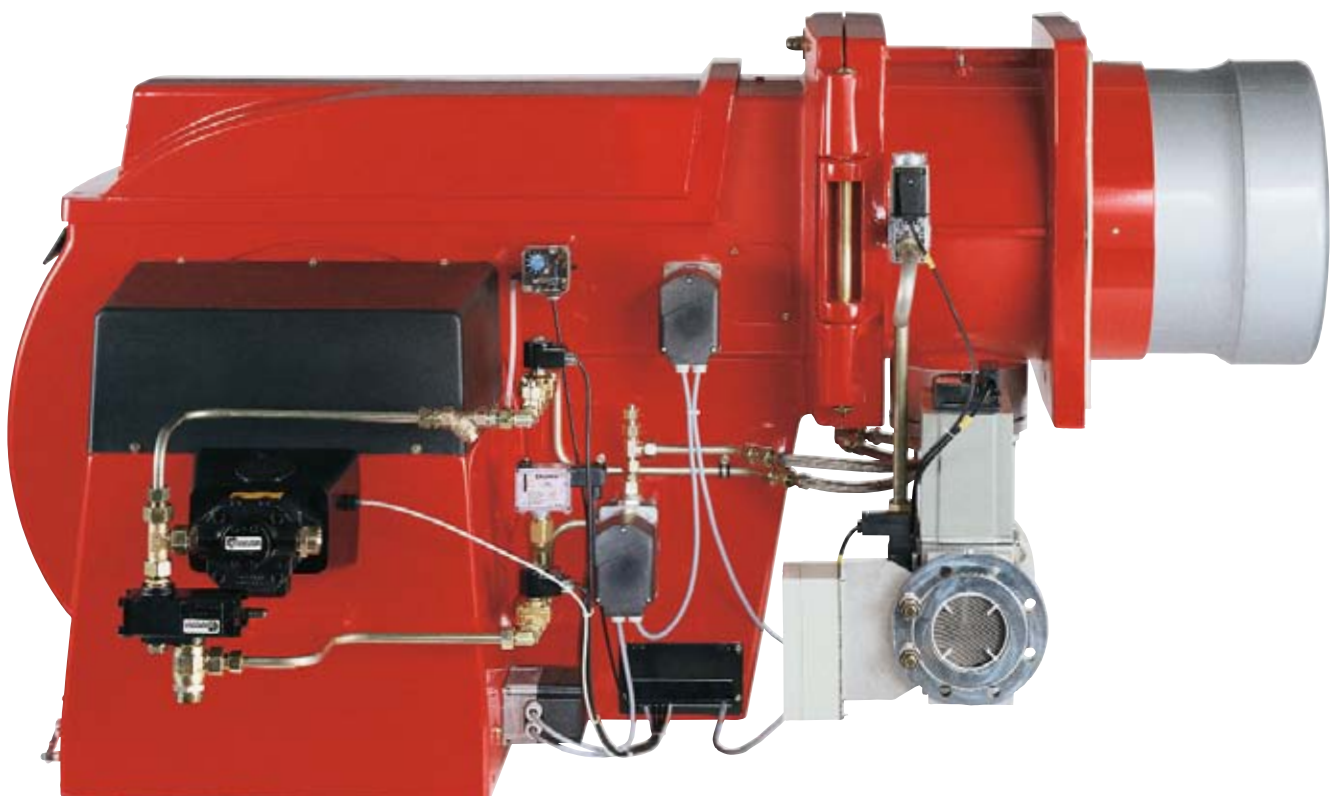

Burner selection

Size 30, version NR

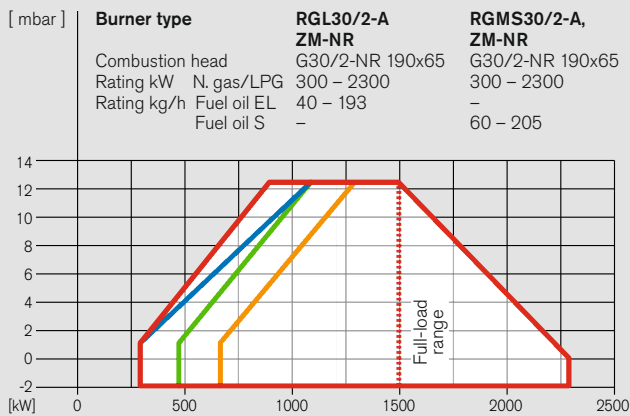

Fuels

Fuel oil EL	—
Fuel oil S	—
Nat. gas	—
LPG	—

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:



Insulation Class F, IP 55 protection, IE2 efficiency

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL30/2-A	ZM-NR	CE-0085-AP 0528 5G311/04 M	R 1½	218 305 13
			R 2	218 305 15
			DN 65	218 305 42
			DN 80	218 305 52
			DN 100	218 305 62
RGMS30/2-A*	ZM-NR	CE-0085-AP 0528 –	R 1½	219 305 13
			R 2	219 305 15
			DN 65	219 305 42
			DN 80	219 305 52
			DN 100	219 305 62
			DN 125	219 305 72

* LPG-fired burners do not have a Product ID No. (CE-PIN)

Burner selection

Size 40, version NR

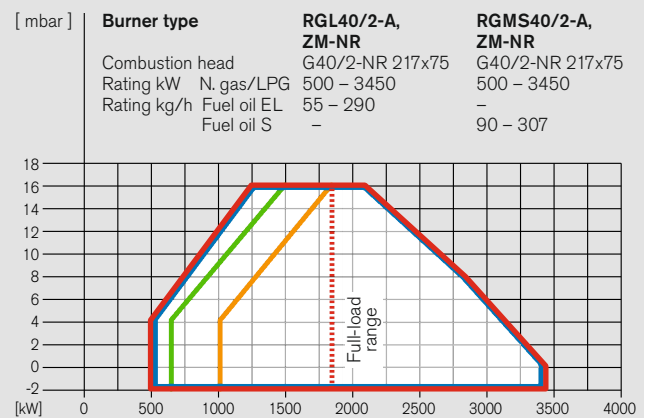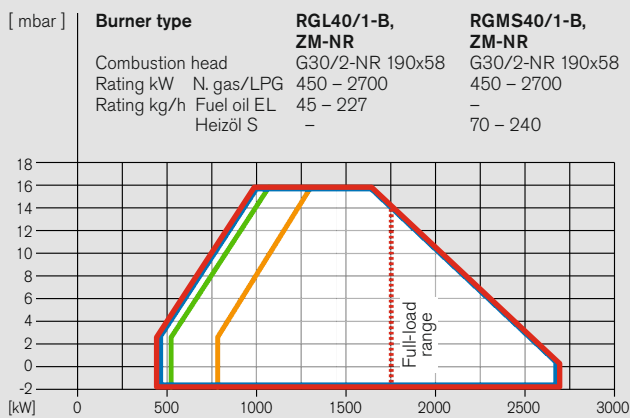

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGMS40/1-B*	ZM-NR	CE-0085-AQ 0720	R 1½	219 404 13
			R 2	219 404 15
			DN 65	219 404 42
			DN 80	219 404 52
			DN 100	219 404 62
RGL40/2-A	ZM-NR	CE-0085-AQ 0720 5G567/05M	R 1½	218 405 13
			R 2	218 405 15
			DN 65	218 405 42
			DN 80	218 405 52
			DN 100	218 405 62
RGMS40/2-A*	ZM-NR	CE-0085-AQ 0720	R 1½	219 405 13
			R 2	219 405 15
			DN 65	219 405 42
			DN 80	219 405 52
			DN 100	219 405 62
			DN 125	219 405 72

Fuels

- Fuel oil EL —
- Fuel oil S —
- Nat. gas —
- LPG —

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).


Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

* LPG-fired burners do not have a Product ID No. (CE-PIN)

Burner selection

Size 50, version NR

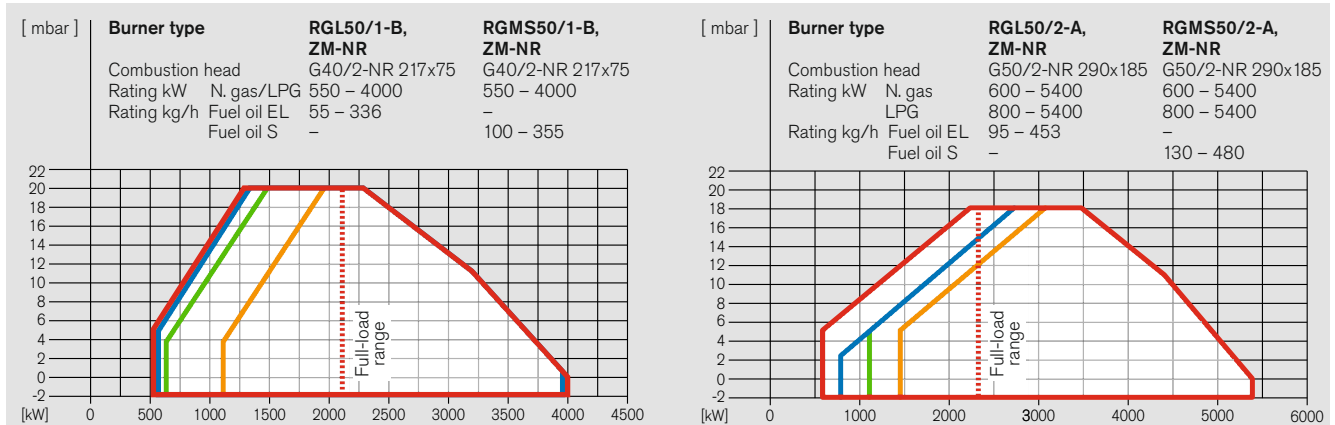

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL50/1-B	ZM-NR	CE-0085-AQ 0721 5G535/05M	R 1½	218 504 13
			R 2	218 504 15
			DN 65	218 504 42
			DN 80	218 504 52
			DN 100	218 504 62
RGMS50/1-B*	ZM-NR	-	R 1½	219 504 13
			R 2	219 504 15
			DN 65	219 504 42
			DN 80	219 504 52
			DN 100	219 504 62
RGL50/2-A	ZM-NR	CE-0085-AQ 0721 5G535/05M	R 1½	218 505 13
			R 2	218 505 15
			DN 65	218 505 42
			DN 80	218 505 52
			DN 100	218 505 62
RGMS50/2-A*	ZM-NR	-	R 1½	219 505 13
			R 2	219 505 15
			DN 65	219 505 42
			DN 80	219 505 52
			DN 100	219 505 62
			DN 125	219 505 72
			DN 150	218 505 82

* LPG-fired burners do not have a Product ID No. (CE-PIN)

- Fuels**
- Fuel oil EL —
 - Fuel oil S —
 - Nat. gas —
 - LPG —

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:



The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Burner selection

Sizes 60 and 70, version NR

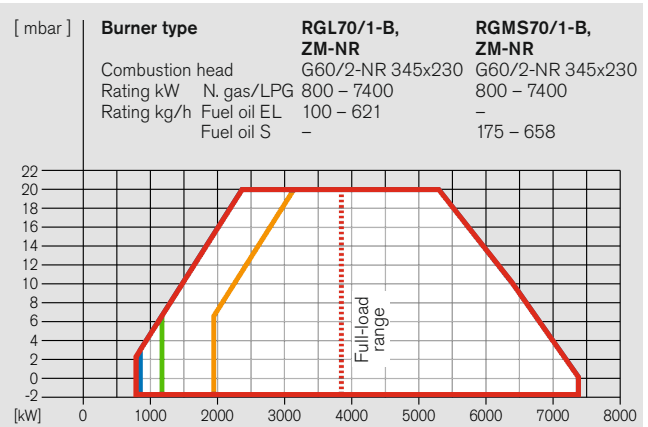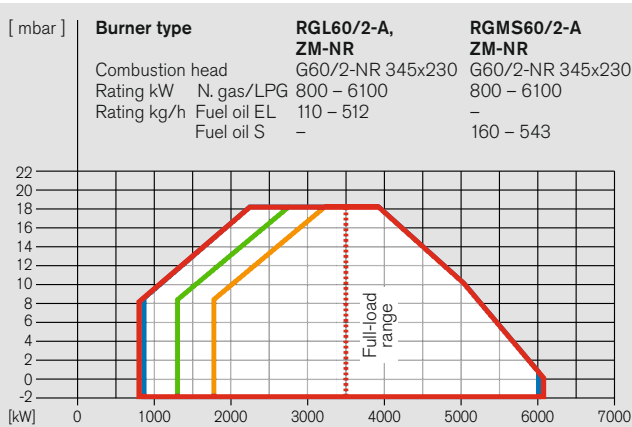

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL60/2-A	ZM-NR	CE-0085-AQ 0722 5G518/05M	DN 65	218 605 42
			DN 80	218 605 52
			DN 100	218 605 62
			DN 125	218 605 72
			DN 150 *	218 605 82
RGMS60/2-A*	ZM-NR	CE-0085-AQ 0722 –	DN 65	219 605 42
			DN 80	219 605 52
			DN 100	219 605 62
			DN 125	219 605 72
			DN 150 *	219 605 82
RGL70/1-B	ZM-NR	CE-0085-AQ 0723 5G519/05M	DN 65	218 704 42
			DN 80	218 704 52
			DN 100	218 704 62
			DN 125	218 704 72
			DN 150	218 704 82
RGMS70/1-B*	ZM-NR	CE-0085-AQ 0723 –	DN 65	219 704 42
			DN 80	219 704 52
			DN 100	219 704 62
			DN 125	219 704 72
			DN 150	219 704 82

- Fuels**
- Fuel oil EL —
 - Fuel oil S —
 - Nat. gas —
 - LPG —

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

* LPG-fired burners do not have a Product ID No. (CE-PIN)

Burner selection

Size 70, version NR

[mbar]	Burner type	RGL70/3-A ZM-NR	RGMS70/3-A ZM-NR
	Combustion head	G70/3-A-NR 425x290	G70/3-A-NR 425x290
	Rating kW	Nat. gas 1000 – 10700 LPG 1400 – 10700	1000 – 10700 1400 – 10700
	Rating kg/h	Fuel oil EL 147 – 899 Fuel oil S –	– 156 – 954

[mbar]	Burner type	RGL70/4-A, ZM-NR	RGMS70/4-A ZM-NR
	Combustion head	G70/3-A-NR 425x290	G70/3-A-NR 425x290
	Rating kW	Nat. gas 1000 – 11700 LPG 1400 – 11700	1000 – 11700 1400 – 11700
	Rating kg/h	Fuel oil EL 147 – 983 Fuel oil S –	– 156 – 1043

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL70/3-A	ZM-NR	CE-0085-AQ 0723 5G519/05M	DN 65	218 714 14
			DN 80	218 714 15
			DN 100	218 714 16
			DN 125	218 714 17
			DN 150	218 714 18
RGMS70/3-A	ZM-NR	CE-0085-AQ 0723 –	DN 65	219 714 14
			DN 80	219 714 15
			DN 100	219 714 16
			DN 125	219 714 17
			DN 150	219 714 18
RGL70/4-A *	ZM-NR	CE-0085-AQ 0723 5G519/05M	DN 65	218 734 14
			DN 80	218 734 15
			DN 100	218 734 16
			DN 125	218 734 17
			DN 150	218 734 18
RGMS70/4-A *	ZM-NR	CE-0085-AQ 0723 –	DN 65	219 734 14
			DN 80	219 734 15
			DN 100	219 734 16
			DN 125	219 734 17
			DN 150	219 734 18

* Equipped with W-FM 200 and VSD as standard

Fuels

- Fuel oil EL —
- Fuel oil S —
- Nat. gas —
- LPG —

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:
The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:
Insulation Class F, IP 55 protection, IE2 efficiency

Gas valve train sizing

Sizes 30 and 40, version NR

Type 30/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	50 50 50 50 50 50	50 50 50 50 50 50

Natural gas E (N)	$H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³
1500	89 35 21 16 13 12
1600	100 39 24 18 15 14
1700	113 44 27 20 16 15
1800	127 49 30 22 18 17
1900	141 55 33 24 20 18
2000	156 60 36 27 22 20
2100	171 66 39 29 24 22
2300	205 79 47 34 28 25

Natural gas LL (N)	$H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³
1500	126 48 28 21 17 15
1600	143 54 32 23 18 17
1700	161 61 36 26 21 19
1800	181 68 40 29 23 21
1900	201 76 44 32 25 23
2000	222 84 49 35 28 25
2100	245 92 53 38 30 28
2300	- 110 63 45 35 32

LPG (F)	$H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³
1500	41 19 13 11 10 9
1600	46 21 14 12 11 10
1700	51 23 16 13 12 11
1800	57 26 18 15 13 12
1900	64 28 20 16 14 14
2000	70 31 21 17 15 15
2100	77 34 23 19 17 16
2300	92 40 27 22 19 19

Type 40/1-B, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	50 50 50 50 50 50	50 50 50 50 50 50

Natural gas E (N)	$H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³
1750	120 47 28 21 17 16
1900	141 55 33 24 20 18
2050	163 63 38 28 23 21
2200	187 72 43 32 25 23
2350	214 82 49 36 29 26
2500	241 92 55 40 32 30
2700	- 107 63 46 37 34

Natural gas LL (N)	$H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³
1750	171 65 38 27 22 20
1900	201 76 44 32 25 23
2050	233 88 51 37 29 26
2200	- 101 58 42 33 30
2350	- 115 66 47 37 34
2500	- 129 74 53 41 38
2700	- 150 86 61 48 43

LPG (F)	$H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³
1750	54 25 17 14 12 12
1900	64 28 20 16 14 14
2050	74 33 22 18 16 15
2200	84 37 25 20 18 17
2350	96 42 28 23 20 19
2500	108 47 32 26 23 21
2700	126 54 36 29 26 24

Type 40/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	65 65 65 65 65 65	65 65 65 65 65 65

Natural gas E (N)	$H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³
1800	121 44 25 17 13 12
2000	149 54 30 20 15 14
2200	180 65 36 24 18 16
2400	214 77 42 29 21 19
2600	251 90 49 33 24 22
2800	- 103 56 38 28 24
3125	- 128 69 46 34 30
3450	- 156 84 56 41 36

Natural gas LL (N)	$H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³
1800	174 62 34 23 17 15
2000	215 76 41 27 20 18
2200	259 92 49 33 24 21
2400	- 109 58 39 28 25
2600	- 127 68 45 32 28
2800	- 147 78 51 37 32
3125	- 183 97 63 45 40
3450	- 222 117 77 55 48

LPG (F)	$H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³
1800	53 21 13 10 8 -
2000	65 26 16 12 10 9
2200	78 30 18 14 11 10
2400	92 36 21 16 13 12
2600	107 41 25 18 15 14
2800	124 47 28 20 16 15
3125	154 59 35 25 20 19
3450	187 71 42 30 24 22

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 50, version NR

Type 50/1-B, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)						High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)					
	Nominal valve-train diameter						Nominal valve-train diameter					
	1½"	2"	65	80	100	125	1½"	2"	65	80	100	125
	Nominal diameter of gas butterfly						Nominal diameter of gas butterfly					
	65	65	65	65	65	65	65	65	65	65	65	65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2100	164	59	33	22	17	15	87	30	18	14	12	11
2400	214	77	42	29	21	19	113	39	24	19	16	15
2700	270	96	52	35	26	23	-	49	30	24	20	19
3000	-	118	64	43	32	28	-	61	37	29	24	23
3300	-	143	77	51	38	33	-	73	44	36	30	28
3600	-	169	91	60	44	39	-	87	52	42	35	33
4000	-	208	111	74	53	47	-	107	65	52	43	40

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2100	236	84	45	30	22	19	125	42	25	20	16	15
2400	-	109	58	39	28	25	-	55	33	26	21	20
2700	-	137	73	48	34	30	-	69	41	32	26	25
3000	-	168	89	59	42	37	-	85	51	40	33	31
3300	-	203	107	70	50	44	-	103	61	48	40	37
3600	-	241	127	83	59	51	-	123	72	57	47	44
4000	-	297	156	102	72	63	-	-	89	71	58	54

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³												
2100	71	28	17	13	10	10	38	14	9	8	7	7
2400	92	36	21	16	13	12	49	19	12	11	9	9
2700	116	44	26	19	16	14	62	24	16	13	11	11
3000	142	55	32	24	19	17	77	29	20	17	14	14
3300	172	65	38	28	22	21	93	35	24	20	18	17
3600	204	77	45	33	26	24	111	42	28	24	21	20
4000	251	94	55	39	31	28	136	52	34	29	25	24

Type 50/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, \max} = 300$ mbar)								High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)							
	Nominal valve-train diameter								Nominal valve-train diameter							
	1½"	2"	65	80	100	125	150	1½"	2"	65	80	100	125	150		
	Nominal diameter of gas butterfly								Nominal diameter of gas butterfly							
	80	80	80	80	80	80	80	80	80	80	80	80	80	80		

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³														
2300	210	84	52	40	33	31	30	118	49	35	31	28	27	27
2800	-	113	66	47	38	34	33	-	63	42	35	31	30	29
3300	-	147	82	56	42	38	36	-	78	49	40	34	33	32
3800	-	193	105	71	53	47	44	-	101	63	51	43	41	40
4300	-	247	135	92	68	61	57	-	130	81	66	56	53	52
4800	-	-	167	113	84	74	70	-	-	101	82	69	66	65
5400	-	-	208	140	103	91	85	-	-	125	101	85	81	79

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³														
2300	-	120	74	56	46	43	41	-	71	50	44	40	38	38
2800	-	162	93	67	52	48	46	-	90	59	50	44	42	42
3300	-	212	116	79	59	53	50	-	112	70	57	49	46	45
3800	-	275	148	99	72	64	60	-	148	88	71	59	56	55
4300	-	-	187	124	90	79	74	-	-	110	89	74	70	68
4800	-	-	229	151	103	95	89	-	-	134	107	89	84	82
5400	-	-	284	185	131	114	106	-	-	130	107	101	98	98

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³														
2300	86	35	22	17	14	13	13	47	19	13	11	10	10	10
2800	129	52	33	25	21	20	19	71	30	21	19	17	16	16
3300	179	72	45	35	29	27	27	100	42	31	27	24	24	24
3800	237	96	60	46	38	36	35	133	57	41	36	33	32	32
4300	-	121	76	58	48	45	44	-	72	52	46	42	41	40
4800	-	150	93	71	59	55	53	-	90	64	57	52	50	50
5400	-	188	116	88	73	68	66	-	112	81	71	64	63	62

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 60, version NR

Type 60/2-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/m ³ ; $d = 0.606$; $W_i = 13.295$ kWh/m ³												
4000	197	101	63	43	36	33	96	54	41	32	30	29
4300	228	116	73	49	42	39	112	63	48	38	35	34
4500	250	127	80	54	46	42	123	69	52	41	38	37
4800	284	144	90	61	52	47	139	78	59	47	43	42
5000	-	156	97	66	56	51	151	85	64	50	47	45
5300	-	174	109	73	62	56	169	94	72	56	52	50
5600	-	194	120	80	68	62	188	105	79	62	57	55
6100	-	227	140	93	78	71	-	122	92	71	66	64

Natural gas LL (N) $H_i = 8.83$ kWh/m ³ ; $d = 0.641$; $W_i = 11.029$ kWh/m ³												
4000	278	138	83	54	44	40	133	71	52	39	36	35
4300	-	160	97	62	52	47	154	83	61	46	42	41
4500	-	175	106	68	57	51	169	91	67	51	46	45
4800	-	198	120	77	64	58	193	103	76	58	53	51
5000	-	215	130	84	69	62	-	112	83	63	57	55
5300	-	241	145	93	77	69	-	125	92	70	64	61
5600	-	267	160	103	84	76	-	139	102	77	70	68
6100	-	-	188	119	98	87	-	163	119	89	81	78

LPG (F) $H_i = 25.89$ kWh/m ³ ; $d = 1.555$; $W_i = 20.762$ kWh/m ³												
4000	95	55	39	31	28	27	52	34	29	25	24	24
4300	109	63	45	36	33	31	60	40	34	29	28	28
4500	119	69	49	39	36	34	66	43	37	32	31	30
4800	135	78	56	44	40	38	74	49	42	36	35	35
5000	146	84	60	47	43	41	81	53	45	39	38	37
5300	164	94	67	52	48	45	90	60	50	44	42	41
5600	182	104	74	57	52	50	100	66	56	48	46	46
6100	214	122	86	67	60	58	118	77	65	56	54	53

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 70, version NR

Type 70/1-B, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
3900	189 97 62 42 36 33
4400	239 122 77 52 44 41
4900	295 150 93 63 53 49
5400	- 180 112 75 63 57
5900	- 213 132 87 73 67
6400	- 249 153 101 85 77
6900	- 288 177 116 97 88
7400	- - 202 132 110 100

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
3900	268 134 82 54 46 41
4400	- 170 104 68 57 52
4900	- 209 127 83 69 63
5400	- 253 153 100 83 75
5900	- - 182 117 97 88
6400	- - 212 137 113 102
6900	- - 245 157 129 116
7400	- - 280 179 147 132

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
3900	82 45 30 22 20 18
4400	105 57 39 29 25 24
4900	130 71 48 35 31 30
5400	158 86 58 42 38 35
5900	188 101 68 50 44 41
6400	220 118 79 58 51 48
6900	254 136 90 66 58 54
7400	291 155 103 74 65 61

Type 70/3-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
5300	146 80 45 33 28
6000	187 102 57 42 35
7000	253 138 76 56 47
8000	- 179 98 72 60
9000	- 226 123 90 75
10000	- 278 151 111 92
10700	- - 172 126 105

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
5300	210 115 63 46 39
6000	269 146 79 58 49
7000	- 197 107 78 65
8000	- 256 138 101 83
9000	- - 174 127 104
10000	- - 214 155 128
10700	- - 244 177 146

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
5300	69 42 27 23 20
6000	84 49 31 25 22
7000	110 63 37 29 26
8000	141 80 46 36 31
9000	177 99 57 44 37
10000	218 122 70 53 46
10700	250 140 80 61 52

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 70, version NR

Type 70/4-A, version NR

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
5300	146 80 45 33 28
6000	187 102 57 42 35
7000	253 138 76 56 47
8000	- 179 98 72 60
9000	- 226 123 90 75
10000	- 278 151 111 92
11000	- - 182 133 110
11700	- - 205 150 124

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
5300	210 115 63 46 39
6000	269 146 79 58 49
7000	- 197 107 78 65
8000	- 256 138 101 83
9000	- - 174 127 104
10000	- - 214 155 128
11000	- - 258 187 154
11700	- - 291 211 173

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³	
5300	69 42 27 23 20
6000	84 49 31 25 22
7000	110 63 37 29 26
8000	141 80 46 36 31
9000	177 99 57 44 37
10000	218 122 70 53 46
11000	264 148 85 65 55
11700	299 167 96 74 63

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery, special equipment

Sizes 30 to 50, version NR

Scope of delivery	RGMS30	RGMS40	RGMS50	RGL30	RGL40	RGL50
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, nozzle assembly with oil nozzle(s), combustion manager with control unit, flame sensor stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●	●	●	●
W-FM 100 combustion manager	●	●	●	●	●	●
Double gas solenoid valve (Class A)	●	●	●	●	●	●
Gas butterfly valve	●	●	●	●	●	●
Pilot line	●	●	●	●	●	●
Air-pressure switch	●	●	●	●	●	●
Oil-pressure switch in return	●	●	●	●	●	●
Low-gas-pressure switch	●	●	●	●	●	●
Mixing assembly with modulating regulating sleeve	●	●	●	●	●	●
Stepping motor for compound regulation of gas and air with W-FM 100	●	●	●	●	●	●
Stepping motor for air regulator	●	●	●	●	●	●
Stepping motor for gas butterfly valve	●	●	●	●	●	●
Stepping motor for regulating sleeve	●	●	●	●	●	●
Oil pump, fitted	●	●	●	●	●	●
Oil preheater, fitted	●	●	●	-	-	-
Oil hoses	●	●	●	●	●	●
2 solenoid valves in supply and return	-	-	-	●	-	-
Solenoid valve in supply and return, nozzle assembly with shut-off device (solenoid)	●	●	●	-	●	●
Electromagnetic clutch	●	●	●	●	●	●
Special equipment						
Downward-firing version	-	-	○	○	○	○
Air-inlet flange for duct connection	-	-	○	○	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post-purge	-	-	○	○	○	○
Combustion-head extension	-	-	○	○	○	○
Integral capacity controller for W-FM 100	-	-	○	○	○	○
Variable speed drive	-	-	○	○	○	○
O ₂ trim	-	-	○	○	○	○
W-FM supplied loose for mounting in a control panel	-	-	○	○	○	○
Bus interface	-	-	○	○	○	○
TRD 24 h/72 h execution	-	-	○	○	○	○
High-gas-pressure switch	-	-	○	○	○	○
Separate pump station	○	○	○	○	○	○
Separate preheater station (electric/medium)	○	○	○	-	-	-
Multi-language ABE	○	○	○	○	○	○
Offset gas butterfly valve and DMV	○	○	○	○	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Scope of delivery, special equipment

Sizes 60 and 70, version NR

Scope of delivery	RGMS60	RGMS70	RGL60	RGL70 / 70/4
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, nozzle assembly with oil nozzle(s), combustion manager with control unit, flame sensor stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●	●
W-FM 100 combustion manager	●	●	●	–
W-FM 200 combustion manager	–	–	–	●
Double gas solenoid valve (Class A)	●	●	●	●
Gas butterfly valve	●	●	●	●
Pilot line	●	●	●	●
Air-pressure switch	●	●	●	●
Oil-pressure switch in return	●	●	●	●
Low-gas-pressure switch	●	●	●	●
Mixing assembly with modulating regulating sleeve	●	●	●	●
Stepping motor for compound regulation of gas and air with W-FM 100	●	●	●	●
Stepping motor for air regulator	●	●	●	●
Stepping motor for gas butterfly valve	●	●	●	●
Stepping motor for regulating sleeve	●	●	●	●
Oil pump, fitted	–	–	●	●
Oil hoses	●	●	●	●
Solenoid valve in supply and return, nozzle assembly with shut-off device (solenoid)	●	●	●	●
Electromagnetic clutch	●	●	●	●
Special equipment				
Downward-firing version	○	○	○	○
Air-inlet flange for duct connection	○	○	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post-purge	○	○	○	○
Combustion-head extension	○	○	○	○
Integral capacity controller for W-FM 100	○	○	○	–
Variable speed drive	○	○	○	●
O ₂ trim	○	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○	○
Bus interface	○	○	○	○
TRD 24 h/72 h execution	○	○	○	○
High-gas-pressure switch	○	○	○	○
Separate pump station	○	○	○	○
Separate preheater station (electric/medium)	○	○	–	–
Multi-language ABE	○	○	○	○
Offset gas butterfly valve and DMV	○	○	○	○

● Standard
○ Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 30 and 40, version NR

Technical data				RGL30/2-A			RGMS30/2-A		
400 V, 3 ~ burner motor ¹⁾	Type	W-D112/140-2/4K5			W-D112/140-2/4K5				
Nominal rating	kW	4.5			4.5				
Current draw at 400 V	A	9.1			9.1				
Motor pre-fusing (YΔ motor start)	A	16			16				
Speed (50 Hz)	rpm	2900			2900				
Fan wheel	Colour / ø	blue / 268 x 100			blue / 268 x 100				
Combustion manager	Type	W-FM 100			W-FM 100				
Ignition unit	Type	W-ZG02			W-ZG02				
Stepping motor	Air	Type	SQM45			SQM45			
	Mixing assembly	Type	SQM45			SQM45			
	Fuel	Type	SQM45			SQM45			
Integral pump	Type	TA3			TA3				
Oil preheater	Type	–			EV2D				
	Oil throughput	kg/h	–			270			
	Heating capacity	kW	–			13.2			
Oil solenoid valves	115 V, 1/4" (supply)	20 W	Type	121 K 6220 (x 2)			–		
	115 V, 1/8" (return)	20 W	Type	121 K 2423 (x 2)			–		
	115 V, 3/8" (supply)	20 W	Type	–			321 H 2322		
	115 V, 3/8" (supply)	20 W	Type	–			121 G 2320		
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F001			–			
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–			DSA 46 F001			
Oil hoses	DN / length	20 / 1000			–				
(metal, high-pressure hoses on RGMS burners)	DN / length	–			20 / 1300				
Burner weight	kg (approx.)	145			175				
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

Technical data				RGL40/1-B			RGMS40/1-B		
				RGL40/2-A			RGMS40/2-A		
400 V, 3 ~ burner motor ¹⁾ 40/1	Type	W-D112/170-2/5K5			W-D112/170-2/5K5				
Nominal rating	kW	5.5			5.5				
Current draw at 400 V	A	13			13				
Motor pre-fusing (YΔ motor start)	A	20			20				
400 V, 3 ~ burner motor ¹⁾ 40/2	Type	W-D112/170-2/7K0			W-D112/170-2/7K0				
Nominal rating	kW	7			7				
Current draw at 400 V	A	15			15				
Motor pre-fusing (YΔ motor start)	A	25			25				
Speed (50 Hz)	rpm	2930			2930				
Fan wheel	Colour / ø	blue / 295 x 100			blue / 295 x 100				
Combustion manager	Type	W-FM 100			W-FM 100				
Ignition unit	Type	W-ZG02			W-ZG02				
Stepping motor	Air	Type	SQM45			SQM45			
	Mixing assembly	Type	SQM45			SQM45			
	Fuel	Type	SQM45			SQM45			
Integral pump	Type	TA3			TA3				
Oil preheater	Type	–			EV2D				
	Oil throughput	kg/h	–			270			
	Heating capacity	kW	–			13.2			
Oil solenoid valves	115 V, 1/4" (supply)	20 W	Type	321 H 2322			321 H 2322		
	115 V, 1/8" (return)	20 W	Type	121 G 2320			121 G 2320		
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F001			–			
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–			DSA 46 F001			
Oil hoses	DN / length	20 / 1000			–				
(metal, high-pressure hoses on RGMS burners)	DN / length	–			20 / 1300				
Burner weight	kg (approx.)	190			190				
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

Technical data

Size 50, version NR

Technical data		RGL50/1-B			RGL50/2-A				
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0			W-D132/210-2/14K0				
Nominal rating	kW	9			14				
Current draw at 400 V	A	18			28				
Motor pre-fusing (ΥΔ motor start)	A	35			50				
Speed (50 Hz)	rpm	2920			2920				
Fan wheel	Colour	blue			blue				
	ø	345 x 100			345 x 100				
Combustion manager	Type	W-FM 100			W-FM 100				
Ignition unit	Type	W-ZG02			W-ZG02				
Stepping motor	Air	Type	SQM45			SQM45			
	Mixing assembly	Type	SQM45			SQM45			
	Fuel	Type	SQM45			SQM45			
Integral pump	Type	TA4C			T2C				
Oil solenoid valves	115 V, 3/8" (supply)	20W	Type	321 H 2322			321 H 2322		
	115 V, 3/8" (return)	20W	Type	121 G 2320			121 G 2320		
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F001			DSA 46 F001			
Oil hoses	DN / length	25 / 1300			25 / 1300				
Burner weight	kg (approx.)	230			230				
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

Technical data		RGMS50/1-B			RGMS50/2-A				
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0			W-D132/210-2/14K0				
Nominal rating	kW	9			14				
Current draw at 400 V	A	18			28				
Motor pre-fusing (ΥΔ motor start)	A	35			50				
Speed (50 Hz)	rpm	2920			2920				
Fan wheel	Colour	blue			blue				
	ø	345 x 100			345 x 100				
Combustion manager	Type	W-FM 100			W-FM 100				
Ignition unit	Type	W-ZG02			W-ZG02				
Stepping motor	Air	Type	SQM45			SQM45			
	Mixing assembly	Type	SQM45			SQM45			
	Fuel	Type	SQM45			SQM45			
Oil preheater	Oil throughput	Type	WEV2.2/01 ²⁾			WEV3/01			
		kg/h	300			500			
		kW	13.8			22.4			
Integral pump	Type	TA4C			T2C				
Oil solenoid valves	115 V, 3/8" (supply)	20W	Type	321 H 2322			321 H 2322		
	115 V, 3/8" (return)	20W	Type	121 G 2320			121 G 2320		
Oil-pressure switch	1 – 10 bar (return, fuel oil S - 7 bar)	Type	DSA 46 F001			DSA 46 F001			
Oil hoses	DN / length	25 / 1500			25 / 1500				
Burner weight	kg (approx.)	305			305				
Weight (DMV and fittings)	R / DN	1½	2	65	80	100	125	150	
	kg (approx.)	23	25	65	80	130	220	240	

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Burners above 300 kg/h: WEV3 oil preheater in lieu of WEV2.2, see special equipment for additional price.

Technical data

Size 60, version NR

Technical data		RGL60/2-A		RGMS60/2-A			
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/210-2/14K0		W-D132/210-2/14K0			
Nominal rating	kW	14		14			
Current draw at 400 V	A	28		28			
Motor pre-fusing (ΥΔ motor start)	A	50		50			
Speed (50 Hz)	rpm	2920		2920			
Fan wheel	Colour	blue		blue			
	ø	515 x 120		515 x 120			
Combustion manager	Type	W-FM 100		W-FM 100			
Ignition unit	Type	W-ZG02		W-ZG02			
Stepping motor	Air	Type	SQM48		SQM48		
	Mixing assembly	Type	SQM45		SQM45		
	Fuel	Type	SQM45		SQM45		
Integral pump	Type	T2C		-			
Oil solenoid valves	115 V, 3/8" (supply)	20W	Type	321 H 2322		321 H 2322	
	115 V, 3/8" (return)	20W	Type	121 G 2320		121 G 2320	
	230 V, 3/8" (bypass)	19W	Type	-		322 H 7306	
Oil-pressure switch	3 – 25 bar (supply - 18 bar)	Type	-		DSA 58 F001		
	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F001		-		
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	-		DSA 46 F001		
Oil hoses (metal, high-pressure hoses on RGMS burners)	DN / length	25 / 1300		-			
	DN / length	-		16 / 1500			
Burner weight	kg (approx.)	310		290 ²⁾			
Weight (DMV and fittings)	R / DN	2	65	80	100	125	150
	kg (approx.)	25	65	80	130	220	240

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Weight excluding pump and preheater stations.

Technical data

Dual fuel burners size 70, version NR

Technical data		RGL70/1-B	RGMS70/1-B	RGL70/3-A	RGMS70/3-A
400 V, 3 ~ burner motor ¹⁾	Type	W-D160/240-2/18K0	W-D160/240-2/18K0	W-D160/240-2/22K0	W-D160/240-2/22K0
Nominal rating	kW	18	18	22	22
Current draw at 400 V	A	34,5	34,5	43	43
Motor pre-fusing (ΥΔ motor start)	A	63	63	63	63
Speed (50 Hz)	rpm	2950	2950	2940	2940
Fan wheel	Colour	green	green	blue	blue
	ø	530 x 120	530 x 120	590 x 160	590 x 160
Combustion manager	Type	W-FM 100	W-FM 100	W-FM 100	W-FM 100
Ignition unit	Type	W-ZG02	W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM48	SQM48	SQM48
	Mixing assembly	Type	SQM45	SQM45	SQM45
	Fuel	Type	SQM45	SQM45	SQM45
Integral pump	Type	T2C (< 600 kg/h)	–	T3C	–
	Type	T3C (> 600 kg/h)	–	T3C	–
Oil solenoid valves	115 V, 1/2" (supply)	20W Type	321 H 2522	321 H 2522	321 H 2522
	115 V, 1/2" (return)	20W Type	121 G 2520	121 G 2520	121 G 2520
	230 V, 3/8" (bypass)	19W Type	–	322 H 7306	322 H 7306
Oil-pressure switch	3 – 25 bar (supply - 18 bar)	Type	–	DSA 58 F001	–
	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 46 F001	–	DSA 46 F001
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–	DSA 46 F001	–
Oil hoses (metal, high-pressure hoses on RGMS burners)	DN / length	25 / 1300	–	25 / 1300	–
	DN / length	–	20 / 1150	–	20 / 1150
	DN / length	–	20 / 1500	–	20 / 1500
Burner weight	kg (approx.)	430	385 ²⁾	430	385 ²⁾
Weight (DMV and fittings)	R / DN	2 65	80 100	125 150	
	kg (approx.)	25 65	80 130	220 240	

Technical data		RGL70/4-A	RGMS70/4-A
400 V, 3 ~ burner motor ¹⁾	Type	W-D160/240-2/28K0	W-D160/240-2/28K0
Nominal rating	kW	28	28
Current draw at 400 V	A	53	53
Motor pre-fusing (ΥΔ motor start)	A	*	*
Speed (50 Hz)	rpm	3220	3220
Frequency convertor with braking resistor	Type	FC301 P22K IP 20	FC301 P22K IP 20
Fan wheel	Colour	blue	blue
	ø	590 x 160	590 x 160
Combustion manager	Type	W-FM 200	W-FM 200
Ignition unit	Type	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM48
	Mixing assembly	Type	SQM48
	Fuel	Type	SQM45
Integral pump	Type	T4C	–
Oil solenoid valves	115 V, 1/2" (supply)	20W Type	321 H 2522
	115 V, 1/2" (return)	20W Type	121 G 2520
	230 V, 3/8" (bypass)	19W Type	322 H 7306
Oil-pressure switch	3 – 25 bar (supply - 18 bar)	Type	–
	1 – 10 bar (return, fuel oil EL - 5 bar)	Type	DSA 58 F001
	1 – 10 bar (return, fuel oil S - 7 bar)	Type	–
Oil hoses (metal, high-pressure hoses on RGMS burners)	DN / length	25 / 1300	–
	DN / length	–	20 / 1150
	DN / length	–	20 / 1500
Burner weight	kg (approx.)	430	385 ²⁾
Weight (DMV and fittings)	R / DN	2 65	80 100 125 150
	kg (approx.)	25 65	80 130 220 240


¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

²⁾ Weight excluding pump and preheater stations.

* 55 Hz operation with frequency convertor only.


Burner selection

Size 50, version 1LN

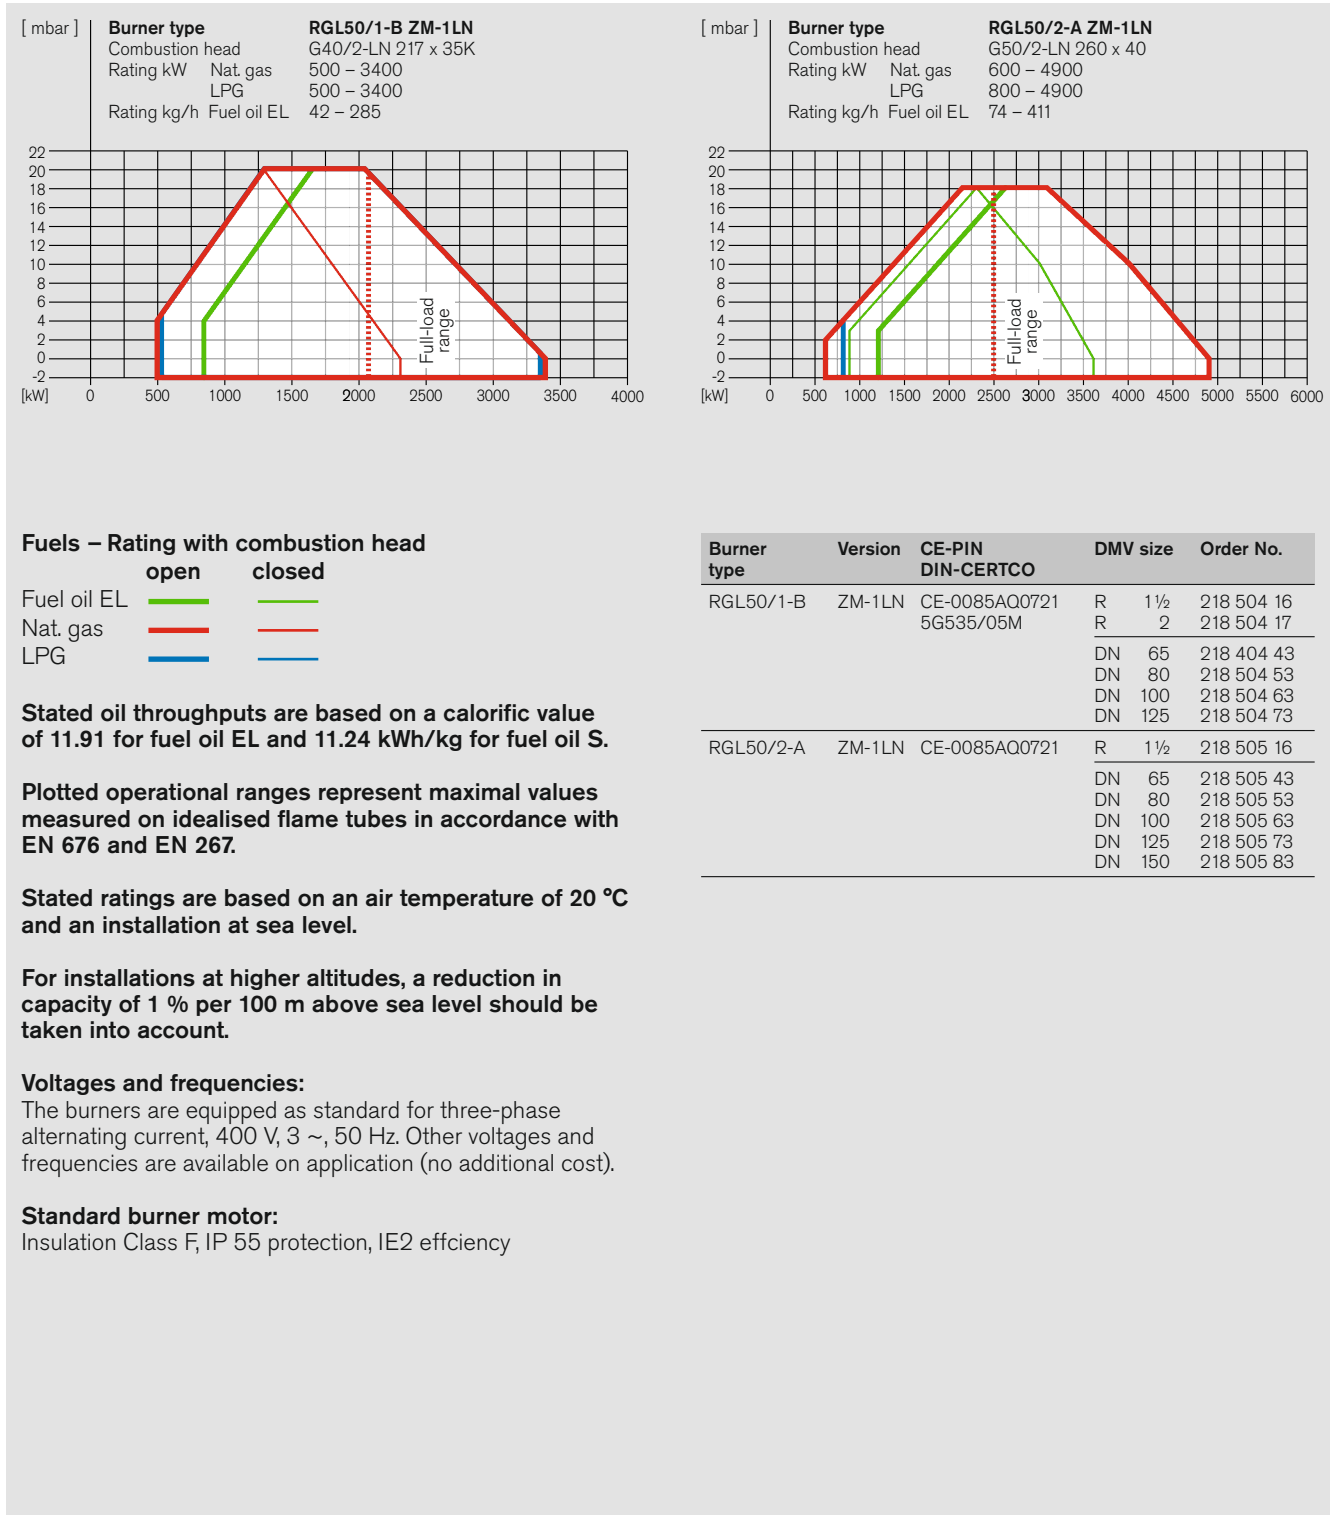

Burner selection

Size 70, version 1LN

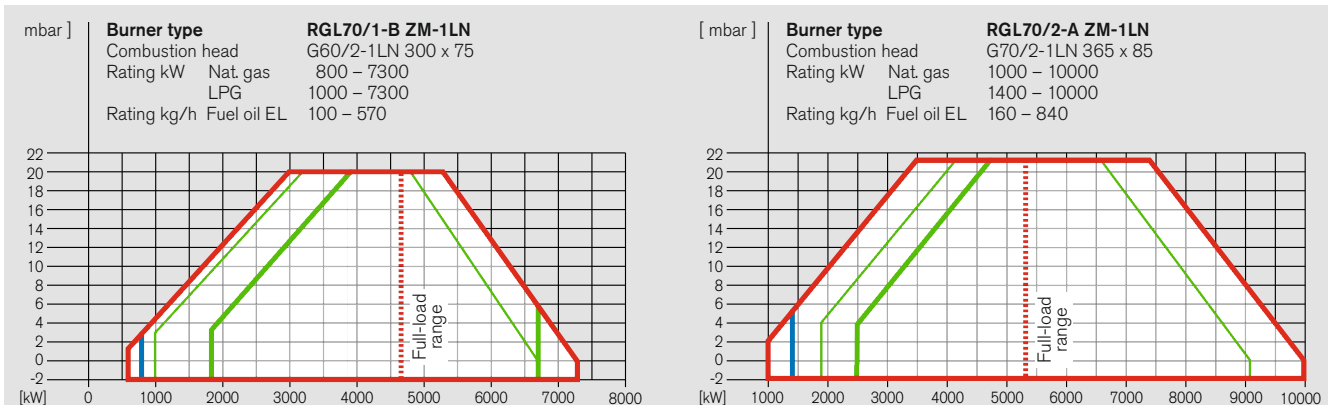

Fuels – Rating with combustion head

	open	closed
Fuel oil EL		
Nat. gas		
LPG		

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL and 11.24 kWh/kg for fuel oil S.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL70/1-B	ZM-1LN	CE-0085AQ0723 5G519/05M	DN 65	218 704 43
			DN 80	218 704 53
			DN 100	218 704 63
			DN 125	218 704 73
			DN 150	218 704 83
RGL70/2-A	ZM-1LN	CE-0085AQ0723 5G519/05M	DN 65	218 705 43
			DN 80	218 705 53
			DN 100	218 705 63
			DN 125	218 705 73
			DN 150	218 705 83

Gas valve train sizing

Size 50, version 1LN

Type 50/1-B, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)					High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)						
	Nominal valve-train diameter					Nominal valve-train diameter						
	1½"	2"	65	80	100	125	1½"	2"	65	80	100	125
	Nominal diameter of gas butterfly					Nominal diameter of gas butterfly						
	65	65	65	65	65	65	65	65	65	65	65	65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2100	172	67	40	30	24	23	94	37	26	22	20	19
2300	205	79	47	34	28	26	112	44	30	25	22	22
2500	241	92	54	39	31	29	132	51	34	29	26	25
2700	280	106	62	45	36	33	-	59	40	34	30	29
2900	-	122	71	51	41	37	-	68	45	39	34	33
3100	-	139	81	58	46	42	-	77	52	44	39	37
3400	-	167	97	70	55	50	-	93	62	53	47	45

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2100	246	93	54	39	31	29	134	51	34	29	25	24
2300	293	110	63	45	35	32	-	60	39	33	29	28
2500	-	128	73	52	40	36	-	69	45	38	33	32
2700	-	148	83	59	45	41	-	80	52	43	37	36
2900	-	169	95	66	51	46	-	91	59	49	42	40
3100	-	192	107	74	57	51	-	103	66	55	47	45
3400	-	229	127	88	67	60	-	123	78	65	56	53

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³												
2100	82	39	28	24	22	21	49	26	21	19	18	18
2300	97	46	32	27	25	24	58	30	24	22	21	21
2500	114	53	37	31	28	27	67	34	28	25	24	24
2700	132	60	42	35	32	30	78	40	32	29	28	27
2900	151	69	48	40	36	34	90	45	36	33	32	31
3100	172	79	55	45	40	39	103	52	41	38	36	35
3400	207	94	66	54	48	46	124	63	50	46	43	43

Type 50/2-A, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)					High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)								
	Nominal valve-train diameter					Nominal valve-train diameter								
	1½"	2"	65	80	100	125	150	1½"	2"	65	80	100	125	150
	Nominal diameter of gas butterfly					Nominal diameter of gas butterfly								
	80	80	80	80	80	80	80	80	80	80	80	80	80	80

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³														
2500	239	90	52	37	30	27	26	130	49	32	27	24	23	23
2800	-	113	66	48	38	34	33	-	63	42	35	31	30	30
3100	-	138	80	57	45	41	40	-	77	51	43	38	36	36
3400	-	164	94	67	53	48	46	-	91	60	51	44	42	42
3800	-	201	114	80	62	56	53	-	110	71	60	52	50	49
4200	-	240	134	92	70	63	59	-	129	82	68	58	56	55
4600	-	282	154	104	77	69	65	-	-	93	76	64	61	60
4900	-	-	169	113	83	73	68	-	-	100	81	68	64	63

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³														
2500	-	125	70	49	37	34	32	-	67	43	35	30	29	28
2800	-	157	88	62	47	43	40	-	85	54	45	39	37	37
3100	-	192	107	74	57	51	48	-	103	66	55	47	45	44
3400	-	229	127	87	66	59	56	-	123	78	64	55	53	52
3800	-	281	154	105	79	70	66	-	-	94	77	65	62	61
4200	-	-	183	123	91	81	76	-	-	110	89	75	71	70
4600	-	-	214	142	103	90	85	-	-	127	102	85	80	78
4900	-	-	238	156	112	98	91	-	-	139	111	91	86	84

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³														
2500	109	48	33	27	24	23	22	63	30	23	21	20	19	19
2800	143	66	47	39	35	34	33	86	44	36	33	31	31	31
3100	178	84	60	51	46	44	44	108	57	47	44	41	41	41
3400	214	101	73	61	55	54	53	131	70	57	53	51	50	50
3800	265	124	88	74	66	64	63	-	85	69	64	61	60	60
4200	-	145	101	84	75	72	71	-	98	79	73	69	68	67
4600	-	166	113	93	82	78	77	-	110	87	80	75	73	73
4900	-	181	121	98	85	81	80	-	117	91	83	78	76	76

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 70, version 1LN

Type 70/1-B, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
4600	135 85 58 50 46	74 57 45 42 41
5000	156 97 66 56 51	85 64 51 47 45
5400	180 111 75 63 57	97 73 57 53 51
5800	206 127 84 71 64	111 83 65 60 58
6200	234 144 95 80 73	126 94 73 67 65
6600	265 163 107 90 82	142 107 83 76 74
7000	298 183 121 101 92	160 120 93 86 83
7300	- 199 131 110 100	174 131 102 94 91

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
4600	188 116 77 65 59	101 76 59 54 53
5000	219 134 88 73 66	116 87 66 61 59
5400	253 153 100 83 75	133 99 76 69 67
5800	290 175 113 94 84	152 113 86 79 76
6200	- 199 128 106 96	174 128 97 89 86
6600	- 225 145 120 108	197 145 110 101 98
7000	- 254 163 135 121	- 164 125 114 110
7300	- 276 178 147 132	- 179 136 124 120

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³		
4600	85 64 53 50 48	58 51 46 45 45
5000	97 73 60 56 54	66 58 52 51 50
5400	111 83 68 63 61	76 66 59 58 57
5800	127 94 77 71 69	86 75 67 65 64
6200	144 107 87 80 77	98 85 76 74 73
6600	162 120 97 90 87	110 96 86 83 82
7000	182 135 109 101 97	124 108 96 93 92
7300	198 146 119 110 106	135 117 105 102 101

Type 70/2-A, version 1LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e, \max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
5300	153 87 51 40 34	72 50 34 30 28
5900	188 106 62 48 41	89 61 42 36 35
6500	227 128 74 57 49	107 73 50 44 41
7100	269 151 87 67 58	128 87 59 52 49
7700	- 177 102 78 67	150 102 69 60 57
8300	- 205 118 90 77	174 118 80 70 66
8900	- 235 135 103 88	200 135 92 80 76
9500	- 267 153 116 99	- 154 104 91 86
10000	- 296 169 129 110	- 171 115 100 95

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
5300	215 119 67 51 43	100 67 44 38 36
5900	266 148 84 63 54	124 83 55 48 45
6500	- 179 101 77 65	151 101 67 58 55
7100	- 213 120 91 77	180 121 80 70 66
7700	- 250 141 106 90	- 142 94 82 77
8300	- 290 163 123 104	- 165 109 94 89
8900	- 186 140 119	- 189 125 108 102
9500	- 211 159 134	- 142 122 115
10000	- 233 175 147	- 157 135 127

LPG (F) $H_i = 25.89$ kWh/mn ³ ; $d = 1.555$; $W_i = 20.762$ kWh/mn ³		
5300	75 48 33 29 27	41 31 25 23 23
5900	92 59 41 35 32	50 39 31 29 28
6500	111 71 49 42 39	61 47 37 35 34
7100	132 84 58 49 45	73 56 44 41 40
7700	155 98 67 57 53	85 66 52 48 47
8300	179 113 77 66 60	99 76 60 56 54
8900	205 129 88 75 69	113 87 69 64 62
9500	233 146 99 84 77	128 98 78 72 70
10000	257 161 109 93 85	142 109 86 80 78

Stated pressures for LPG are based on propane, but may also be used for butane.

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery

Sizes 50 and 70, version 1LN

Scope of delivery	RGL50	RGL70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, nozzle assembly with oil nozzle(s), combustion manager with control unit, flame sensor stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●
W-FM 100 combustion manager	●	●
Double gas solenoid valve (Class A)	●	●
Gas butterfly valve	●	●
Pilot line	●	●
Air-pressure switch	●	●
Oil-pressure switch in return	●	●
Low-gas-pressure switch	●	●
Mixing assembly with adjustable regulating sleeve	●	-
Mixing assembly with adjustable flame tube	-	●
Stepping motor for compound regulation of gas and air with W-FM 100		
Stepping motor for air regulator	●	●
Stepping motor for gas butterfly valve	●	●
Stepping motor for oil regulator	●	●
Oil pump, fitted	●	●
Oil hoses	●	●
2 oil solenoid valves, 1 safety valve, two-stage nozzle assembly with shut-off device (solenoid)	●	●
Electromagnetic clutch	●	●
Special equipment		
Downward-firing version	○	○
Air-inlet flange for duct connection	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post-purge	○	○
Combustion-head extension	○	○
Integral capacity controller for W-FM 100	○	○
Variable speed drive	○	○
O ₂ trim	○	○
W-FM supplied loose for mounting in a control panel	○	○
Bus interface	○	○
TRD 24 h/72 h execution	○	○
High-gas-pressure switch	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.


Technical data

Sizes 50 and 70, version 1LN

Technical data				RGL50/1-B		RGL50/2-A				
400 V, 3 ~ burner motor ¹⁾		Type		W-D132/170-2/9K0		W-D132/210-2/14K0				
Nominal rating		kW		9		14				
Current draw at 400 V		A		18		28				
Motor pre-fusing (ΥΔ motor start)		A (slow)		35		50				
Speed (50 Hz)		rpm		2920		2920				
Fan wheel		Colour		blue		blue				
		ø		345 x 100		268 x 100				
Combustion manager		Type		W-FM 100		W-FM 100				
Ignition unit		Type		W-ZG02		W-ZG02				
Stepping motor	Air	Type		SQM45		SQM45				
	Fuel	Type		SQM45		SQM45				
Integral pump		Type		TA4C		T2C				
Oil solenoid valves	115 V, 3/8" (supply)	20 W	Type	321 H 2322		321 H 2322				
	115 V, 3/8" (return)	20 W	Type	121 G 2320		121 G 2320				
Oil pressure switch	1 – 10 bar (return - 5 bar)		Type	DSA 46 F001		DSA 46 F001				
Oil hoses		DN / length		25 / 1300		25 / 1300				
Burner weight		kg (approx.)		230		230				
Weight (DMV and fittings)		R / DN		1½ 2		65	80	100	125	150
		kg (approx.)		23 25		65	80	130	220	240


Technical data				RGL70/1-B		RGL70/2-A				
400 V, 3 ~ burner motor ¹⁾		Type		W-D160/240-2/18K0		W-D160/240-2/22K0				
Nominal rating		kW		18		22				
Current draw at 400 V		A		34.5		43				
Motor pre-fusing (ΥΔ motor start)		A (slow)		63		63				
Speed (50 Hz)		rpm		2940		2940				
Fan wheel		Colour		blue		blue				
		ø		590 x 160		590 x 160				
Combustion manager		Type		W-FM 100		W-FM 100				
Ignition unit		Type		W-ZG02		W-ZG02				
Stepping motor	Air	Type		SQM48		SQM48				
	Fuel	Type		SQM45		SQM45				
Integral pump		Type		T2C (< 600 kg/h)		T2C (< 600 kg/h)				
				T3C (> 600 kg/h)		T3C (> 600 kg/h)				
Oil solenoid valves	115 V, 3/8" (supply)	20 W	Type	321 H 2522		321 H 2522				
	115 V, 3/8" (return)	20 W	Type	121 G 2520		121 G 2520				
Oil-pressure switch	2 – 40 bar (supply - 18 bar)		Type	–		–				
	1 – 10 bar (return - 5 bar)		Type	DSA 46 F 001		DSA 46 F 001				
Oil hoses		DN / length		25 / 1300		25 / 1300				
Burner weight		kg (approx.)		430		430				
Weight (DMV and fittings)		DN		65 80		100	125	150		
		kg (approx.)		65 80		130	220	240		

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

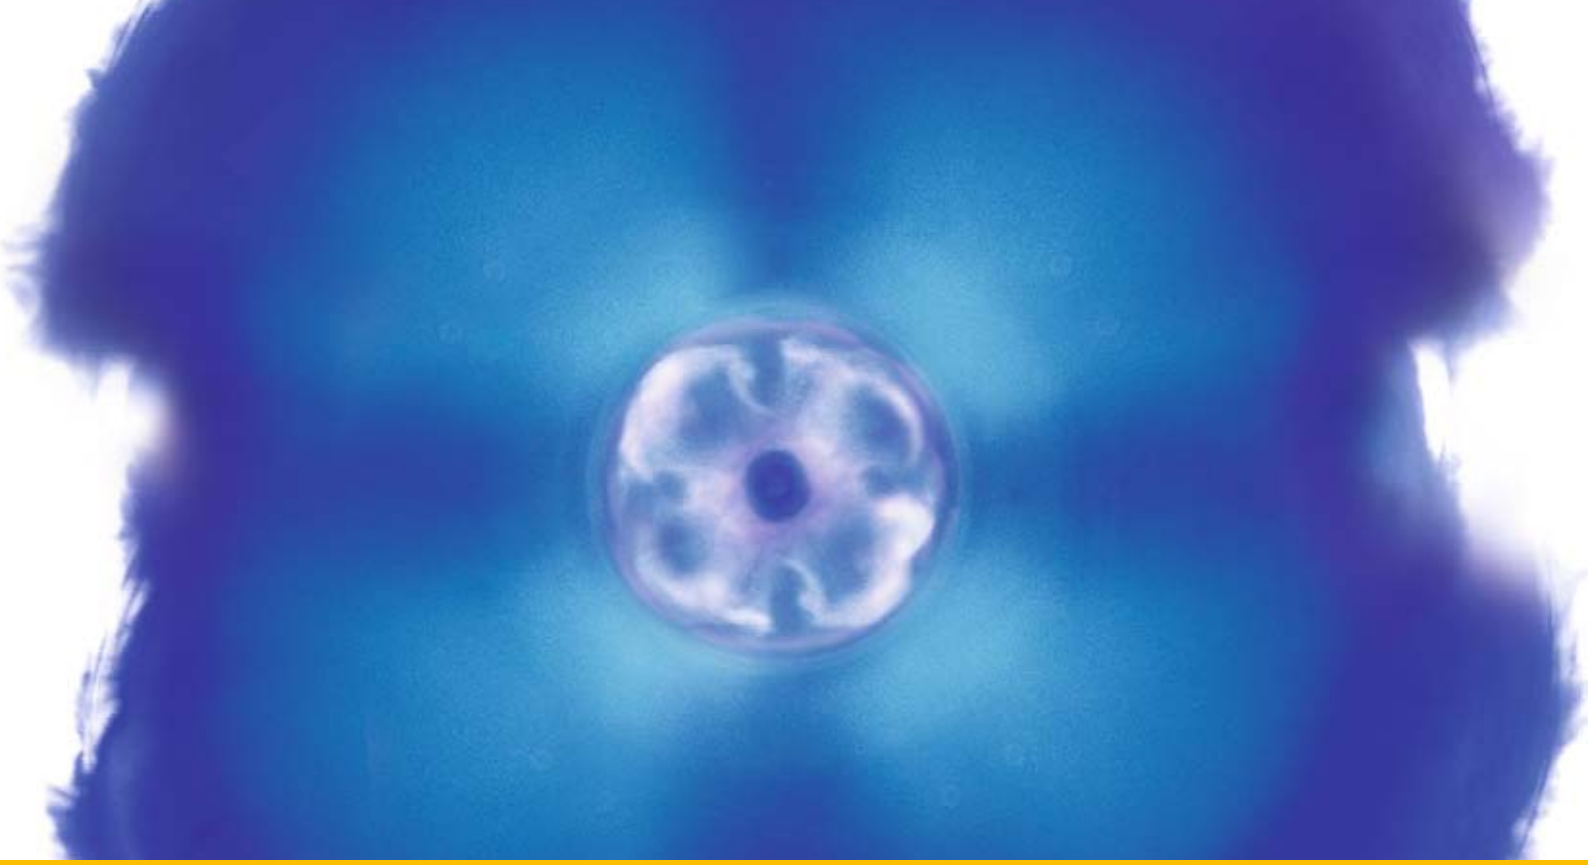


– weishaupt –

multiflam[®] burners

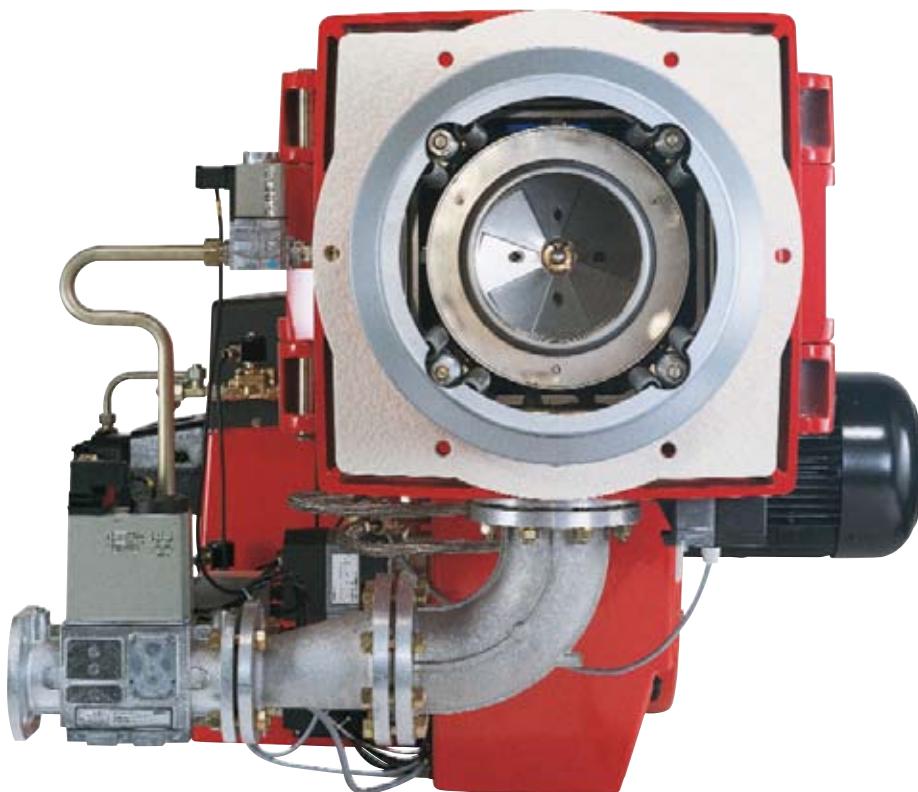

The multiflam[®] principle: Reduced emissions as standard

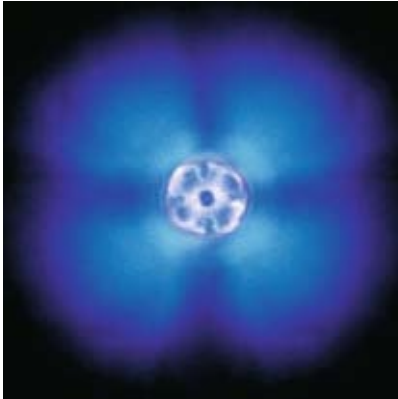


A multiflam[®] flame showing efficient combustion


When Weishaupt introduced its multiflam[®] technology in 1998 it made history, astounding the industry with its unprecedentedly low emissions. Using a patented mixing assembly design, Weishaupt was able to reduce the NO_x emissions from large and medium-sized burners to levels that hitherto had only ever been associated with compact burners. Weishaupt set an all-new benchmark, achieving levels below 80 mg/kWh on gas and 1200 mg/kWh on oil, subject to the combustion-chamber geometry.

Weishaupt's multiflam[®] burners meet the world's toughest standards. In those countries with particularly stringent environmental legislation, such as Switzerland, multiflam[®] industrial burners are market-sector leaders.

At the heart of Weishaupt's multiflam[®] technology is a special mixing-assembly design which distributes the fuel among primary and secondary nozzles. This results in extremely efficient combustion thanks to recirculation of the flue gases directly at the mixing assembly.

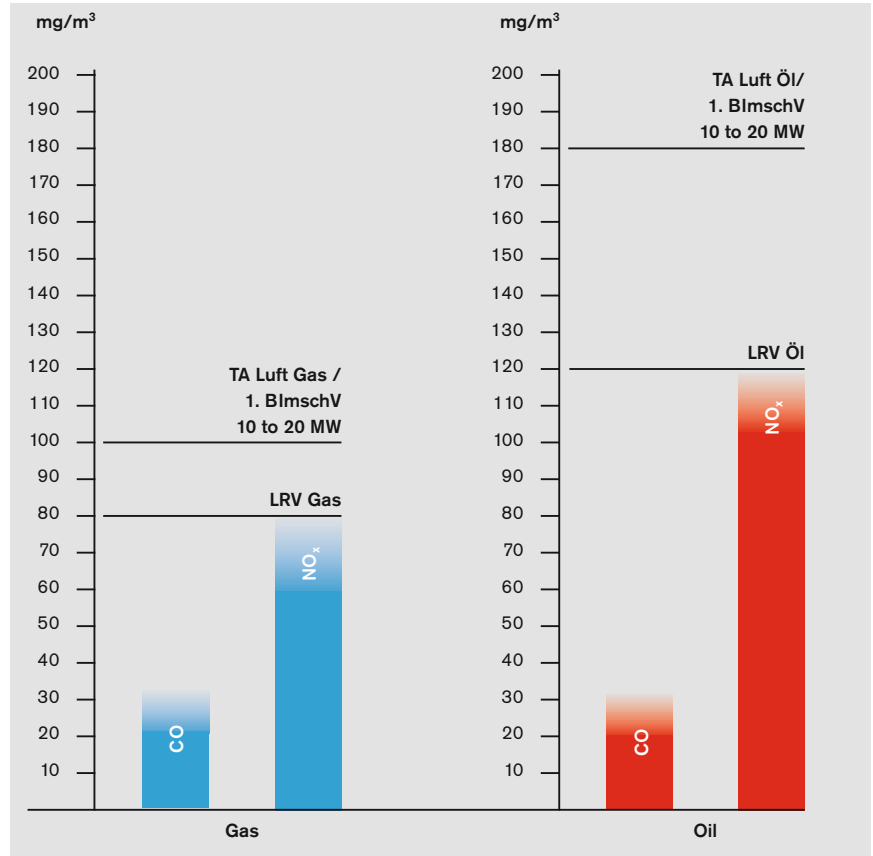

Typical emission levels for hot-water plant (subject to combustion-chamber design)



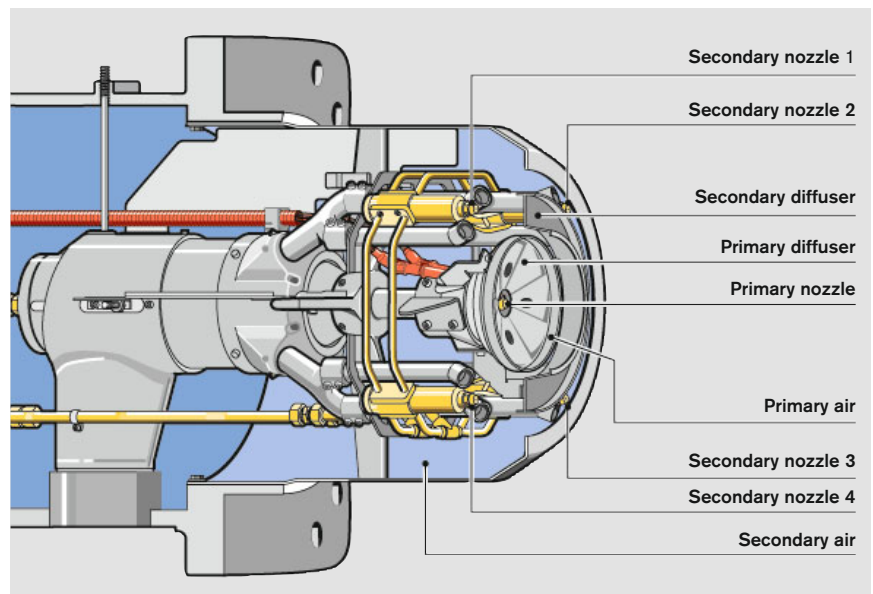


Cut-away illustration of the mixing assembly

Oil burner selection

Sizes 30 to 50, version 3LN – multiflam[®]

Mixing assembly for ultra-low-NO_x applications (NO_x Class 3)

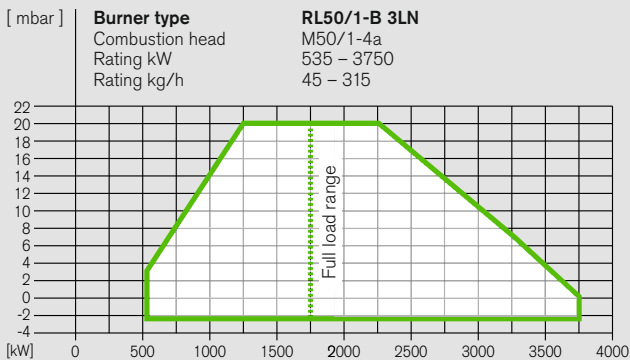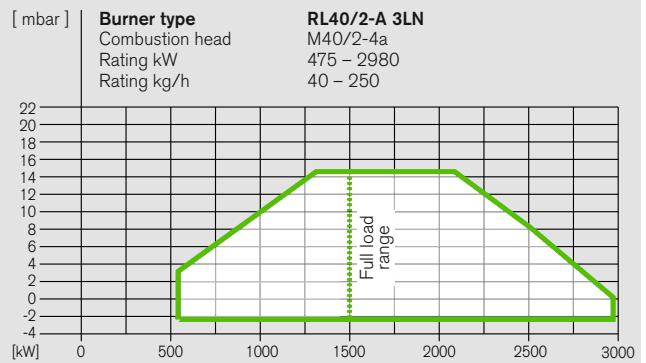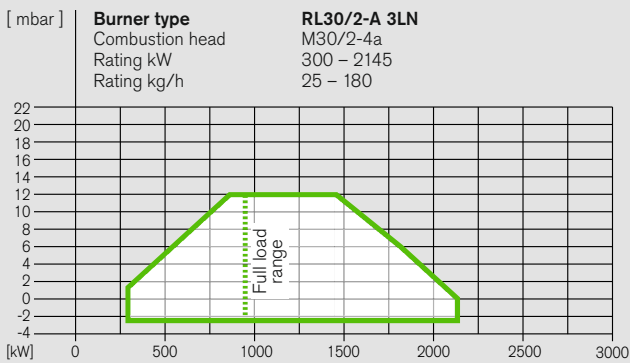

Burner type	Version	DIN-CERTCO	Order No.
RL30/2-A	3LN	5G 332/09	211 305 24
RL40/2-A	3LN	5G 789/07	211 405 24
RL50/1-B	3LN	5G 790/07	211 504 24

Stated oil throughputs are based on a calorific value of 11.91 kWh/kg for fuel oil EL.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation altitude of 500 m above sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Fuels

Fuel oil EL —

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Scope of delivery, technical data

Sizes 30 to 50, version 3LN – multiflam®

Scope of delivery	RL30	RL40	RL50
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, combustion manager with control unit, UV flame sensor, stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●
W-FM 100 combustion manager	●	●	●
Oil-pressure switch in return	●	●	●
Oil pump, fitted	●	●	●
Oil hoses	●	●	●

Special equipment	RL30	RL40	RL50
Air-inlet flange for duct connection	○	○	○
Combustion-head extension	○	○	○
Variable speed drive	○	○	○
O ₂ trim	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○
Bus interface	○	○	○

- Standard
- Optional





Please enquire or see the price list for additional special equipment.

Technical data		RL30/2-A 3LN	RL40/2-A 3LN	RL50/1-B 3LN
380 V (400 V), 3 ~ burner motor ¹⁾	Type	W-D112/140-2/4K5	W-D112/170-2/7K0	W-D132/170-2/9K0
Nominal rating	kW	4.5	7	9
Current draw at 380 V (400 V)	A	9.1	15	18
Motor pre-fusing (YΔ motor start)	A	16	25	35
Speed (50 Hz)	rpm	2900	2900	2920
Fan wheel	Colour ø	blue 268 x 104	blue 295 x 104	blue 345 x 104,5
Combustion manager	Type	W-FM 100 / 200	W-FM 100 / 200	W-FM 100 / 200
Ignition unit	Type	W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type SQM45	SQM45	SQM45
	Fuel	Type SQM45	SQM45	SQM45
	Mixing assembly	Type SQM48	SQM48	SQM48
Integral pump	Type	TA2C	TA3C	TA4C
Oil solenoid valves	115 V, 1/4" (supply)	20 W Type 121 K 6220 (x 2)	321 H 2322 (x 2)	321 H 2322 (x 2)
	115 V, 1/4" (return)	20 W Type 121 K 6220 (x 2)	121 G 2320 (x 2)	121 G 2320 (x 2)
Oil-pressure switch	1 – 10 bar (return, fuel oil EL - 5 bar)	Type DSA 46 F001	DSA 46 F001	DSA 46 F001
Oil hoses	DN / length	20 / 1000	20 / 1000	25 / 1300
Burner weight	kg (approx.)	100	142	208

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

Gas burner selection

Sizes 30 to 50, version 3LN – multiflam®

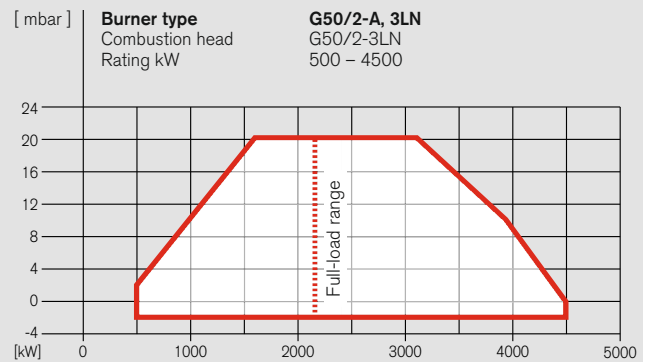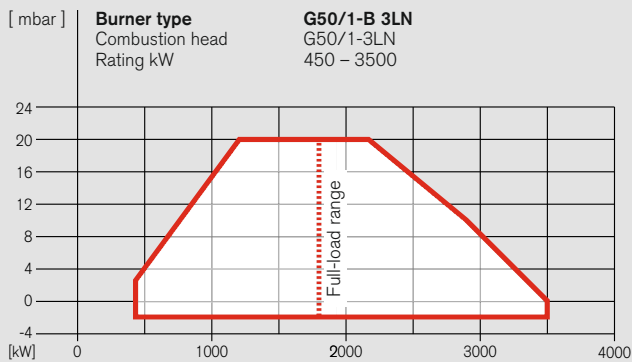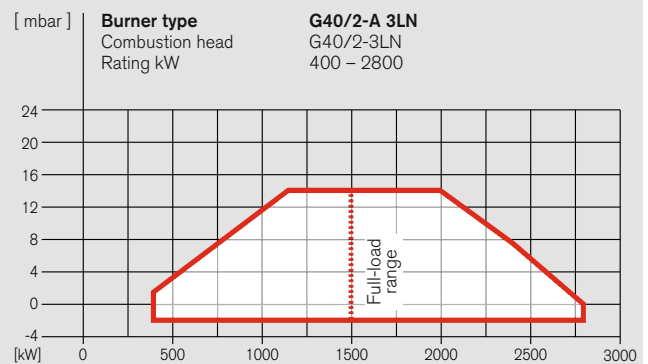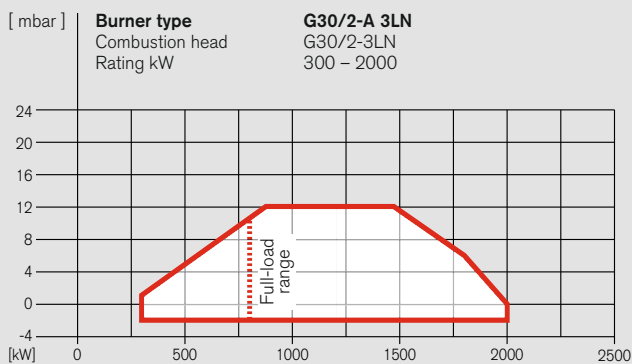

Burner type	Version	CE-PIN	DMV size	Order No.
G30/2-A	3LN	CE 0085 AP 0528	R 1½	217 305 08
			R 2	217 305 09
			DN 65	217 305 44
			DN 80	217 305 54
			DN 100	217 305 64
G40/2-A	3LN	CE 0085 AQ 0720	R 1½	217 405 10
			R 2	217 405 11
			DN 65	217 405 44
			DN 80	217 405 54
			DN 100	217 405 64
G50/1-B	3LN	CE 0085 AQ 0721	R 1½	217 504 10
			R 2	217 504 11
			DN 65	217 504 44
			DN 80	217 504 54
			DN 100	217 504 64
G50/2-A	3LN	CE 0085 AQ 0721	R 2	217 505 11
			DN 65	217 505 44
			DN 80	217 505 54
			DN 100	217 505 64
			DN 125	217 505 74
G50/2-A	3LN	CE 0085 AQ 0721	R 2	217 505 11
			DN 65	217 505 44
			DN 80	217 505 54
			DN 100	217 505 64
			DN 125	217 505 74
G50/2-A	3LN	CE 0085 AQ 0721	R 2	217 505 11
			DN 65	217 505 44
			DN 80	217 505 54
			DN 100	217 505 64
			DN 150	217 505 84

Fuels

Natural gas

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltages and frequencies:





The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Gas burner selection

Sizes 60 and 70, version 3LN – multiflam[®]

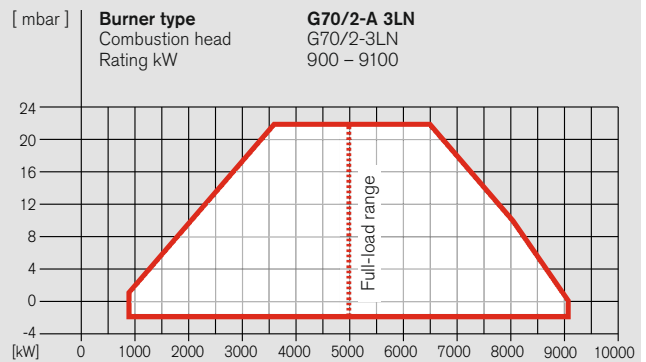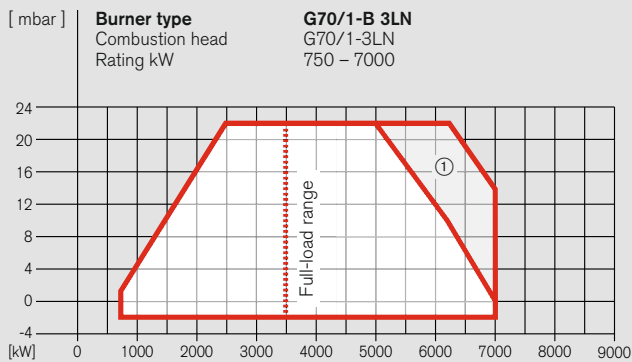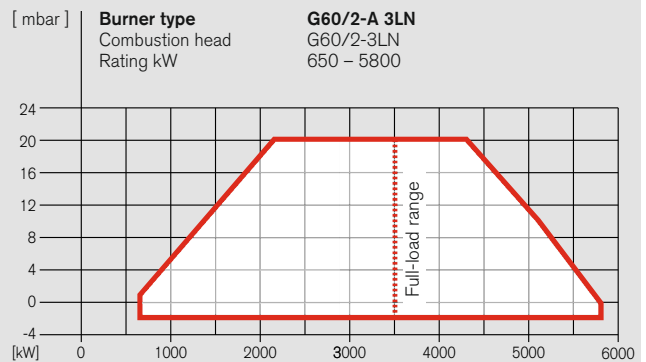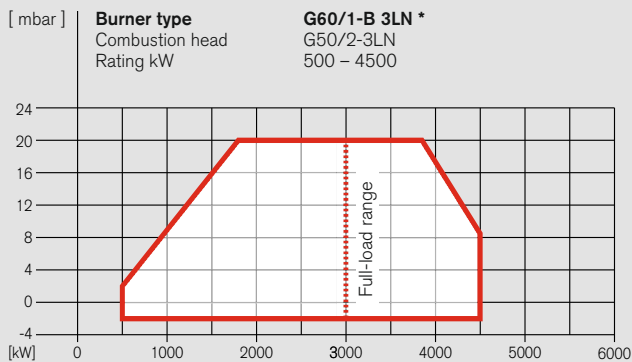

① 55 Hz version with VSD (additional cost)

Fuels

Natural gas

Voltages and frequencies:

The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

* Note regarding G60/1-B 3LN

The burner is equipped with VSD as standard. Its high-capacity fan wheel is driven by an IP 55 Weishaupt motor operating at 55 Hz when at full speed.

The burner is supplied with a W-FM 200 combustion manager as standard, and the burner price includes an FC301 P11K frequency converter (IP 20 protection), and a braking resistor suitable for 55 Hz operation (supplied loose for mounting in a control panel).

Burner type	Version	CE-PIN	DMV size	Order No.	
G60/1-B	3LN *	CE 0085 AQ 0722	R	2"	217 604 14
			DN	65	217 604 44
			DN	80	217 604 54
			DN	100	217 604 64
			DN	125	217 604 74
DN	150	217 604 84			
G60/2-A	3LN	CE 0085 AQ 0722	DN	65	217 605 44
			DN	80	217 605 54
			DN	100	217 605 64
			DN	125	217 605 74
			DN	150	217 605 84
G70/1-B	3LN	CE 0085 AQ 0723	DN	65	217 704 44
			DN	80	217 704 54
			DN	100	217 704 64
			DN	125	217 704 74
			DN	150	217 704 84
G70/2-A	3LN	CE 0085 AQ 0723	DN	65	217 705 44
			DN	80	217 705 54
			DN	100	217 705 64
			DN	125	217 705 74
			DN	150	217 705 84

Gas valve train sizing

Sizes 30 and 40, version 3LN – multiflam®

Type G30/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	50 50 50 50 50 50	50 50 50 50 50 50

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
800	32 16 13 11 10 10
1000	48 25 19 16 15 15
1200	68 34 25 22 20 19
1400	91 44 32 27 25 24
1600	116 55 40 34 30 29
1800	145 67 48 40 36 35
2000	176 81 57 47 42 41

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
800	43 21 15 13 12 12
1000	66 32 23 19 18 17
1200	94 44 31 26 23 23
1400	125 57 40 34 30 29
1600	162 73 50 42 37 35
1800	202 90 62 51 45 43
2000	- 109 74 60 53 50

Type G40/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	65 65 65 65 65 65	65 65 65 65 65 65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
1500	93 39 26 20 17 17
1700	116 47 30 23 19 18
1900	142 56 35 26 21 20
2100	172 67 40 30 24 23
2300	205 79 47 34 28 26
2500	241 92 54 39 31 29
2700	280 106 62 45 36 33
2800	- 114 67 48 38 35

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
1500	131 53 33 26 21 20
1700	165 65 39 30 24 23
1900	203 78 46 34 27 25
2100	246 93 54 39 31 29
2300	293 110 63 45 35 32
2500	- 128 73 52 40 36
2700	- 148 83 59 45 41
2800	- 158 89 62 48 43

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Gas burners size 50, version 3LN

G50/1-B 3LN												
Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)					High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)						
	Nominal valve-train diameter 1½" 2" 65 80 100 125					Nominal valve-train diameter 1½" 2" 65 80 100 125						
	Nominal diameter of gas butterfly					Nominal diameter of gas butterfly						
	65	65	65	65	65	65	65	65	65	65		
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2200	188	73	43	32	26	24	103	40	28	24	21	20
2400	222	85	50	37	29	27	122	47	32	27	24	23
2600	260	99	58	42	34	31	-	55	37	31	28	27
2800	-	114	67	48	38	35	-	63	42	36	32	31
3000	-	130	76	55	43	40	-	72	48	41	36	35
3500	-	177	103	74	58	53	-	99	66	56	50	48
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2200	269	101	59	42	33	30	-	55	37	31	27	26
2400	-	119	68	48	38	34	-	65	42	36	31	30
2600	-	138	78	55	43	39	-	75	48	40	35	34
2800	-	158	89	62	48	43	-	85	55	46	40	38
3000	-	180	101	70	54	48	-	97	62	52	45	43
3500	-	242	135	93	70	63	-	130	83	68	59	56

G50/2-A 3LN												
Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)					High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)						
	Nominal valve-train diameter 2" 65 80 100 125 150					Nominal valve-train diameter 2" 65 80 100 125 150						
	Nominal diameter of gas butterfly					Nominal diameter of gas butterfly						
	80	80	80	80	80	80	80	80	80	80	80	80
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
2200	79	50	39	33	31	30	47	34	30	28	27	27
2500	98	60	46	38	35	34	57	41	36	32	31	31
2800	119	72	53	43	40	39	68	48	41	37	36	35
3100	142	84	62	50	46	44	81	55	48	42	41	40
3400	168	98	71	56	52	49	94	64	54	48	46	45
3700	196	113	81	63	58	55	109	73	61	54	52	51
4100	236	134	95	74	67	64	130	86	72	63	60	59
4500	281	158	111	85	77	73	154	100	83	72	69	68
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
2200	108	66	49	40	38	36	63	44	38	34	33	33
2500	135	80	59	47	43	42	76	52	45	40	39	38
2800	164	95	69	54	50	48	92	61	52	46	44	44
3100	197	113	80	62	57	54	109	72	60	53	50	50
3400	233	131	92	71	64	61	127	83	69	60	57	56
3700	272	152	105	80	72	68	147	94	78	67	64	63
4100	-	181	124	93	83	79	177	112	92	78	75	73
4500	-	214	145	108	96	90	-	130	106	90	86	84

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Sizes 60 and 70, version 3LN – multiflam[®]

G60/1-B 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
3100	145 86 64 52 48 46	83 57 50 44 43 42
3300	161 95 70 56 52 49	92 63 54 48 46 46
3600	188 110 79 63 58 55	106 71 61 54 52 51
3900	217 125 90 70 64 61	121 81 69 60 58 57
4200	249 142 101 79 72 68	138 91 77 67 64 64
4500	283 161 113 87 79 75	156 102 86 75 72 70
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
3100	199 114 81 64 58 55	110 73 62 54 52 51
3300	222 126 89 69 63 60	122 80 67 59 56 55
3600	260 146 102 78 71 67	142 92 77 66 64 62
3900	- 168 116 88 79 75	163 105 87 75 71 70
4200	- 192 132 99 89 84	187 118 98 83 80 78
4500	- 217 148 111 99 93	- 133 109 93 89 87

G70/1-B 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
3500	87 58 43 38 36	51 41 34 32 32
4000	111 73 53 46 43	64 51 42 40 39
4500	137 90 64 56 52	79 63 51 48 47
5000	167 108 76 66 62	95 75 61 57 56
5500	199 128 89 77 72	113 88 72 67 65
6000	233 149 103 89 82	131 102 82 77 75
6500	270 171 117 100 92	151 117 93 87 85
7000	- 194 131 112 103	171 131 104 97 94
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
3500	117 76 53 46 43	66 51 42 39 38
4000	152 98 68 59 54	85 67 54 50 49
4500	191 122 85 73 67	107 83 67 63 61
5000	234 148 102 88 81	131 101 81 76 74
5500	280 177 121 103 95	156 120 96 89 87
6000	- 206 140 119 109	182 140 111 103 100
6500	- 236 159 134 122	- 159 125 115 112
7000	- 267 177 148 135	- 177 138 127 123

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

G60/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 2" 65 80 100 125 150	Nominal valve-train diameter 2" 65 80 100 125 150
	Nominal diameter of gas butterfly 100 100 100 100 100	Nominal diameter of gas butterfly 100 100 100 100 100
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
3500	160 85 57 41 36 34	82 49 39 32 31 30
4000	204 107 70 49 43 40	103 60 47 39 36 35
4300	233 121 78 55 47 44	117 68 53 43 40 39
4500	254 132 84 59 50 47	127 73 57 46 43 42
4800	287 148 94 65 56 51	143 82 63 51 47 46
5000	- 160 101 69 59 55	155 88 68 54 50 49
5300	- 178 112 76 65 60	172 98 75 59 55 54
5500	- 191 120 81 69 63	185 105 80 63 59 57
5800	- 211 132 89 76 69	- 115 88 69 64 63
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
3500	222 115 73 50 43 40	110 63 49 39 36 35
4000	287 146 92 62 53 48	141 79 61 48 44 43
4300	- 167 104 70 59 54	162 90 69 54 50 48
4500	- 182 113 76 64 58	176 98 74 58 54 52
4800	- 206 127 85 71 65	200 111 84 65 60 58
5000	- 222 137 91 77 70	- 120 90 70 65 63
5300	- 249 153 101 85 77	- 134 101 78 72 70
5500	- 268 164 109 91 83	- 144 108 84 77 75
5800	- 297 182 120 101 91	- 159 120 93 85 83

G70/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter 65 80 100 125 150	Nominal valve-train diameter 65 80 100 125 150
	Nennweite der Gasdrossel 100 100 100 100 100	Nennweite der Gasdrossel 100 100 100 100 100
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		
5000	141 83 51 41 36	92 63 43 37 35
5500	169 98 60 48 42	83 59 42 38 36
6000	200 115 70 55 49	98 69 49 44 42
6500	233 134 80 63 55	114 80 56 50 48
7000	269 154 92 72 63	131 91 64 57 54
7500	- 175 104 81 70	149 104 72 64 61
8000	- 198 116 91 79	168 117 81 72 68
9100	- 252 147 114 98	- 148 102 90 85
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
5000	195 110 64 49 42	92 63 43 37 35
5500	235 132 76 58 50	111 75 51 44 42
6000	278 156 89 68 59	132 89 60 52 50
6500	- 182 104 79 68	154 104 70 61 58
7000	- 210 120 91 78	178 121 81 71 67
7500	- 241 137 104 89	- 138 93 81 76
8000	- 273 155 118 101	- 157 105 92 87
9100	- - 200 152 129	- - 136 118 112

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar. Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery, special equipment Sizes 30 to 70, version 3LN – multiflam[®]

Scope of delivery	G30	G40	G50	G60	G70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, Combustion manager with control unit, UV flame sensor, stepping motors, flange gasket limit switch on hinged flange, fixing screws	●	●	●	●	●
W-FM 100 combustion manager	●	●	●	●	●
Double gas solenoid valve (Class A)	●	●	●	●	●
Pilot-line solenoid valve	●	●	●	●	●
Air-pressure switch	●	●	●	●	●
Low-gas-pressure switch	●	●	●	●	●
Mixing assembly with modulating diffuser	●	●	●	●	●
Stepping motor	●	●	●	●	●
Air regulator	●	●	●	●	●
Gas butterfly valve	●	●	●	●	●
Mixing assembly	●	●	●	●	●
Special equipment					
Air-inlet flange for duct connection	○	○	○	○	○
Combustion-head extension	○	○	○	○	○
Integral capacity controller for W-FM 100	○	○	○	○	○
Variable speed drive	○	○	○	○	○
O ₂ trim	○	○	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○	○	○
Bus interface	○	○	○	○	○
High-gas pressure switch	○	○	○	○	○

EN 676 stipulates that gas filters and gas-pressure switches form part of the burner supply (see Weishaupt accessories list)

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 30 to 70, version 3LN – multiflam[®]


Technical data		G30/2-A 3LN	G40/2-A 3LN	G50/1-B 3LN	G50/2-A 3LN
400 V, 3 ~ burner motor ¹⁾	Type	W-D112/140-2/4K5	W-D112/170-2/7K0	W-D132/170-2/9K0	W-D132/210-2/14K0
Nominal rating	kW	4.5	7	9	14
Current draw at 400 V	A	9.1	15	18	28
Motor pre-fusing (ΥΔ motor start)	A (slow)	16	25	35	50
Speed (50 Hz)	rpm	2900	2900	2920	2920
Fan wheel	Colour	blue	blue	blue	black
	ø	268 x 104	295 x 104	345 x 104.5	355 x 104.5
Combustion manager	Type	W-FM 100	W-FM 100	W-FM 100	W-FM100
Ignition unit	Type	W-ZG02	W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM45	SQM45	SQM45
	Fuel	Type	SQM45	SQM45	SQM45
	Mixing assembly	Type	SQM48	SQM48	SQM48
Burner weight	kg (approx.)	145	160	235	240
Weight (DMV and fittings)	R / DN	65	80	100	125
	kg (approx.)	65	80	130	220

Technical data		G60/1-B 3LN	G60/2-A 3LN	G70/1-B 3LN	G70/2-A 3LN
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/210-2/14K0	W-D132/210-2/14K0	W-D160/240-2/18K0	W-D160/240-2/22K0
Nominal rating	kW	14	14	18	22
Current draw at 400 V	A	28	28	34.5	43
Motor pre-fusing (ΥΔ motor start)	A (slow)	50	50	63	63
Speed (50 Hz)	rpm	2920	2920	2950	2940
Frequency convertor with braking resistor	Type	FC301 P11K IP 20	–	–	–
Fan wheel	Colour	blue	blue	blue	blue
	ø	515 x 127.5	515 x 127.5	590 x 160	590 x 160
Combustion manager	Type	W-FM 200	W-FM 100	W-FM 100	W-FM 100
Ignition unit	Type	W-ZG02	W-ZG02	W-ZG02	W-ZG02
Stepping motor	Air	Type	SQM45	SQM45	SQM45
	Fuel	Type	SQM45	SQM45	SQM45
	Mixing assembly	Type	SQM48	SQM48	SQM48
Burner weight	kg (approx.)	345	330	435	435
Weight (DMV and fittings)	R / DN	65	80	100	125
	kg (approx.)	65	80	130	220

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.



Dual-fuel burner selection

Sizes 30 and 40, version 3LN – multiflam®

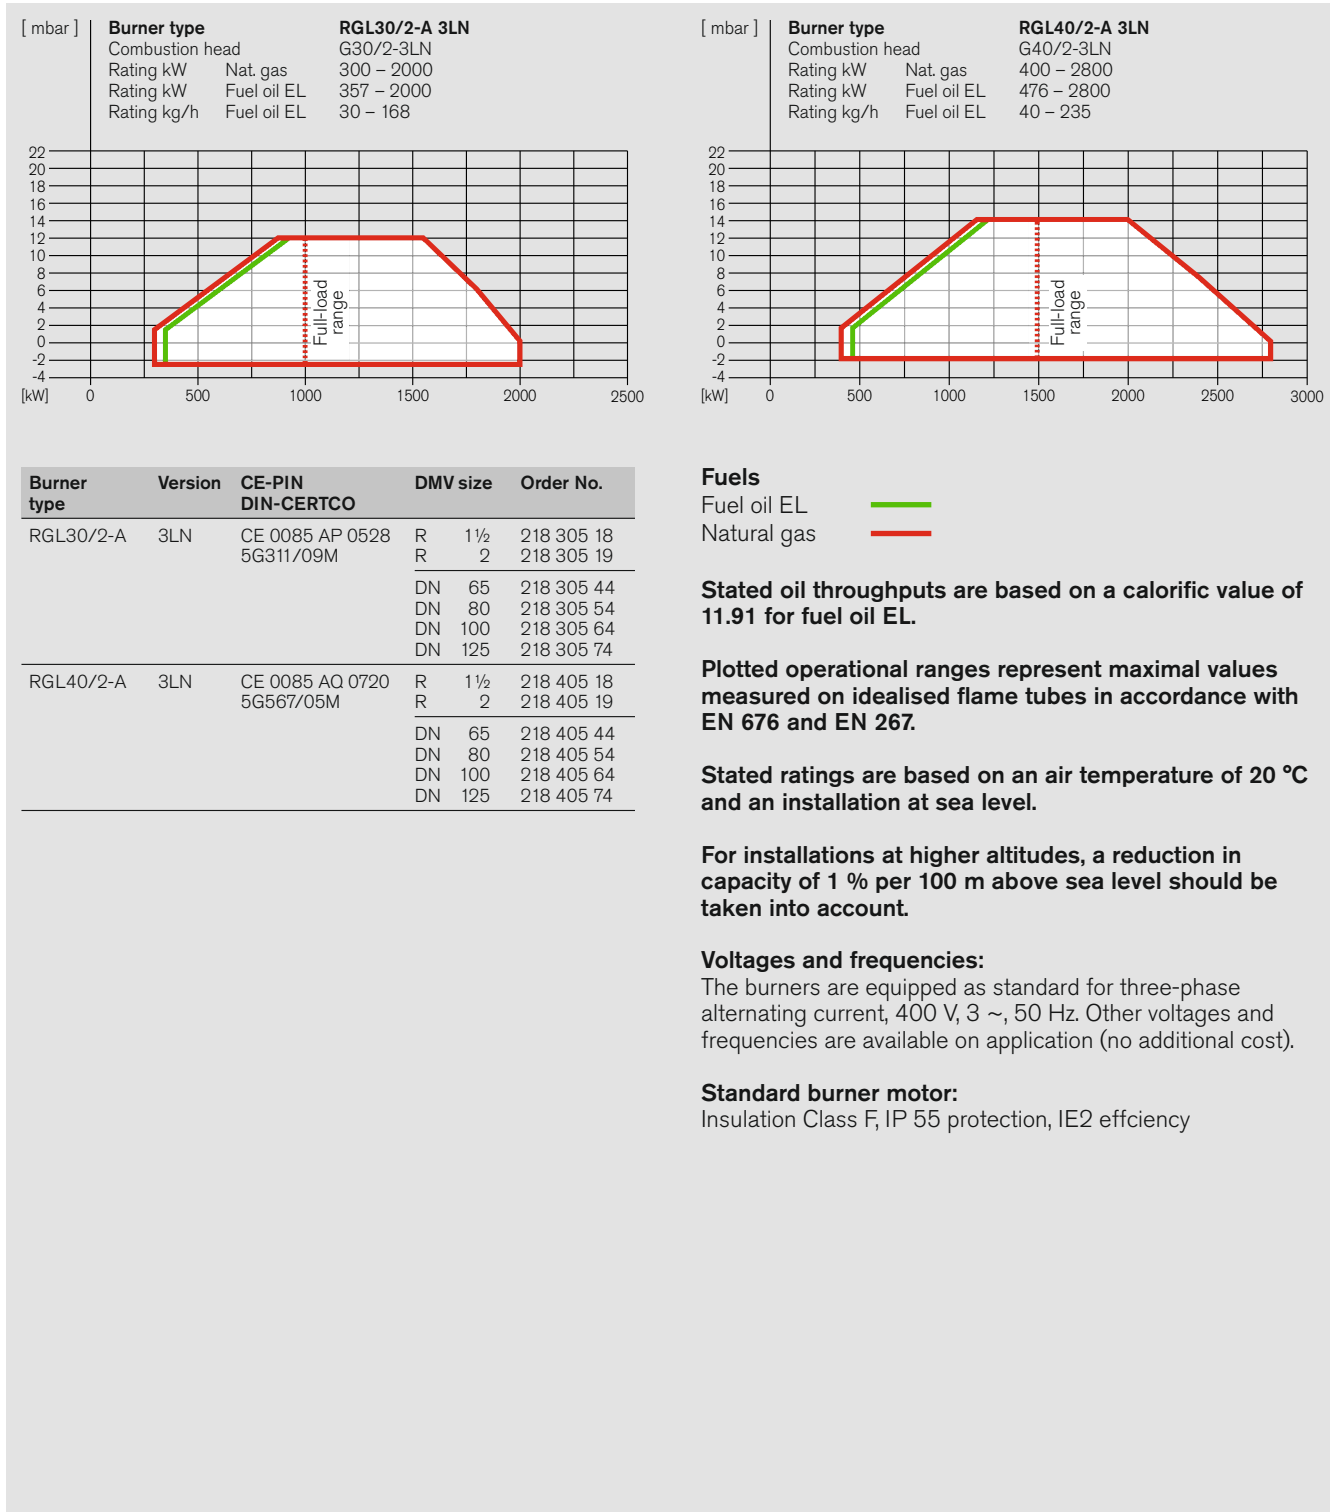

Dual-fuel burner selection

Size 50, version 3LN – multiflam®

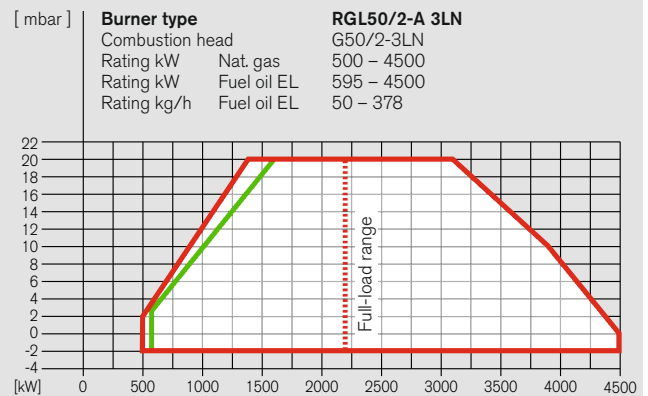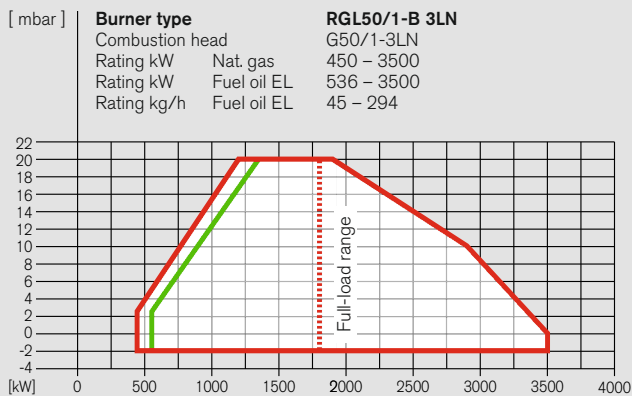

Burner type	Version	CE-PIN DIN-CERTCO	DMV size	Order No.
RGL50/1-B	3LN	CE 0085 AQ 0721 5G535/05M	R 1 1/2	218 504 18
			R 2	218 504 19
			DN 65	218 504 44
			DN 80	218 504 54
			DN 100	218 504 64
RGL50/2-A	3LN	CE 0085 AQ 0721 5G535/05M	R 2	218 505 19
			DN 65	218 505 44
			DN 80	218 505 54
			DN 100	218 505 64
			DN 125	218 505 74
			DN 150	218 505 84

Fuels

Fuel oil EL Natural gas

Stated oil throughputs are based on a calorific value of 11.91 for fuel oil EL.

Plotted operational ranges represent maximal values measured on idealised flame tubes in accordance with EN 676 and EN 267.

Stated ratings are based on an air temperature of 20 °C and an installation at sea level.

For installations at higher altitudes, a reduction in capacity of 1 % per 100 m above sea level should be taken into account.

Voltagés and frequencies:


The burners are equipped as standard for three-phase alternating current, 400 V, 3 ~, 50 Hz. Other voltages and frequencies are available on application (no additional cost).

Standard burner motor:

Insulation Class F, IP 55 protection, IE2 efficiency

Dual-fuel burner selection

Sizes 60 and 70, version 3LN – multiflam®

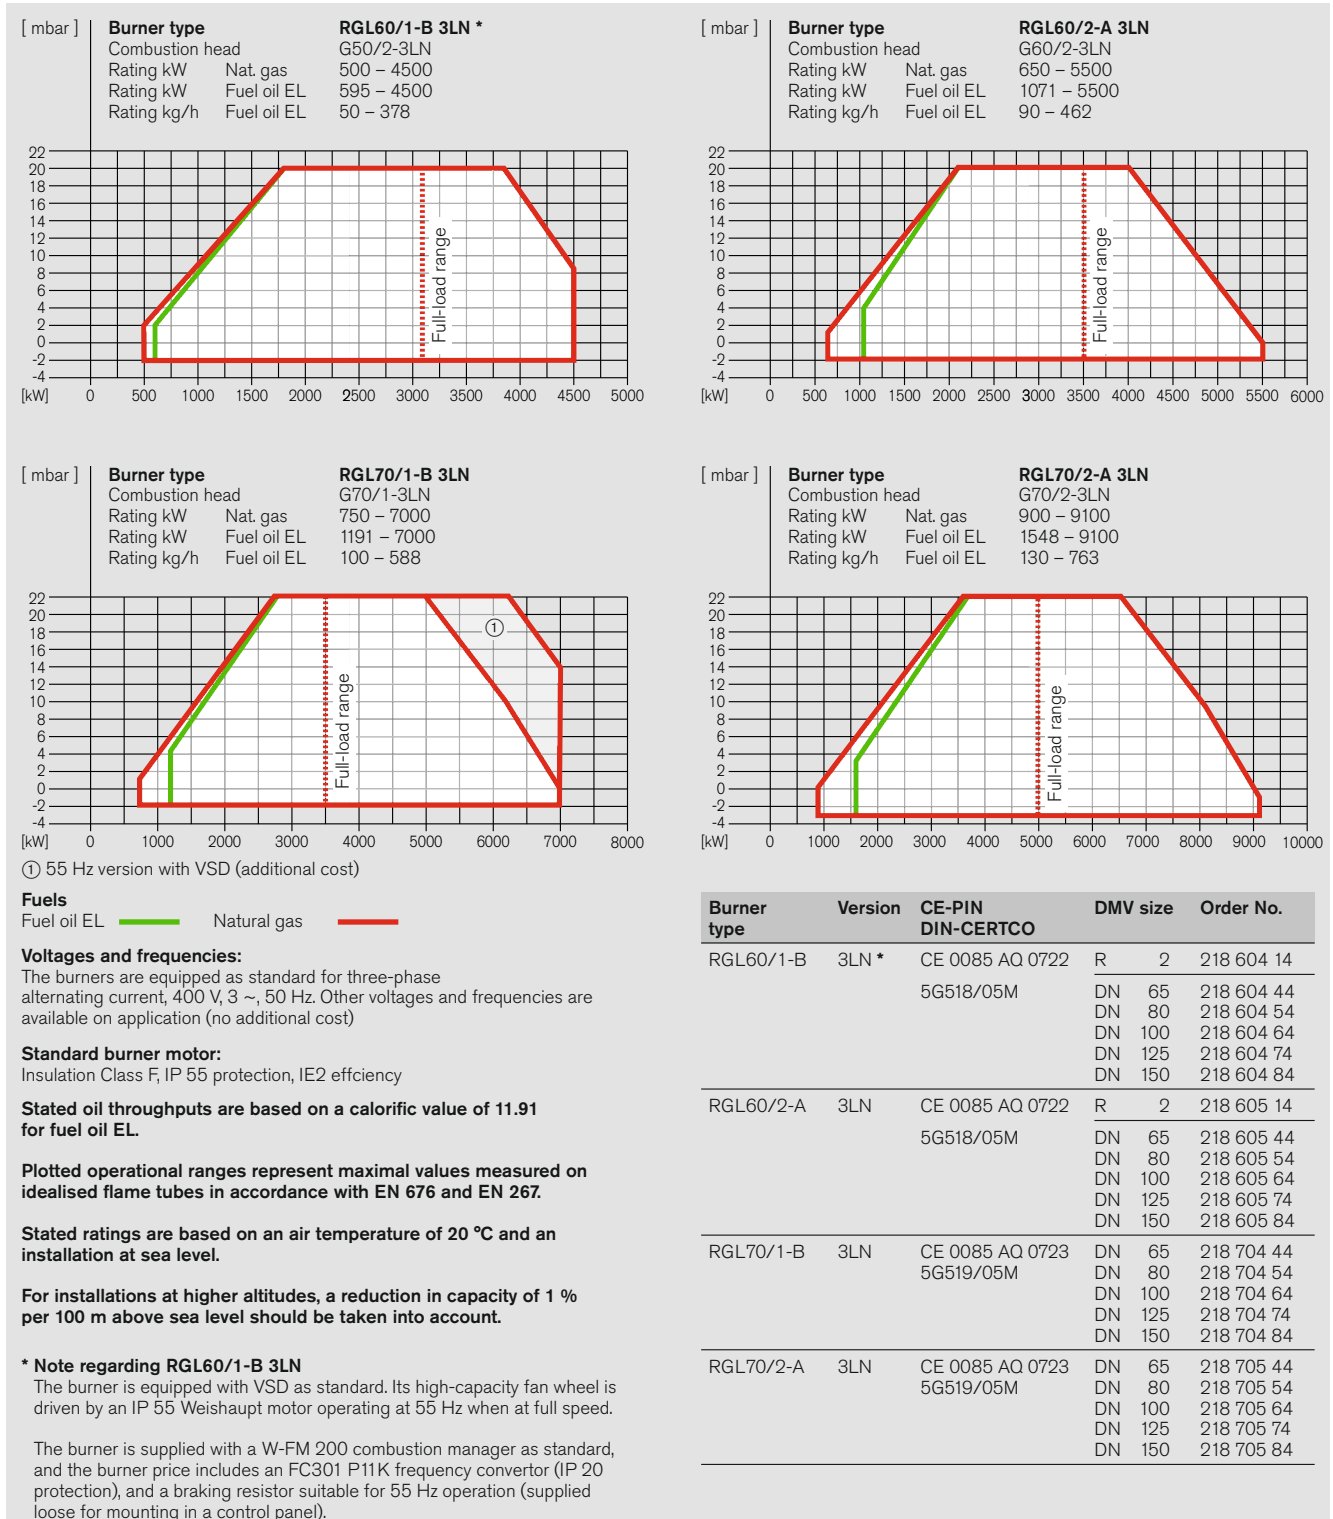

Gas valve train sizing

Sizes 30 and 40, version 3LN – multiflam®

RGL30/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	50 50 50 50 50 50	50 50 50 50 50 50

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
1000	48	25	19	16	15	15	29	16	13	12	12	12
1100	58	29	22	19	17	17	35	19	16	15	14	14
1200	68	34	25	22	20	19	41	22	19	17	17	16
1300	79	39	28	25	22	22	48	26	21	20	19	19
1400	91	44	32	27	25	24	55	29	24	23	21	21
1600	116	55	40	34	30	29	70	37	30	28	27	26
1800	145	67	48	40	36	35	87	45	36	34	32	32
2000	176	81	57	47	42	41	105	54	43	40	38	37

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
1000	66	32	23	19	18	17	39	20	16	15	14	14
1100	79	37	27	23	20	20	47	24	19	18	17	17
1200	94	44	31	26	23	23	55	28	23	21	20	20
1300	109	50	36	30	27	26	65	33	26	24	23	23
1400	125	57	40	34	30	29	74	37	30	28	26	26
1600	162	73	50	42	37	35	96	48	38	35	33	32
1800	202	90	62	51	45	43	119	59	46	42	40	39
2000	247	109	74	60	53	50	–	71	55	50	47	46

RGL40/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{e, max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	65 65 65 65 65 65	65 65 65 65 65 65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³												
1500	93	39	26	20	17	17	52	23	17	15	14	13
1700	116	47	30	23	19	18	64	27	19	17	15	15
1900	142	56	35	26	21	20	78	32	22	19	17	17
2100	172	67	40	30	24	23	94	37	26	22	20	19
2300	205	79	47	34	28	26	112	44	30	25	22	22
2500	241	92	54	39	31	29	132	51	34	29	26	25
2700	280	106	62	45	36	33	–	59	40	34	30	29
2800	–	114	67	48	38	35	–	63	42	36	32	31

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³												
1500	131	53	33	26	21	20	73	30	22	19	17	17
1700	165	65	39	30	24	23	91	36	25	22	20	19
1900	203	78	46	34	27	25	111	43	29	25	22	22
2100	246	93	54	39	31	29	134	51	34	29	25	24
2300	293	110	63	45	35	32	–	60	39	33	29	28
2500	–	128	73	52	40	36	–	69	45	38	33	32
2700	–	148	83	59	45	41	–	80	52	43	37	36
2800	–	158	89	62	48	43	–	85	55	46	40	38

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Size 50, version 3LN – multiflam[®]

RGL50/1-B 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	1½" 2" 65 80 100 125	1½" 2" 65 80 100 125
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	65 65 65 65 65 65	65 65 65 65 65 65

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
1800	129 52 32 24 20 19
2000	157 61 37 28 23 21
2200	188 73 43 32 26 24
2400	222 85 50 37 29 27
2600	- 99 58 42 34 31
2800	- 114 67 48 38 35
3000	- 130 76 55 43 40
3500	- 177 103 74 58 53

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
1800	183 71 43 32 26 24
2000	224 85 50 37 29 27
2200	- 101 59 42 33 30
2400	- 119 68 48 38 34
2600	- 138 78 55 43 39
2800	- 158 89 62 48 43
3000	- 180 101 70 54 48
3500	- 242 135 93 70 63

RGL50/2-A 3LN

Burner rating kW	Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s,max} = 300$ mbar)	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve)
	Nominal valve-train diameter	Nominal valve-train diameter
	2" 65 80 100 125 150	2" 65 80 100 125 150
	Nominal diameter of gas butterfly	Nominal diameter of gas butterfly
	80 80 80 80 80 80	80 80 80 80 80 80

Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³	
2400	92 57 43 36 34 33
2700	112 68 51 42 39 37
3000	134 80 59 47 44 42
3300	159 93 68 54 50 48
3600	186 108 77 61 56 53
3900	215 123 88 68 62 59
4200	247 140 99 76 69 66
4500	281 158 111 85 77 73

Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³	
2400	126 75 55 45 41 40
2700	154 90 65 52 48 46
3000	186 107 76 59 54 52
3300	221 125 88 68 61 58
3600	259 145 101 77 69 66
3900	- 166 114 86 78 73
4200	- 189 129 97 86 82
4500	- 214 145 108 96 90

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar.

Refer to the burner's rating plate for the maximum connection pressure.

Gas valve train sizing

Sizes 60 and 70, version 3LN – multiflam[®]

RGL60/1-B 3LN			RGL60/2-A 3LN		
Burner rating kW Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar) Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100 100	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve) Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100 100	Burner rating kW Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar) Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100 100	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve) Nominal valve-train diameter 2" 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100 100		
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³			
3100	145 86 64 52 48 46	83 57 50 44 43 42	3500	160 85 57 41 36 34	82 49 39 32 31 30
3300	161 95 70 56 52 49	92 63 54 48 46 46	4000	204 107 70 49 43 40	103 60 47 39 36 35
3600	188 110 79 63 58 55	106 71 61 54 52 51	4300	233 121 78 55 47 44	117 68 53 43 40 39
3900	217 125 90 70 64 61	121 81 69 60 58 57	4500	254 132 84 59 50 47	127 73 57 46 43 42
4200	249 142 101 79 72 68	138 91 77 67 64 64	4800	287 148 94 65 56 51	143 82 63 51 47 46
4500	283 161 113 87 79 75	156 102 86 75 72 70	5000	- 160 101 69 59 55	155 88 68 54 50 49
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³			
3100	199 114 81 64 58 55	110 73 62 54 52 51	5300	- 178 112 76 65 60	172 98 75 59 55 54
3300	222 126 89 69 63 60	122 80 67 59 56 55	5500	- 191 120 81 69 63	185 105 80 63 59 57
3600	260 146 102 78 71 67	142 92 77 66 64 62	5800	- 211 132 89 76 69	- 115 88 69 64 63
3900	- 168 116 88 79 75	163 105 87 75 71 70	Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		
4200	- 192 132 99 89 84	187 118 98 83 80 78	3500	222 115 73 50 43 40	110 63 49 39 36 35
4500	- 217 148 111 99 93	- 133 109 93 89 87	4000	287 146 92 62 53 48	141 79 61 48 44 43
				4300	- 167 104 70 59 54
				4500	- 182 113 76 64 58
				4800	- 206 127 85 71 65
				5000	- 222 137 91 77 70
				5300	- 249 153 101 85 77
				5500	- 268 164 109 91 83
				5800	- 297 182 120 101 91
					- 159 120 93 85 83
RGL70/1-B 3LN			RGL70/2-A 3LN		
Burner rating kW Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar) Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve) Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	Burner rating kW Low-pressure supply (with FRS) (flow pressure in mbar into shut-off valve, $p_{s, max} = 300$ mbar) Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100	High-pressure supply (with HP regulator), (flow pressure in mbar into double solenoid valve) Nominal valve-train diameter 65 80 100 125 150 Nominal diameter of gas butterfly 100 100 100 100 100		
Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³		Natural gas E (N) $H_i = 10.35$ kWh/mn ³ ; $d = 0.606$; $W_i = 13.295$ kWh/mn ³			
3500	87 58 43 38 36	51 41 34 32 32	5000	141 83 51 41 36	92 63 43 37 35
4000	111 73 53 46 43	64 51 42 40 39	5500	169 98 60 48 42	83 59 42 38 36
4500	137 90 64 56 52	79 63 51 48 47	6000	200 115 70 55 49	98 69 49 44 42
5000	167 108 76 66 62	95 75 61 57 56	6500	233 134 80 63 55	114 80 56 50 48
5500	199 128 89 77 72	113 88 72 67 65	7000	269 154 92 72 63	131 91 64 57 54
6000	233 149 103 89 82	131 102 82 77 75	7500	- 175 104 81 70	149 104 72 64 61
6500	270 171 117 100 92	151 117 93 87 85	8000	- 198 116 91 79	168 117 81 72 68
7000	- 194 131 112 103	171 131 104 97 94	9100	- 252 147 114 98	- 148 102 90 85
Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³		Natural gas LL (N) $H_i = 8.83$ kWh/mn ³ ; $d = 0.641$; $W_i = 11.029$ kWh/mn ³			
3500	117 76 53 46 43	66 51 42 39 38	5000	195 110 64 49 42	92 63 43 37 35
4000	152 98 68 59 54	85 67 54 50 49	5500	235 132 76 58 50	111 75 51 44 42
4500	191 122 85 73 67	107 83 67 63 61	6000	278 156 89 68 59	132 89 60 52 50
5000	234 148 102 88 81	131 101 81 76 74	6500	- 182 104 79 68	154 104 70 61 58
5500	280 177 121 103 95	156 120 96 89 87	7000	- 210 120 91 78	178 121 81 71 67
6000	- 206 140 119 109	182 140 111 103 100	7500	- 241 137 104 89	- 138 93 81 76
6500	- 236 159 134 122	- 159 125 115 112	8000	- 273 155 118 101	- 157 105 92 87
7000	- 267 177 148 135	- 177 138 127 123	9100	- - 200 152 129	- - 136 118 112

The combustion chamber pressure in mbar must be added to the minimum gas pressure determined from the above chart.

For low-pressure supplies, EN 88-compliant governors with safety diaphragms are used. The maximum permissible supply pressure into the shut-off valve for low pressure installations is 300 mbar.

For high-pressure supplies, EN 334-compliant high-pressure regulators should be selected from the brochure "Pressure regulators with safety devices for Weishaupt gas and dual-fuel burners". This brochure details high-gas-pressure sets suitable for supply pressures of up to 4 bar. Refer to the burner's rating plate for the maximum connection pressure.

Scope of delivery, special equipment

Sizes 30 to 70, version 3LN – multiflam®

Scope of delivery	RGL30	RGL40	RGL50	RGL60	RGL70
Burner housing, hinged flange, housing cover, Weishaupt burner motor, air-inlet housing, fan wheel, combustion head, ignition unit, ignition cable, ignition electrodes, atomisation system with oil nozzle(s), combustion manager with control unit, flame sensor, stepping motors, flange gasket, limit switch on hinged flange, fixing screws	●	●	●	●	●
W-FM 100 combustion manager	●	●	●	●	●
Double gas solenoid valve (Class A)	●	●	●	●	●
Ignition gas unit	●	●	●	●	●
Gas butterfly valve	●	●	●	●	●
Air-pressure switch	●	●	●	●	●
Low-gas-pressure switch	●	●	●	●	●
Mixing assembly with modulating diffuser	●	●	●	●	●
Stepping motor for					
Air regulator	●	●	●	●	●
Gas butterfly valve	●	●	●	●	●
Mixing assembly	●	●	●	●	●
Special equipment					
Air-inlet flange for duct connection	○	○	○	○	○
Solenoid valve for air-pressure switch test with continuously running fan or post-purge	○	○	○	○	○
Combustion-head extension	○	○	○	○	○
Integral capacity controller for W-FM 100	○	○	○	○	○
Variable speed drive	○	○	○	○	○
O ₂ trim	○	○	○	○	○
W-FM supplied loose for mounting in a control panel	○	○	○	○	○
Bus interface	○	○	○	○	○
TRD 24h/72 h execution	○	○	○	○	○
High-gas-pressure switch	○	○	○	○	○

- Standard
- Optional

Please enquire or see the price list for additional special equipment.

Technical data

Sizes 30 to 50, version 3LN – multiflam®

Technical data		RGL30/2-A 3LN		RGL40/2-A 3LN		
400 V, 3 ~ burner motor ¹⁾	Type	W-D112/140-2/4K5	W-D112/170-2/7K0			
Nominal rating	kW	4.5	7			
Current draw at 400 V	A	9.1	15			
Motor pre-fusing (ΥΔ motor start)	A	16	25			
Speed (50 Hz)	rpm	2900	2900			
Fan wheel	Colour	blue	blue			
	ø	268 x 104	295 x 104			
Combustion manager	Type	W-FM 100	W-FM 100			
Ignition unit	Type	W-ZG02	W-ZG02			
Stepping motor	Air	Type	SQM45	SQM45		
	Fuel	Type	SQM45	SQM45		
	Mixing assembly	Type	SQM48	SQM48		
Integral pump	Type	TA3C	TA3C			
Oil solenoid valves	115 V (supply)	Type	121 K 6220 (x 2)	321 H 2322 (x 2)		
	115 V (return)	Type	121 G 2320 (x 2)	121 G 2320 (x 2)		
Oil-pressure switch (return, fuel oil EL - 5 bar)	1 – 10 bar	Type	DSA 46 F001	DSA 46 F001		
Oil hoses	DN / length	20 / 1000	20 / 1000			
Burner weight	kg (approx.)	145	160			
Weight (DMV and fittings)	DN	65	80	100	125	150
	kg (approx.)	65	80	130	220	240

Technical data		RGL50/1-B 3LN		RGL50/2-A 3LN		
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/170-2/9K0	W-D132/210-2/14K0			
Nominal rating	kW	9	14			
Current draw at 400 V	A	18	28			
Motor pre-fusing (ΥΔ motor start)	A	35	50			
Speed (50 Hz)	rpm	2920	2920			
Fan wheel	Colour	blue	black			
	ø	345 x 104.5	355 x 104.5			
Combustion manager	Type	W-FM 100	W-FM 100			
Ignition unit	Type	W-ZG02	W-ZG02			
Stepping motor	Air	Type	SQM45	SQM45		
	Fuel	Type	SQM45	SQM45		
	Mixing assembly	Type	SQM48	SQM48		
Integral pump	Type	TA4C	T2C			
Oil solenoid valves	115 V (supply)	Type	321 H 2322 (x 2)	321 H 2322 (x 2)		
	115 V (return)	Type	121 G 2320 (x 2)	121 G 2320 (x 2)		
Oil-pressure switch (return, fuel oil EL - 5 bar)	1 – 10 bar	Type	DSA 46 F001	DSA 46 F001		
Oil hoses	DN / length	25 / 1300	25 / 1300			
Burner weight	kg (approx.)	235	240			
Weight (DMV and fittings)	DN	65	80	100	125	150
	kg (approx.)	65	80	130	220	240

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

Technical data

Sizes 60 and 70, version 3LN – multiflam®


Technical data		RGL60/1-B 3LN			RGL60/2-A 3LN			
400 V, 3 ~ burner motor ¹⁾	Type	W-D132/210-2/14K0			W-D132/210-2/14K0			
Nominal rating	kW	14			14			
Current draw at 400 V	A	28			28			
Motor pre-fusing (ΥΔ motor start)	A	50			50			
Speed (50 Hz)	rpm	2920			2920			
Frequency convertor with braking resistor	Type	FC301 P11K IP20			–			
Fan wheel	Colour / ø	– / 515 x 127.5			– / 515 x 127.5			
Combustion manager	Type	W-FM 200			W-FM 100			
Ignition unit	Type	W-ZG02			W-ZG02			
Stepping motor	Air	Type	SQM45			SQM45		
	Fuel	Type	SQM45			SQM45		
	Mixing assembly	Type	SQM48			SQM48		
Integral pump	Type	T2C			T2C			
Oil solenoid valves	115 V (supply)	Type	321 H 2322 (x 2)			321 H 2322 (x 2)		
	115 V (return)	Type	121 G 2320 (x 2)			121 G 2320 (x 2)		
Oil-pressure switch (return, fuel oil EL - 5 bar)	1 – 10 bar	Type	DSA 46 F001			DSA 46 F001		
Oil hoses	DN / length	25 / 1300			25 / 1300			
Burner weight	kg (approx.)	345			330			
Weight (DMV and fittings)	DN	65	80	100	125	150		
	kg (approx.)	65	80	130	220	240		

Technical data		RGL70/1-B 3LN			RGL70/2-A 3LN			
400 V, 3 ~ burner motor ¹⁾	Type	W-D160/240-2/18K0			W-D160/240-2/22K0			
Nominal rating	kW	18			22			
Current draw at 400 V	A	34.5			44			
Motor pre-fusing (ΥΔ motor start)	A	63			63			
Speed (50 Hz)	rpm	2950			2940			
Fan wheel	Colour / ø	blue / 590 x 160			blue / 590 x 160			
Combustion manager	Type	W-FM 100			W-FM 100			
Ignition unit	Type	W-ZG02			W-ZG02			
Stepping motor	Air	Type	SQM45			SQM45		
	Fuel	Type	SQM45			SQM45		
	Mixing assembly	Type	SQM48			SQM48		
Integral pump	Type	T2C (< 450 kg/h) T3C (> 450 kg/h)			T3C			
Oil solenoid valves	115 V (supply)	Type	321 H 2522 (x 2)			321 H 2522 (x 2)		
	115 V (return)	Type	121 G 2520 (x 2)			121 G 2520 (x 2)		
Oil-pressure switch (return, fuel oil EL - 5 bar)	1 – 10 bar	Type	DSA 46 F001			DSA 46 F001		
Oil hoses	DN / length	25 / 1300			25 / 1300			
Burner weight	kg (approx.)	435			435			
Weight (DMV and fittings)	DN	65	80	100	125	150		
	kg (approx.)	65	80	130	220	240		

¹⁾ The electrical motors are high-efficiency IE2 motors in accordance with Commission Regulation (EC) No. 640/2009.

Oil burner dimensions

Sizes 30 to 70

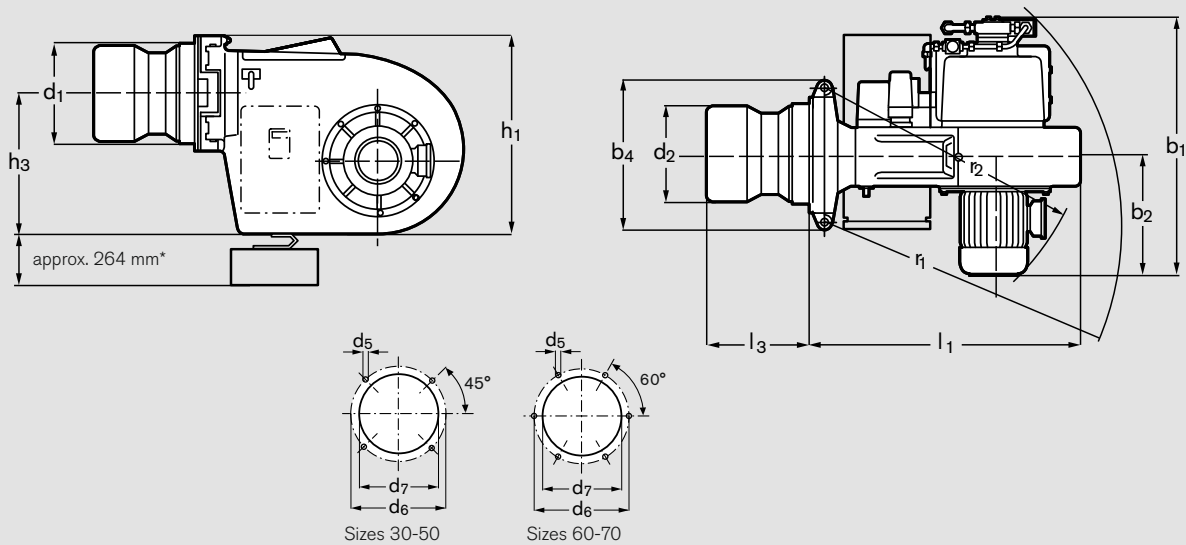


* varies according to oil preheater

Burner type	Dimensions in mm													
	b ₁	b ₂	b ₄	d ₁	d ₂	d ₅	d ₆	d ₇	h ₁	h ₃	l ₁	l ₃	r ₁	r ₂
MS30Z/2-A	813	399	418	280	250	M12	360	285	572	407	892	303	950	890
RMS30/2-A	815	399	418	280	250	M12	360	285	572	407	892	303	950	890
MS40Z/1-B	887	441	462	280	250	M12	360	285	607	422	937	303	1100	970
RMS40/1-B	889	441	462	280	250	M12	360	285	607	422	937	303	1100	970
RMS40/2-A	889	441	462	320	290	M12	400	325	607	422	937	361	1100	970
L50T/2-A	992	493	550	380	280	M16	480	390	728	513	990	357	1100	1025
RL50/1-B	970	463	550	320	290	M12	400	330	728	513	985	361	1100	1000
RMS50/1-B	970	463	550	320	290	M12	400	330	728	513	985	361	1100	1000
RL50/2-A	993	493	550	380	350	M16	480	390	728	513	990	386	1100	1025
RMS50/2-A	993	493	550	380	350	M16	480	390	728	513	990	386	1100	1025
RL60/2-A	1100	517	670	429	400	M16	470	435	930	670	1189	407	1260	1140
RMS60/2-A	1132	517	670	429	400	M16	470	435	930	670	1189	407	1260	1140
RL70/1-A	1277	603	760	470	480	M16	550	500	1075	775	1368	417	1500	1310
RMS70/1-A	1290	603	760	470	480	M16	550	500	1075	775	1368	417	1500	1310
RL70/2-A	1297	623	760	470	480	M16	550	500	1075	775	1368	417	1500	1310
RMS70/2-A	1310	623	760	470	480	M16	550	500	1075	775	1368	417	1500	1310
RL30/2-A 3LN	811	399	418	280	256	M12	360	285	572	407	892	359	950	890
RL40/2-A 3LN	889	441	462	320	296	M12	400	325	607	422	937	376	1100	970
RL50/1-B 3LN	970	463	550	320	296	M12	400	325	728	513	990	376	1100	1000

See manual for further dimensions

Gas burner dimensions

Sizes 30 to 70

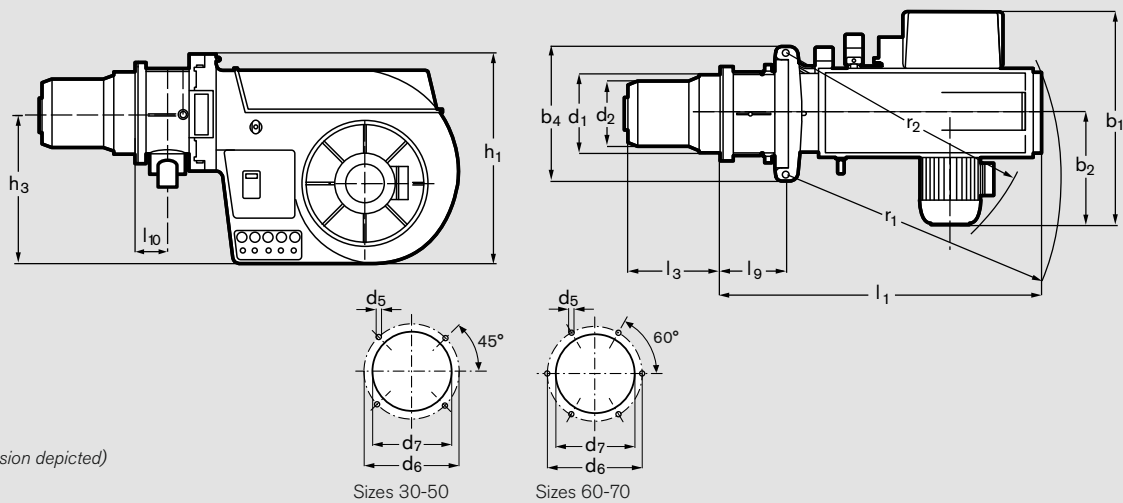


Burner type	Dimensions in mm															
	b1	b2	b4	d1	d2	d5	d6	d7	h1	h3	l1	l3	l9	l10	r1	r2
G50/1-B ZM-NR	883	460	550	320	290	M12	400	325	730	513	1200	332	258	133	1060	1050
G50/2-A ZM-NR	905	505	550	382	350	M16	480	390	730	513	1249	332	308	158	1060	1050
G60/2-A ZM-NR	1010	517	670	432	400	M16	470	435	930	670	1478	357	348	178	1250	1140
G70/1-B ZM-NR	1169	646	760	432	400	M16	470	435	1075	775	1648	357	348	178	1440	1310
G70/3-A ZM-NR	1145	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1440	1310
G70/4-A ZM-NR	1145	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1440	1310
G50/1-B ZM-1LN	883	460	550	320	290	M12	400	325	730	513	1200	332	258	133	1060	1050
G50/2-A ZM-1LN	905	505	550	382	350	M16	480	390	730	513	1249	447	308	158	1060	1050
G70/1-B ZM-1LN	1169	646	760	432	406	M16	470	435	1075	775	1648	419	348	178	1440	1310
G70/2-A ZM-1LN	1190	622	760	470	480	M16	550	500	1075	775	1668	447	368	188	1440	1310
G50/1-B ZM-LN	883	460	550	320	296	M12	400	325	730	513	1200	367	258	133	1060	1050
G50/2-A ZM-LN	905	505	550	382	350	M16	480	390	730	513	1249	387	308	158	1060	1050
G60/2-A ZM-LN	1010	517	670	432	406	M16	470	435	930	670	1478	432	348	178	1250	1140
G70/1-B ZM-LN	1169	601	760	432	406	M16	470	435	1075	775	1648	432	348	178	1440	1310
G70/2-A ZM-LN	1190	622	760	470	480	M16	550	500	1075	775	1668	437	368	188	1440	1310
G30/2-A 3LN	729	400	418	280	256	M12	360	285	572	407	1083	366	238	123	840	890
G40/2-A 3LN	795	441	462	320	296	M12	400	325	607	422	1148	380	258	133	895	970
G50/1-B 3LN	883	460	550	320	296	M12	400	325	730	513	1200	380	258	133	1060	1050
G50/2-A 3LN	905	505	550	382	335	M16	480	390	730	513	1249	450	308	158	1060	1050
G60/1-B 3LN	1010	517	670	432	334	M16	470	435	930	670	1478	431	348	178	1350	1140
G60/2-A 3LN	1010	517	670	432	376	M16	470	435	930	670	1478	480	348	178	1350	1140
G70/1-B 3LN	1214	646	760	432	376	M16	470	435	1075	775	1648	480	348	178	1500	1310
G70/2-A 3LN	1190	622	760	470	444	M16	550	500	1075	775	1668	475	368	188	1500	1310

See burner manual for additional dimensions

* Pilot line connection 805 mm

Dual-fuel burner dimensions

Sizes 30 to 70

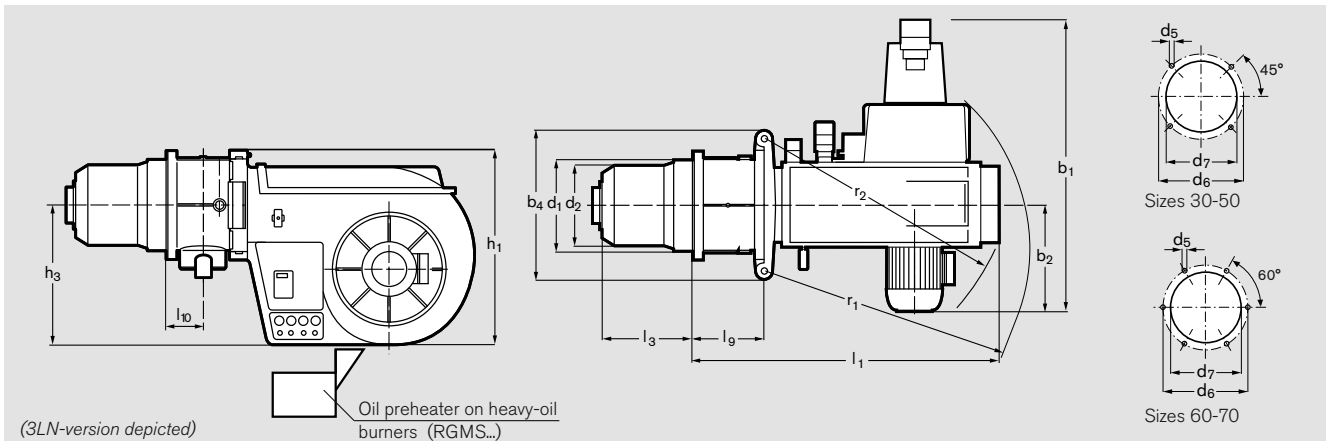


Burner type	Dimensions in mm															
	b1	b2	b4	d1	d2	d5	d6	d7	h1	h3	l1	l3	l9	l10	r1	r2
RGL30/2-A ZM-NR	931	400	418	280	250	M12	360	285	572	407	1083	272	238	123	970	915
RGL40/1-B ZM-NR	983	431	462	280	250	M12	360	285	607	422	1128	272	238	123	1050	970
RGL40/2-A ZM-NR	983	431	462	320	290	M12	400	325	607	422	1148	332	258	133	1050	970
RGL50/1-B ZM-NR	1092	460	550	320	290	M12	400	325	730	513	1195	332	258	133	1180	1050
RGL50/2-A ZM-NR	1146	505	550	382	350	M16	480	390	730	513	1249	332	308	158	1180	1050
RGL60/2-A ZM-NR	1245	517	670	432	400	M16	470	435	930	670	1478	357	348	178	1350	1140
RGL70/1-B ZM-NR	1454	646	760	432	400	M16	470	435	1075	775	1646	357	348	178	1500	1310
RGL70/2-A ZM-NR	1430	622	760	470	480	M16	550	500	1075	775	1666	362	368	188	1500	1310
RGL70/3-A ZM-NR	1430	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1500	1310
RGL70/4-A ZM-NR	1430	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1500	1310
RGMS30/2-A NR	931	400	330	280	250	M12	360	285	572	407	1083	272	338	123	970	915
RGMS40/1-B NR	967	403	330	280	250	M12	360	285	608	422	1129	272	338	123	1050	970
RGMS40/2-A NR	967	403	370	320	290	M12	400	325	608	422	1148	330	358	133	1050	970
RGMS50/1-B ZM-NR	1092	460	550	320	290	M12	400	325	730	513	1195	332	258	133	1180	1050
RGMS50/2-A ZM-NR	1146	505	550	382	350	M16	480	390	730	513	1249	332	308	158	1180	1050
RGMS60/2-A ZM-NR	1132	517	670	432	400	M16	470	435	930	670	1478	357	348	178	1350	1140
RGMS70/1-B ZM-NR	1290	646	760	432	400	M16	470	435	1075	775	1646	357	348	178	1500	1310
RGMS70/2-A ZM-NR	1310	622	760	470	480	M16	550	500	1075	775	1666	362	368	188	1500	1310
RGMS70/3-A ZM-NR	1310	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1500	1310
RGMS70/4-A ZM-NR	1310	622	760	510	480	M16	580	530	1075	775 *	1660	467	368	186	1500	1310
RGL50/1-B ZM-1LN	1092	460	550	320	290	M12	400	325	730	513	1195	332	258	133	1180	1050
RGL50/2-A ZM-1LN	1146	505	550	382	350	M16	480	390	730	513	1249	447	308	158	1180	1050
RGL70/1-B ZM-1LN	1454	646	760	432	406	M16	470	435	1075	775	1648	419	348	178	1500	1310
RGL70/2-A ZM-1LN	1430	622	760	470	480	M16	550	500	1075	775	1668	447	368	188	1500	1310
RGL30/2-A 3LN	924	400	418	280	256	M12	360	285	572	407	1083	366	238	123	970	890
RGL40/2-A 3LN	990	441	462	320	296	M12	400	325	607	422	1148	380	258	133	1050	970
RGL50/1-B 3LN	1098	460	550	320	296	M12	400	325	730	513	1195	380	258	133	1180	1050
RGL50/2-A 3LN	1146	505	550	382	335	M16	480	390	730	513	1249	450	308	158	1180	1050
RGL60/1-B 3LN	1245	517	670	432	334	M16	470	435	930	670	1478	431	348	178	1350	1140
RGL60/2-A 3LN	1245	517	670	432	376	M16	470	435	930	670	1478	480	348	178	1350	1140
RGL70/1-B 3LN	1454	646	760	432	376	M16	470	435	1075	775	1648	480	348	178	1500	1310
RGL70/2-A 3LN	1430	622	760	470	444	M16	550	500	1075	775	1668	475	368	188	1500	1310

See manual for further dimensions


* Pilot line connection 805 mm

Fuel systems


L50T (oil-side)

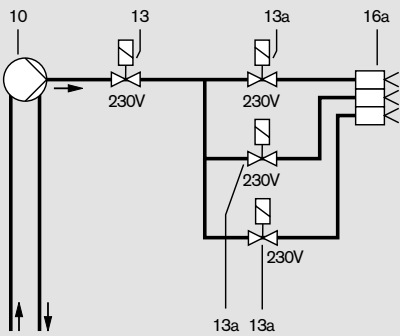


RGL30, version ZM-NR

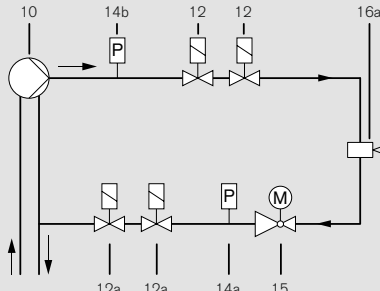


**RL50 to RL70
RGL40 to RGL70 (oil-side)**

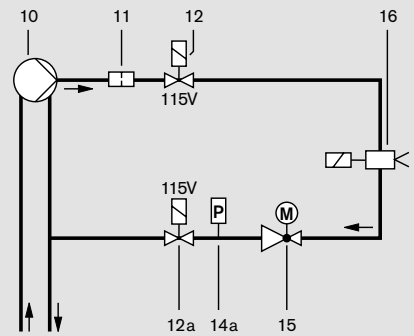


MS30Z/2-A, MS40Z/1-B

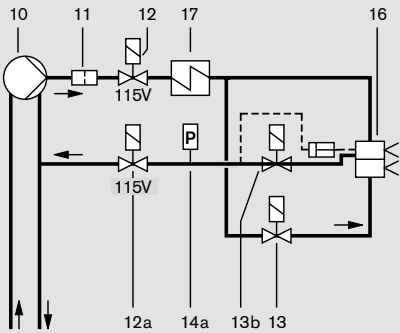


**RMS30 to RMS50
RGMS30 to RGMS50 (oil-side)
Integral oil pump and preheater**

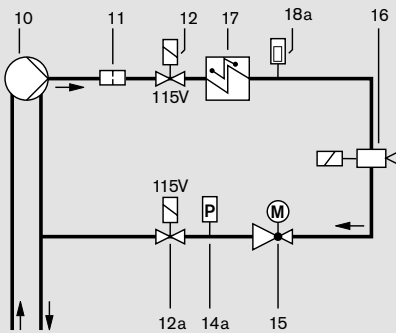


**RMS60 and RMS70
with separate oil pump and preheater stations**

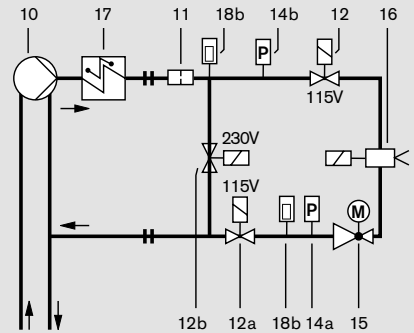


**RL30 to RL50, version 3LN
RGL30 to RGL70, version 3LN (oil-side)**

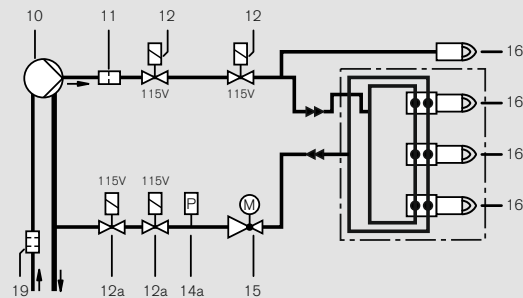


**G50 to G70, version NR (gas-side)
RGL30 to RGL70, vers. 3LN (gas-side)
with DMV solenoid valves**

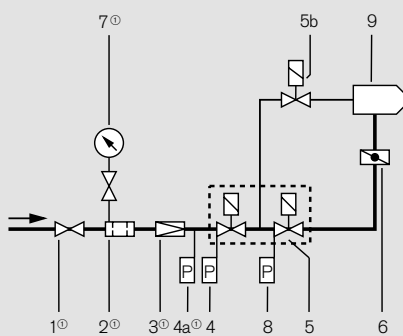

**G50 to G70, versions 1LN and 3LN
with DMV solenoid valves**

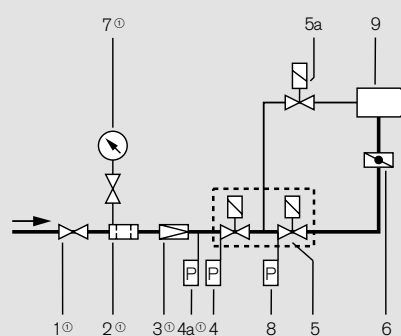

**G50 to G70, version LN
with DMV solenoid valves**

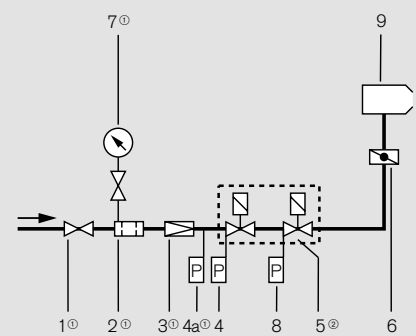

Legend

- 1 Ball valve ①
- 2 Gas filter ①
- 3 Pressure regulator (LP) ①
- 4 Low-gas-pressure switch
- 4a High-gas-pressure switch (for TRD) ①
- 5 Double solenoid valve (DMV) ②
- 5a Pilot line solenoid valve
- 6 Gas butterfly valve
- 7 Pressure gauge with push-button valve ①
- 8 Valve-proving pressure switch ①
- 9 Burner
- 10 Oil pump

- 11 Strainer
- 12 Normally closed solenoid valve
(115 V, switched in series with 12a)
- 12a Normally closed solenoid valve
(115 V, switched in series with 12, fitted
against the direction of flow)
- 12b Normally open bypass solenoid valve
- 13 Normally closed solenoid valve
- 13a Normally closed solenoid valve
for stages 1, 2, and 3
- 13b Normally open solenoid valve
- 14a Oil-pressure switch in return

- 14b Oil-pressure switch in supply
- 15 Oil regulator
- 16 Nozzle assembly with shut-off device
- 16a Nozzle assembly without shut-off device
- 17 Oil preheater
- 18a Temperature switch
- 18b PT 100 temperature sensor
(to monitor the minimum oil temperature)
- 19 External oil filter ①

① Not included in burner price.

Pump and preheater stations

Scope of supply: pump stations

Pump unit (screw pump with motor), pressure gauge, vacuum gauge, pressure regulating valve, ball valves, inlet flange, outlet flange including counter-flanges, screws and washers, inlet filter. All parts are supplied piped-up and fully assembled on an oil drip tray.

Pump stations are available as simplex units with one pump, or as duplex units with two pumps. The latter operate as duty/standby sets, enabling a prompt change-over to the second pump in the event the first pump fails.

Only tried-and-tested pump types are used. The pumps stations are carefully matched to the capacity of the burner.

Scope of supply: preheater stations

Preheater stations are supplied piped-up on an oil drip tray. The preheater station continuously regulates the preheat temperature, and thus the viscosity, of the oil which is to be atomised.

Two basic types of oil preheater station are available, WEV and MV:

1. Electric preheating (WEV)
2. Medium preheating (MV)

MV-series medium preheaters

Medium preheaters are high-capacity, forced-circulation heat exchangers that utilise hot water, steam or thermal fluid as their heat-supplying medium. A high-capacity is achieved with a uniform, space-saving construction. The oil preheaters guarantee an extremely stable oil temperature and thus good combustion figures. The oil temperature that can be achieved depends on the heating medium used.

When selecting and sizing the preheater, close attention must be paid to the oil temperature charts in section 5.3 of the manual "*Weishaupt Electric & Media Oil Preheaters*" (Print No. 18).

Weishaupt medium oil preheaters are universally employable. They can be operated on a stand-alone basis or in conjunction with an electric preheater, and the medium used can be changed at any time.

If there is a continual supply of process steam at more than 7.5 bar, or hot water at 180 to 200 °C, then an electric preheater is not needed. This is also the case if the plant can be operated on gas or light oil until this minimum pressure or temperature is reached.

If the medium temperature is not sufficient to adequately preheat the fuel oil, then an electric preheater provides the additional heating required. The electric preheater heats the fuel oil during the start-up of the plant, which can then be switched over to the medium preheater once the required medium temperature is reached, thus saving on expensive electrical energy.

Medium preheater connection fittings should be selected to suit the medium being used. If the medium oil preheater is to be used without an electric preheater, then a mechanical temperature regulator must be used with the medium connection fittings.

Medium preheater connection fittings are not included in preheater prices.

General notes

When starting a heavy-oil-fired boiler from a cold condition, the capacity of the electric preheater must be sufficient to cover at least 30 % of the boiler's rated output.

Installation notes

The oil filter, air/gas separator, circulation tank, pump station, and oil preheater must be installed near the burner.

For burners with separate oil preheaters, the time required for oil circulation during start-up depends upon the distance between the burner and the air/gas separator or circulation tank. The shorter the pipeline, the shorter the time between the call for heat and oil release or burner restart after a controlled shutdown.

Pump and preheater stations

Simplex pump stations (not for burner version 3LN)

Burner Rating, kg/h (approx.)	Technical data - Pump			Station with 1 pump	
	Flow rate, l/h	Speed, rpm	Motor, kW	Pump type	Part No.
Fuel oil EL, 6 mm²s, ρ = 0.84 kg/l, frequency 50 Hz*					
504 – 600	1428	2900	2.20	LFW-15-EL	270 008 01
600 – 789	1878	2900	3.00	LFW-20-EL	270 008 02
789 – 1011	2406	2900	3.00	LFW-26-EL	270 008 03
Fuel oil EL, 6 mm²s, ρ = 0.84 kg/l, frequency 60 Hz*					
474 – 748	1782	3450	2.64	LFW-15-EL	270 008 07
748 – 983	2340	3450	3.60	LFW-20-EL	270 008 08
983 – 1260	3000	3450	3.60	LFW-26-EL	270 008 09
Fuel oil S, 12 mm²s, ρ = 0.98 kg/l, frequency 50 Hz*					
349 – 479	977	2900	1.50	LFW-10-S	270 008 24
479 – 749	1529	2900	2.20	LFW-15-S	270 008 25
749 – 985	2011	2900	3.00	LFW-20-S	270 008 26
Fuel oil S, 12 mm²s, ρ = 0.98 kg/l, frequency 60 Hz*					
282 – 438	894	3450	1.80	LFW-7-S	270 008 30
438 – 594	1212	3450	1.80	LFW-10-S	on application
594 – 923	1884	3450	2.60	LFW-15-S	on application

* Design data for operation

Duplex pump stations (not for burner version 3LN)

Burner Rating, kg/h (approx.)	Technical data - Pump			Station with 2 pumps	
	Flow rate, l/h	Speed, rpm	Motor, kW	Pump type	Part No.
Fuel oil EL, 6 mm²s, ρ = 0.84 kg/l, frequency 50 Hz*					
< 600	1428	2900	2.20	DLC-1800-EL	270 008 12
600 – 789	1878	2900	3.00	DLC-2400-EL	270 008 13
789 – 1011	2406	2900	3.00	DLC-2600-EL	270 008 14
Fuel oil EL, 6 mm²s, ρ = 0.84 kg/l, frequency 60 Hz*					
< 474	1128	3450	1.80	DLC-1200-EL	270 008 18
474 – 748	1782	3450	2.64	DLC-1800-EL	270 008 19
748 – 983	2340	3450	3.60	DLC-2400-EL	270 008 20
Fuel oil S, 12 mm²s, ρ = 0.98 kg/l, frequency 50 Hz*					
349 – 479	977	2900	1.50	DLC-1200-S	270 008 36
479 – 749	1529	2900	2.20	DLC-1800-S	270 008 37
749 – 985	2011	2900	3.00	DLC-2400-S	270 008 38
Fuel oil S, 12 mm²s, ρ = 0.98 kg/l, frequency 60 Hz*					
282 – 438	894	3450	1.80	DLC-900-S	on application
438 – 594	1212	3450	1.80	DLC-1200-S	on application
594 – 923	1884	3450	2.60	DLC-1800S	on application

* Design data for operation

Preheater stations

Type	Quantity	Medium preheater kg/h	Electric preheater kg/h at $\Delta t = 75^\circ\text{C}$	Part No.
WEV3.1/01	1	–	375	170 003 55
WEV3.1/01	2	–	750	170 003 52
WEV3/01	1	–	500	170 002 23
WEV3/01	2	–	1000	170 002 24
MV9C with temperature regulator	1	500	–	170 001 03
MV9C without temperature regulator	1	500	–	170 001 04
MV10A with temperature regulator	1	1000	–	170 000 94
MV10A without temperature regulator	1	1000	–	170 002 30

Details for connection fittings and for other pump stations and preheaters are available upon request.

That's no façade. That's reliability.

Weishaupt is reliability.

The family-owned business from Schwendi in southern Germany was founded by Max Weishaupt in 1932. It is a global player, with branch offices and subsidiaries in 60 countries across the world, and is a market leader for burners, heating and condensing boiler systems, solar technology, heat pumps, and building management systems.

The pioneering Max Weishaupt endowed his business with the core values of trust, quality, customer service, innovation, and experience. That, summed up in a single word, is reliability; something for which Weishaupt stands to this day.



The Weishaupt Forum in Schwendi



Architect Richard Meier, N.Y.

- weishaupt -

Max Weishaupt GmbH
88475 Schwendi
Tel +49 7353 830, Fax +49 7353 83358
www.weishaupt.de

Print No. 83211102, June 2012
Printed in Germany. All rights reserved.

Neachells Lane, Willenhall, WV13 3RG
Tel (01902) 609841, Fax (01902) 633343

We're right where you need us

The security of a comprehensive service network

Weishaupt equipment is available from good HVAC specialists, with whom Weishaupt works in close partnership. To support the specialists, Weishaupt maintains a large sales and service network, ensuring equipment, spares and service are always available.

Weishaupt are there when you need them. The service department is available to Weishaupt customers around the clock, 365 days a year. A Weishaupt office near you is standing by to answer all your heating questions.

